

The Aspen outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Aspen is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for wayfinding and general outdoor illumination. The Aspen features energy-efficient, fully dimmable integrated LED lighting. Available in two finishes, Bronze and Charcoal, and four sizes.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP65 Rated

SPECIFICATIONS

DELIVERED LUMENS	1060
WATTS	38
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	7 lbs.



ASPEN 26
shown in charcoal


ASPEN 26
shown in bronze

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

PRODUCT	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000WASP	927 90 CRI, 2700K 930 90 CRI, 3000K	26 26"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION

ASPEN 26 WALL SCONCE

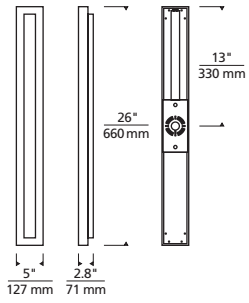


Aspen 26

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASPEN 26

Total Lumen Output: 1060
 Total Power: 38
 Luminaire Efficacy: 28
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B0-U3-G1

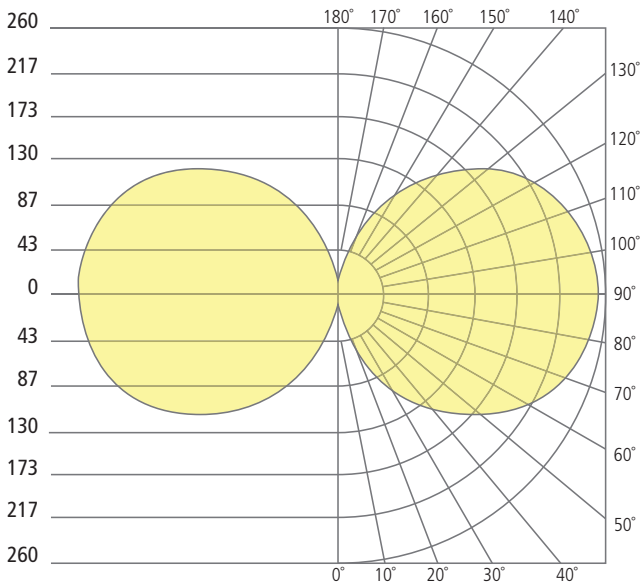

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

