

# MONORAIL T-BAR CONNECTOR

## PRODUCT FEATURES

### LAMPING

The T-bar clip twists into the slat. (Use only if local electrical codes allow).  
Specify 15/16" or 9/16" slat.



MonoRail T-Bar Connector



MonoRail T-Bar Connector

## ORDERING INFORMATION

### 700MOTBAR SHAPE OR SIZE

C 15/16"  
9C 9/16"

### FINISH

B BLACK  
W WHITE

700MOTBAR \_\_\_\_\_

JOB NAME \_\_\_\_\_


NOTES \_\_\_\_\_



# MONORAIL T-BAR CONNECTOR

## SPECIFICATIONS

HARDWARE MATERIAL	
SHADE MATERIAL	
NET WEIGHT	0.5 lbs
HEIGHT	0.5in
WIDTH	1.4in
LENGTH	
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

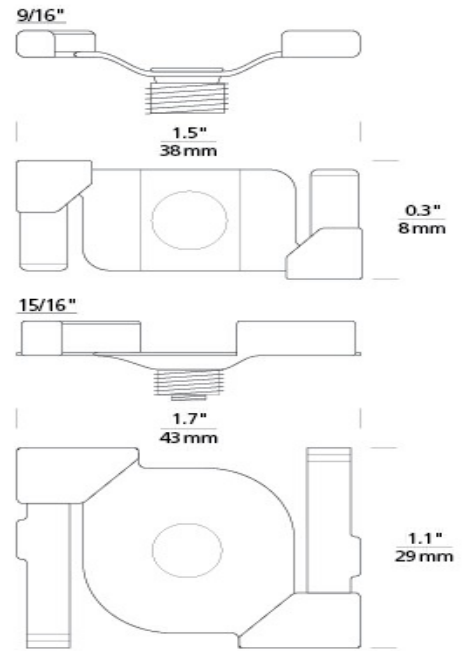

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE				
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?			Y	
WARRANTY**				

\*Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)  
 \*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 <b>Title 24</b> Part 6.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 <b>Title 20</b> and may be shipped to and sold in California.			N/A

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

