

Clean, modern design and outstanding light performance distinguish Taag high output LED wall packs. Designed for outdoor security and general illumination, Taag 6 is ideal in commercial and residential applications for which well-defined illumination is required.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	625.2
WATTS	10.2
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV, Triac
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	2.5 lbs.

* Visit techlighting.com for specific warranty limitations and details.



TAAG 6
shown in bronze




TAAG 6
shown in charcoal

ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000WTAG	830 80 CRI, 3000K 840 80 CRI, 4000K	6 6"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

TAAG 6 WALL

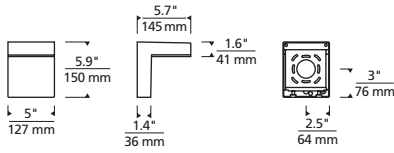


Taag 6

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

TAAG 6

Total Lumen Output:	625.2
Total Power:	10.2
Luminaire Efficacy:	61
Color Temp:	4000K
CRI:	80+
BUG Rating:	B1-U1-G0

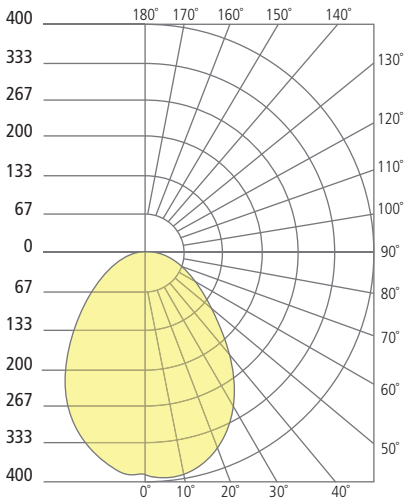

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES
<hr/>	<hr/>	<hr/>
<hr/>	<hr/>	<hr/>