



Basics 9267

project name:	<input type="text"/>
project location:	<input type="text"/>
specifier name:	<input type="text"/>
specifier location:	<input type="text"/>
quantity:	<input type="text"/>
fixture type:	<input type="text"/>


modifications:

Base Specs

14"h x 6"w x 5"d

Notes

Marine grade primer available — **±\$ Inquire.**

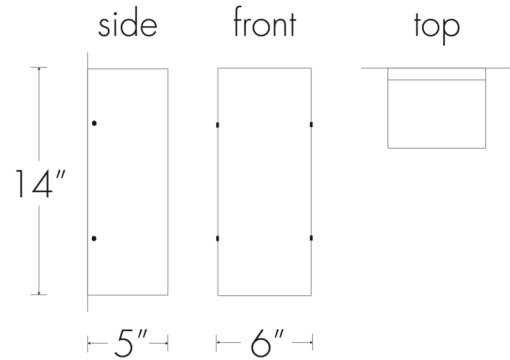



Basics 9267

<table border="0"> <tr> <td style="background-color: #f2f2f2; padding: 5px;">standard finish:</td> <td style="background-color: #d9e1f2; width: 20px;"></td> <td style="background-color: #f2f2f2; padding: 5px;">premium finish:</td> </tr> <tr> <td>N/A</td> <td></td> <td>N/A</td> </tr> </table>	standard finish:		premium finish:	N/A		N/A	<table border="0"> <tr> <td style="background-color: #d9e1f2; padding: 5px;">lamping:</td> </tr> <tr> <td> <p>01: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>02: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>03: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>04: 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p>10: Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>14: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> </td> </tr> </table>	lamping:	<p>01: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>02: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>03: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>04: 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p>10: Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>14: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p>
standard finish:		premium finish:							
N/A		N/A							
lamping:									
<p>01: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>02: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet</p> <p>03: Incandescent, 1 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>04: 14w Integrated LED, 2198 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp</p> <p>10: Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p> <p>14: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp</p>									
<table border="0"> <tr> <td style="background-color: #f2f2f2; padding: 5px;">standard diffuser:</td> <td style="background-color: #d9e1f2; width: 20px;"></td> <td style="background-color: #f2f2f2; padding: 5px;">premium diffuser:</td> </tr> <tr> <td>OA - Opal Acrylic</td> <td></td> <td>CO - Caramel Onyx FA - Faux Alabaster TS - Tea Stained WS - White Swirl</td> </tr> </table>	standard diffuser:		premium diffuser:	OA - Opal Acrylic		CO - Caramel Onyx FA - Faux Alabaster TS - Tea Stained WS - White Swirl			
standard diffuser:		premium diffuser:							
OA - Opal Acrylic		CO - Caramel Onyx FA - Faux Alabaster TS - Tea Stained WS - White Swirl							

