



Basics 9268

project name:	
project location:	
specifier name:	
specifier location:	
quantity:	
fixture type:	


modifications:

Base Specs

10"h x 5"w x 4"d

Notes

Marine grade primer available — **±\$ Inquire.**

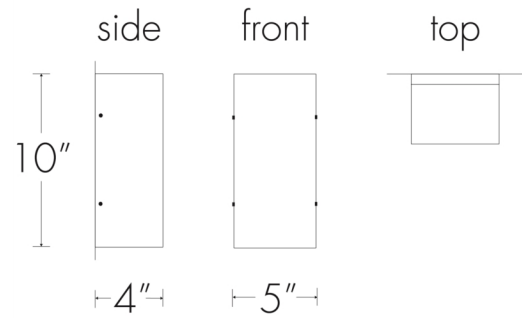



Basics 9268

standard finish:		premium finish:		lamping:	
N/A		N/A		02: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Wet	
				03: Incandescent, 1 x E12 - 60W max ea, Candelabra, 120V, Standard Phase Dimming, UL/cUL Dry/Damp	
				04: 9.38w Integrated LED, 1444 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp	
				10: Wattage Restriction Label - 1 x E26 for LED Retrofit 20W max ea - T-10, 120V, Standard Phase Dimming, UL/cUL Dry/Damp	
				14: 8.4w Integrated LED, 1181 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp	

standard diffuser:		premium diffuser:	
OA - Opal Acrylic		CO - Caramel Onyx	
		FA - Faux Alabaster	
		TS - Tea Stained	
		WS - White Swirl	

