

ASSEMBLY INSTRUCTIONS

Holborn Large Pendant
Item # CHC 2216

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.






Illustration A:

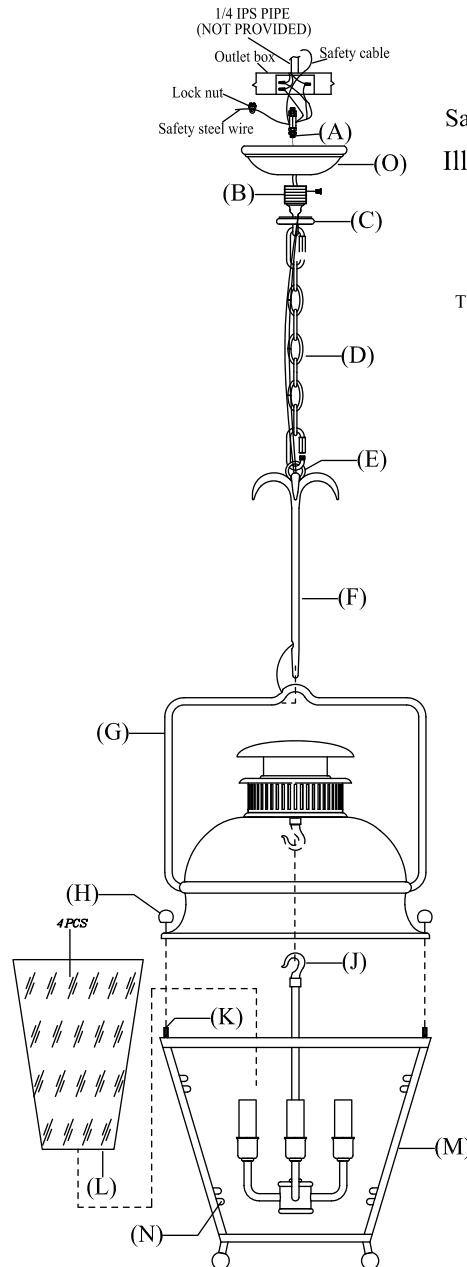

To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the lock nut (a).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

1. Carefully remove all parts from the carton.
2. Loosen set screws (H) from top of nipple (K), and remove metal frame (M).
3. To insert glass panels (L) to the metal frame (M). Make sure metal tabs (N) are flipped up. To secure glass panels by bending back metal tabs (N) downwards.
4. Hook assembly part (J) to inner of handle cap.
5. Attach metal frame (M) to handle cap, letting nipples (K) pass through the holes on handle cap and secure with set screws (H).
6. Hook sleeve (F) to assembly part (G). (See left illustration)
7. Attach chain (D) to top loop (E) by opening / closing end link of chain.
8. Feed the wire through chain (D), mounting loop (B) and nipple (A).
9. Unscrew canopy ring (C), slide canopy ring (C) and canopy (O) on chain (D).
10. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
11. Attach mounting loop (B) to thread nipple (A) using the ceiling loop screw.
12. Open the end link of chain and screw chain mounting loop (B) to the nipple using set screw and hook the chain (D) to mounting loop (B) by closing the end cut link.
13. Connect ground wire from the light fixture (bare copper) to ground wire green or copper in color). Fasten together with a plastic wire connector provided and tightly wrap the wire from ceiling outlet box (usually connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
14. Connect both hot wires (smooth wire) from the fixture to the hot junction box wire from ceiling outlet box (usually BLACK). Fasten together with a plastic wire connector provided and tightly wrap wire connector with electrical tape.
15. Repeat this procedure for the neutral wires (ribbed wire) from the light fixture to the wire from ceiling outlet box (usually WHITE). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
16. Tuck wire connections neatly into ceiling outlet box.
17. Insert top thread nipple (A) in mounting 1/4 IPS pipe.
18. Slip canopy (O) to ceiling and secure with threaded canopy ring (C).
19. Insert the specified light bulbs into the sockets.
20. Now installation is complete. Return power to the junction box and test the fixture.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.