


ASSEMBLY INSTRUCTIONS

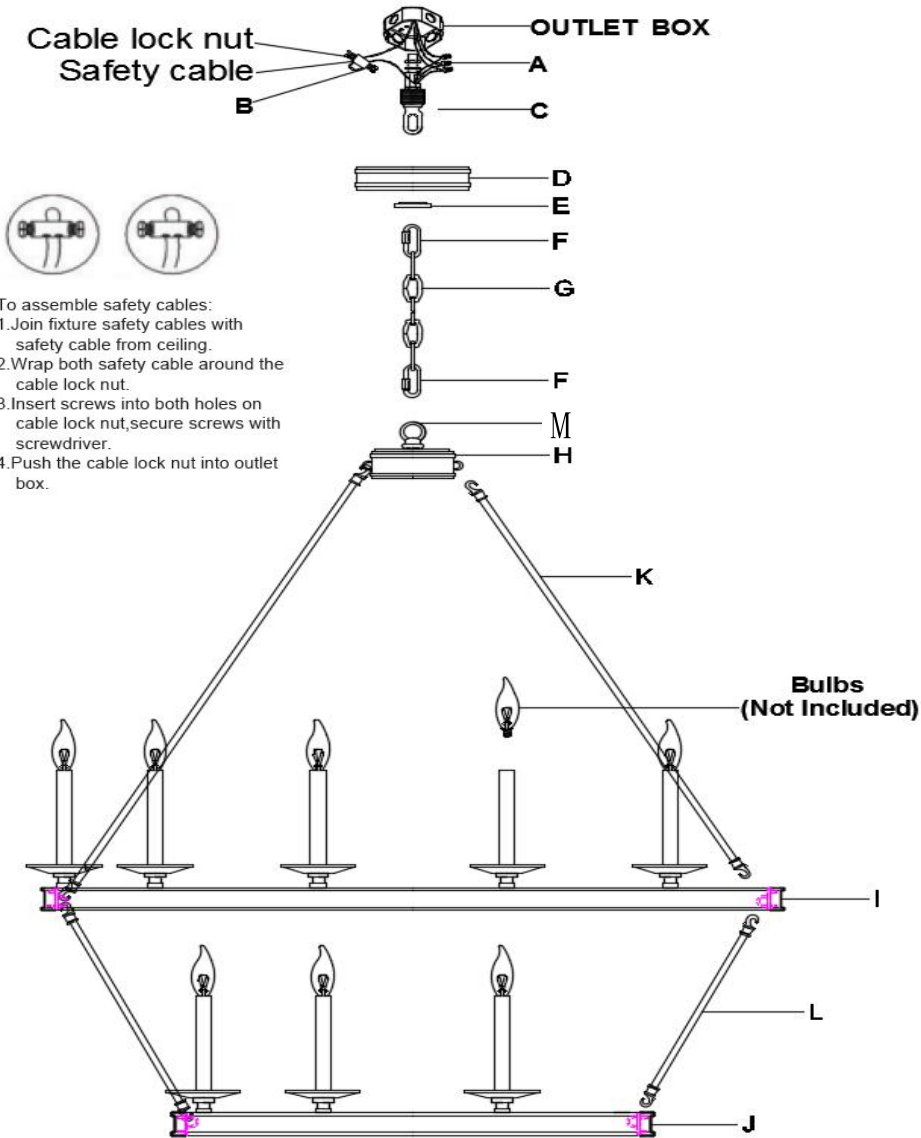

- To assemble safety cables:
1. Join fixture safety cables with safety cable from ceiling.
 2. Wrap both safety cable around the cable lock nut.
 3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
 4. Push the cable lock nut into outlet box.

Launceton XXL Two Tiered Chandelier

Item# CHC1609

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
 WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.
 IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.
 ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.
 NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING.
 RETAIN ALL PACKING MATERIAL UNTILL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
 2. Provide a 1/4" IPS pipe with one end securely mounted to a beam or structural member. The other end should protrude through the center of the outlet box.
 3. Assemble the chain mounting loop(C), nipple, nuts and hickey to center 1/4" IPS support pipe and adjust overall length to allow the canopy ring(E) to hold the canopy(D) flush to the ceiling.
 4. Unscrew the quick link (F) on another end of chain (G) and hang it onto the ceiling loop of mounting plate(B), close the quick link (F).
 5. Hang up the hooks of rods (K) on the rings of top hub (H) and the rings in top tier metal circle (I).
 6. Hang up the hooks of rods (L) in the rings of top metal circle (I) and the bottom metal circle (J).
 7. Unscrew the quick link (F) on one end of chain (G) and hang it onto the fixture ring(M), close the quick link (F) to secure the fixture body.
 8. Put down the collar ring(E) and canopy(D) through the chain(G).
 9. Lace the fixture wires, ground and safety cable(B) through the chain and loop, exiting through the side of hickey, Run the safety cable though the top of the outlet box and secure to structural member.
 10. Connect the ground wire from the fixture to the ground wire from the outlet box(usually green or copper in color) using wire nut(A).
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
11. Connect the fixture Neutral wire(White) from the fixture to the neutral wire(White) from the outlet box using wire nut(A).
 12. Connect the fixture Hot wire(Black) from the fixture to the Hot wire(Black) from the outlet box using wire nut(A).
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
13. Tuck the wire connections neatly into ceiling outlet box.
 14. Slip canopy (D) flush to ceiling and secure with collar ring (E).
 15. Insert the bulb(not included) into all the sockets.
 16. Installation is completed, turn on power at fuse or circuit breaker.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

