PERLE 240 CHANDELIER

VISUAL COMFORT & Co.

PRODUCT FEATURES

- Hand-blown glass manufactured in Italy

- This item is made of natural brass. It is a living finish that will patina and warm with age which adds richness. If it gets an uneven patina or spots, a brass cleaner can restore the finish

- Remote and surface mount driver options available. An optional mud-in canopy kit can be ordered separately in conjunction with the 'Remote' driver option for the most minimal ceiling appearance

- Contact factory for custom configurations

- For minimal ceiling appearance, order the optional mud-in canopy kit in conjunction with the 'Remote' driver. It can be viewed here. techlighting.com/Products/Fixtures/Accessories/Collier-Mud-in-Plate

- Protected by a 5-year warranty. Please visit the "About Us" Page on techlighting.com for more for warranty details. Patent Pending

LAMPING

Includes 112 watt, 4038 total delivered lumens, 90 CRI 2700K or 3000K LED modules. Remote dimmable with most LED compatible ELV and TRIAC dimmers. 277V dimmable with 0-10V dimmers. Surface dimmable with ELV and TRIAC dimmers. Remote 120V or 277V. Surface 120V-277V. Can be installed on a sloped ceiling up to 45°.

Natural Brass

Natural Brass   Polished Nickel   Dark Bronze

ORDERING INFORMATION

SLCH227	COLOR TEMP	FINISH	LAMP	
	27 2700K	BZ DARK BRONZE	R	REMOTE
	30 3000K	NB NATURAL BRASS	R-277	REMOTE 277V
		N POLISHED NICKEL	S	SURFACE

SLCH227

JOB NAME

NOTES

PERLE 240 CHANDELIER

VISUAL COMFORT & Co.

SPECIFICATIONS

PRIMARY MATERIAL	Glass
SHADE MATERIAL	Glass
NET WEIGHT	49 lbs
HEIGHT	254.8in
WIDTH	2.8in
LENGTH	2.8in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
MIN. HANGING HEIGHT	254.8in
MAX HANGING HEIGHT	257.8in
TOTAL CORD LENGTH	
TOTAL STEM LENGTH	
STEM QTY	
SLOPED CEILING ADAPTABLE?	Yes 45° Max
GENERAL LISTING	ETL Listed
INCLUDES	

REMOTE CANOPY/MUD PLATE

4.5" / 114 mm
.8" / 20 mm
3.2" / 81 mm
254.8" / 6472 mm
2.8" / 72 mm
12" min - 234" max
24" min - 119.7" max

SURFACE CANOPY

5.4" / 136 mm
4.2" / 107 mm
3.2" / 81 mm
258.2" / 6558 mm
2.6" / 64 mm
12" min - 234" max
27.4" min - 123.1" max
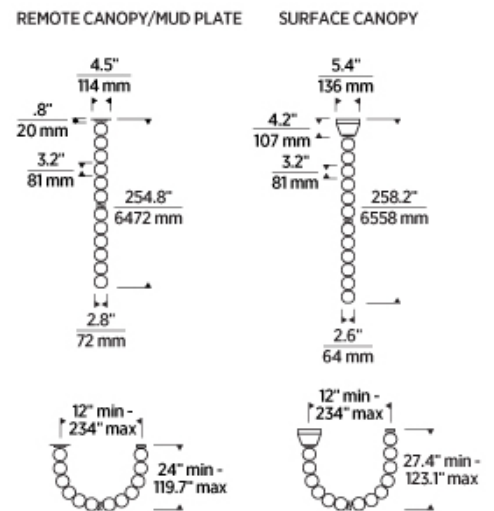
LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		4038		
WATTS		112		
MAX WATTAGE PER BULB		112W		
		120V ELV, TRIAC 277V 0-10V Universal 120V-277V ELV, TRIAC		
CCT		2700K 3000K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming
** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.