

## ASSEMBLY INSTRUCTIONS

## Brigitte Grande Chandelier


Item # PCD 5021

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver      Slotted Screwdriver      Wire Cutters  
Wire Strippers

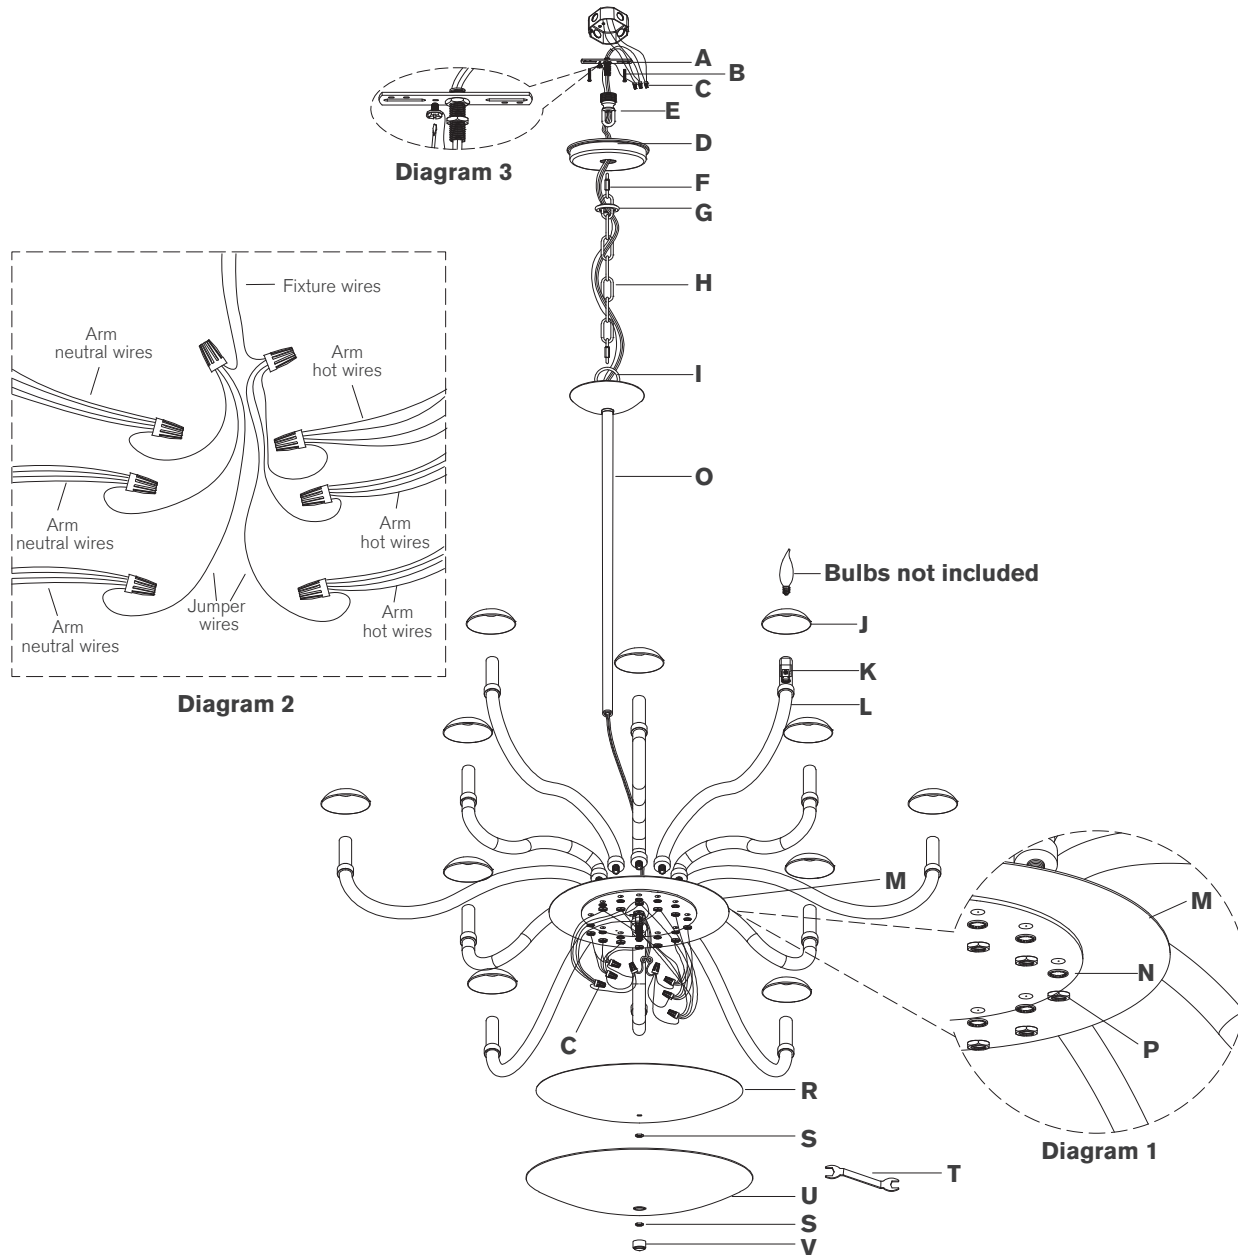

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (**A**) from collar loop (**E**) by unscrewing.
3. Install mounting plate (**A**) to junction box and secure with mounting screws (**B**).
4. Secure collar loop (**E**) to mounting plate (**A**) using pliers to tighten locknut.
5. Install canopy (**D**) to collar loop (**E**) and secure with collar ring (**G**).
6. Thread rod (**O**) to center plate (**M**).
7. Determine desired overall length, and amount of chain (**H**) needed. Shorten chain using chain pliers. (Keep extra chain)
8. Attach chain (**H**) to collar loop (**E**) and fixture loop (**I**) using quick links (**F**). Secure quick links (**F**).
9. Install fixture arms (**L**) to center plate (**M**) and secure with lock washers (**N**) and hex nuts (**P**) using provided wrench (**T**). See diagram 1.  
**NOTE:** Check that the arms are spaced evenly before final tightening.
10. Connect all neutral wires (ribbed) from four (4) of the fixture arms (**L**) with jumper wire (white), then secure with wire nut (**C**). Repeat with remaining eight (8) wires on fixture. See diagram 2.
11. Connect both jumper neutral wires (white) to fixture neutral wire (ribbed) using wire nut (**C**). See diagram 2.


## ASSEMBLY INSTRUCTIONS

## Brigitte Grande Chandelier

Item # PCD 5021

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

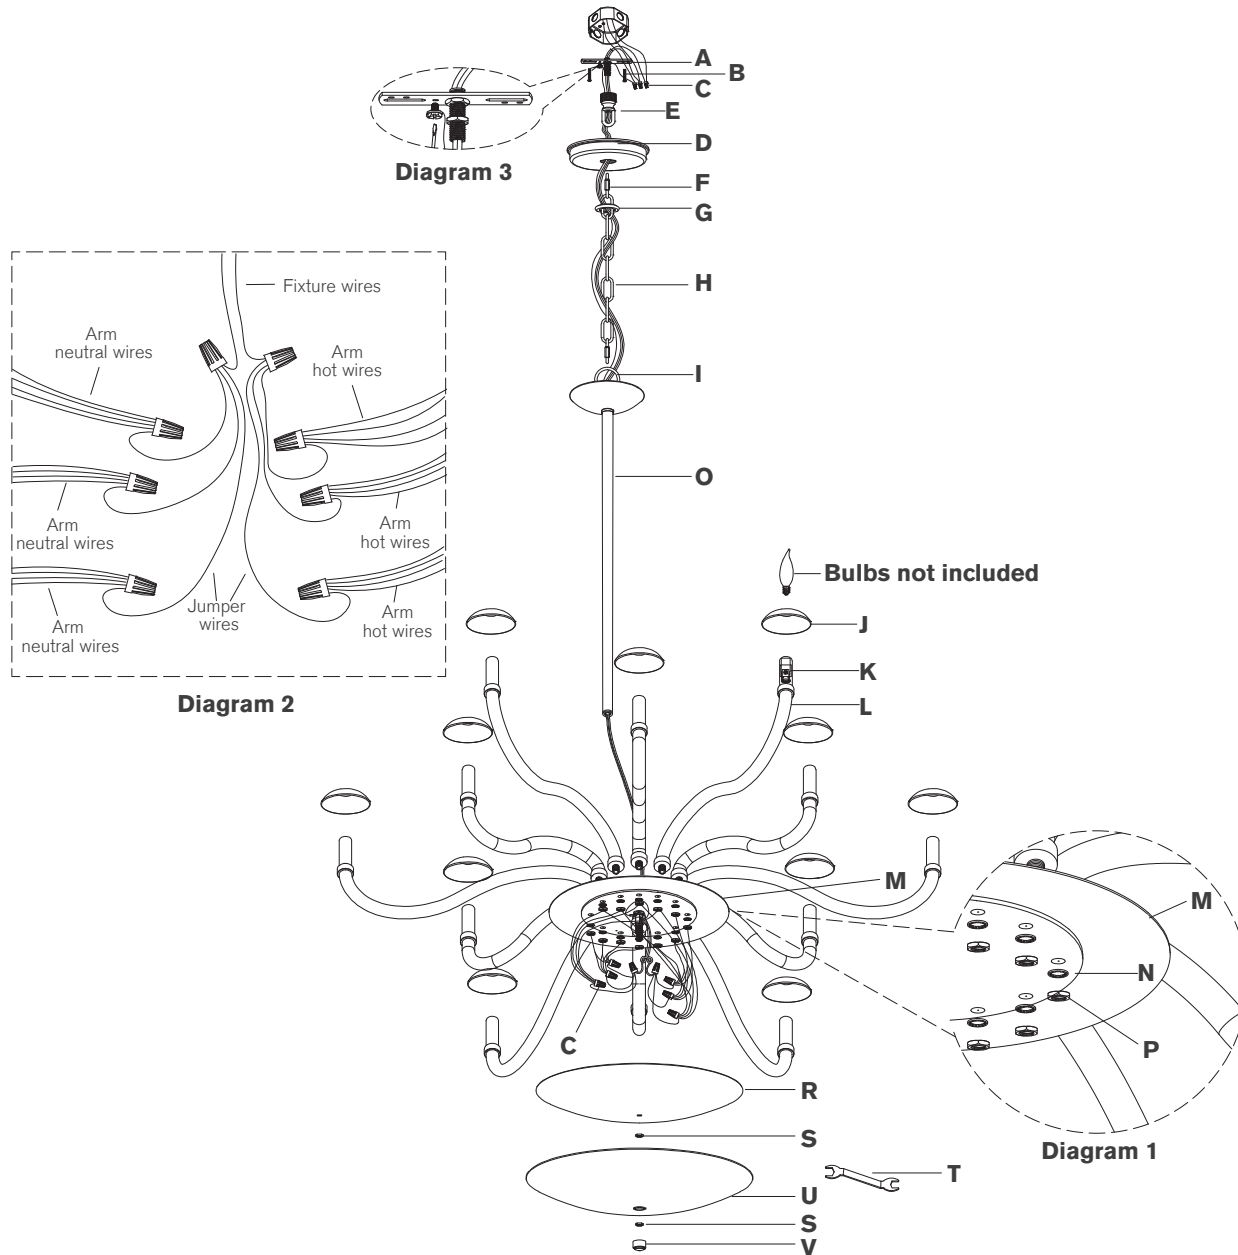

12. Connect all hot wires (smooth with markings) from four (4) of the fixture arms (**L**) with jumper wire (black), then secure with wire nut (**C**). Repeat with remaining eight (8) wires on fixture. See diagram 2.
13. Connect both jumper hot wires (black) to fixture hot wire (smooth with markings) using wire nut (**C**). See diagram 2.
14. Install metal bowl (**R**) to threaded nipple and secure with hex nut (**S**) using provided wrench (**T**).
15. Install glass bowl (**U**) to threaded nipple and secure with hex nut (**S**) using provided wrench (**T**).
16. Thread finial (**V**) to threaded nipple.
17. Thread fixture wire and ground wire through chain (**H**).  
**NOTE:** When you reach the collar loop (**E**), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
18. Separate two sides of molded wire, and strip insulation on each 5/8".
19. Loosen collar ring (**F**) and let canopy (**E**) slip down chain (**H**) carefully.
20. Twist all fixture wires together. Slip through center hole of collar loop (**E**).  
**NOTE:** Untwist wires and separate to prepare for connection.
21. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 3). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**C**).  
**NOTE:** It is imperative that the fixture is grounded.


## ASSEMBLY INSTRUCTIONS

## Brigitte Grande Chandelier

Item # PCD 5021

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

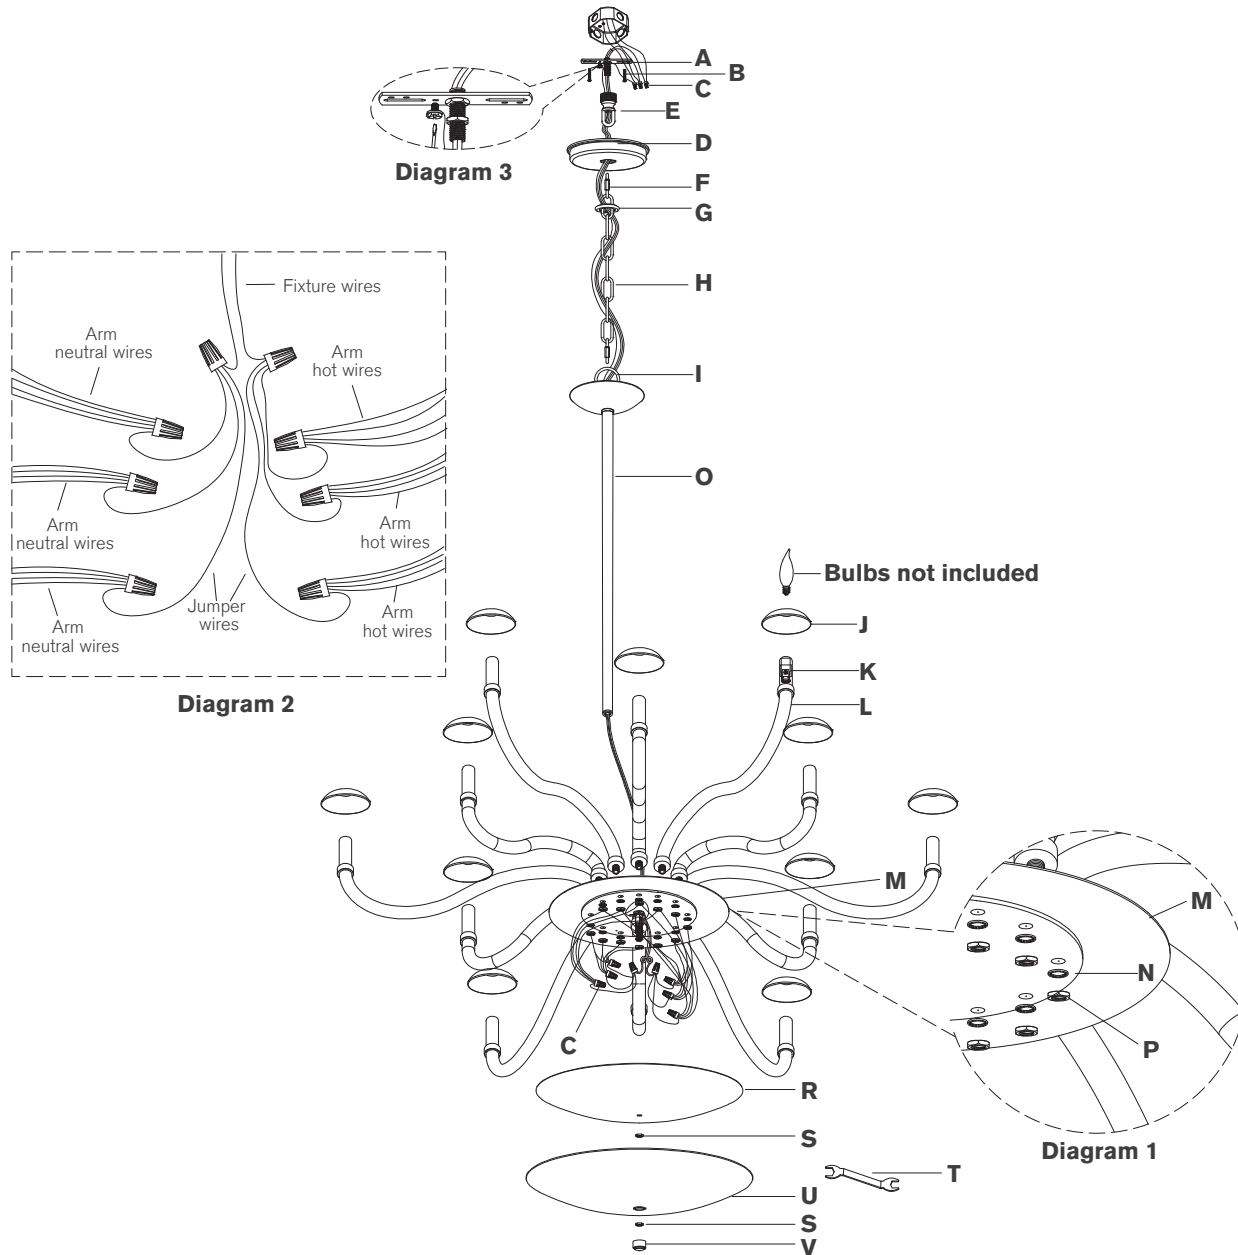

22. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(C)**.
23. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(C)**.
- CAUTION:** Do not reverse the hot and neutral connections.
24. Make sure all wire connections are tight, then carefully tuck into the junction box.
25. Install canopy **(D)** to collar loop **(E)** by securing with collar ring **(G)**.
26. Slip bobeches **(J)** over sockets **(K)**.
27. Install light bulbs into the sockets.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.