


CHC2209

ASSEMBLY & INSTALLATION GUIDE

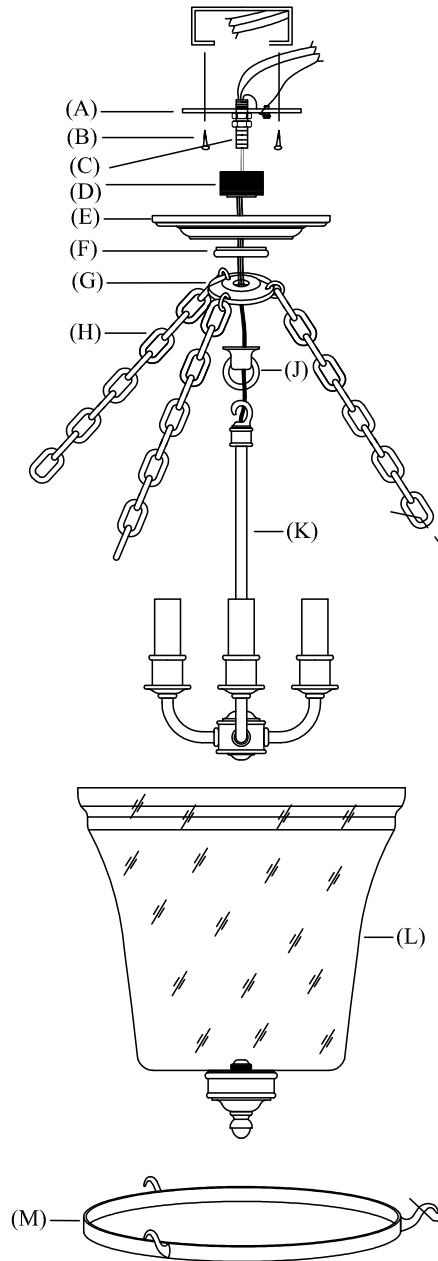

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Unscrewing loop (J) and mounting loop (D) from nipple (C) and unscrewing canopy ring (F) from mounting loop (D).
2. Hook the candelabra assembly (K) to the loop (J) and feed the wire through the center hole of loop (J), plate (G), canopy ring (F), canopy (E), mounting loop (D) and nipple (C).
3. Attach the fixture grounding wire (silver or brass in color) and house grounding wire (usually green or copper) to the mounting strap with the green grounding screw
4. Connect the neutral (RIBBED, without any marking) fixture wire to the neutral (usually white) wire from ceiling outlet box. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. (usually black) outlet wire. Always make sure that no wire strands are left
5. Repeat the procedure with the hot (ROUND, with UL marking on) wire to hot outside of the connections.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
6. Attach mounting strap (A) to ceiling outlet box using mounting screws (B).
7. Thread nipple (C) into the center hole of mounting strap (A). Using pliers, Thread one of hex nut to the mounting strap to secure.
8. Screw mounting loop (D) over nipple (C) and thread another hex nut to the mounting loop (D) to secure.
9. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
10. Slide plate (G) over extruded section of nipple (C), screw loop (J) to (C) to secure plate (G) to mounting loop (D).
11. Insert light bulbs into the sockets.
12. Attach metal ring (M) to glass shade (L), hook the ring to three end links of side chains (H).