

120/277VAC, 600MA (9-23VDC)

Dimmable Remote Power Supply

WAC



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

FINISHES



Black

Model & Product

L x W x H

PS-0600A-UR1

8 7/8" X 2" X 1 1/2"

PRODUCT DESCRIPTION

This class 2, UL & cUL listed enclosed electronic power supply is the perfect solution for wiring low voltage fixtures. Class 2 power supply is intrinsically safer because it is considered safety from a fire initiation standpoint and provides acceptable protection from electric shock. Enclosure cover is easy to remove. Power supply has knockouts for line voltage wiring. Secondary wiring for class 2 power supply do not require conduit sheathed cable or clamp wiring techniques. May be dimmed using phase cut (TRIAC/ELV) or 0-10V dimmer.


FEATURES

- Universal Input 120-277VAC
- ≥ 0.9 pf
- Overload and short circuit protection
- TRIAC/ ELV/0-10V Dimming Control
- 0-10V Dimming curve adjustment
- Class 2 Output
- 5 Year warranty

SPECIFICATIONS

Input:	120-277VAC
Output:	600mA, 9-23VDC
Dimming:	TRIAC/ELV/0-10V: 100-1% 0-10V Minimum Current Source: 25uA 0-10V Maximum Current Sink: 400uA
Rated Life:	50,000 hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed,

LINE DRAWING

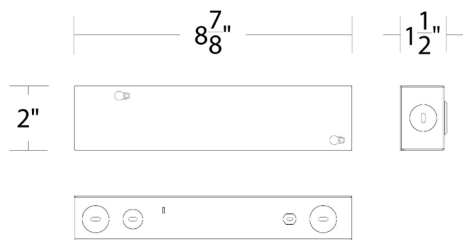

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760