

Tomfaucet


User's Manual



RB1091

INSTALLATION INSTRUCTIONS

Installation Manual

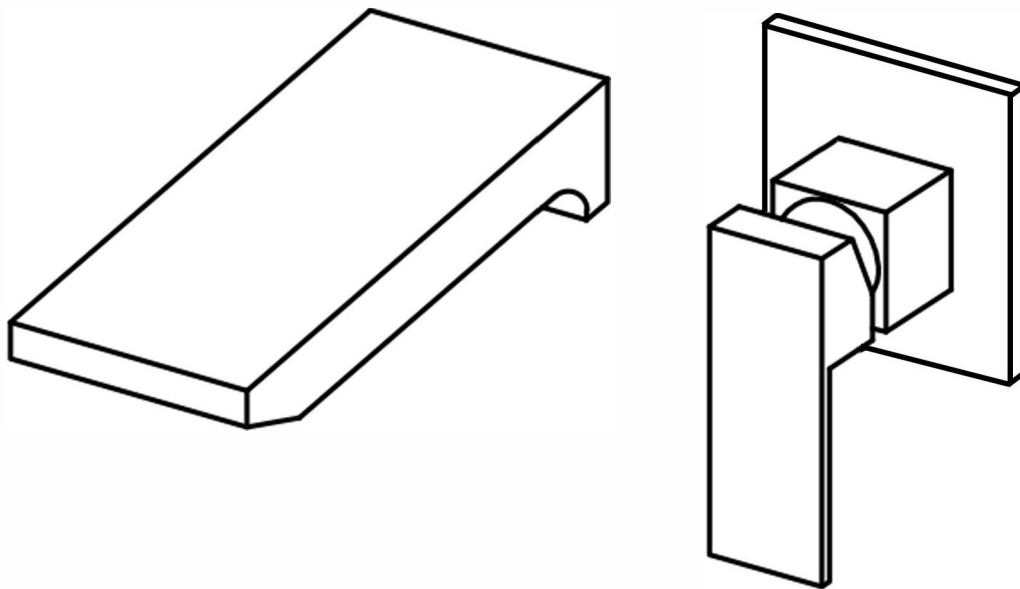

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

Effective Date: August 2013 Void After: August 2014
Product: Plumbing Fixtures Fittings File No. 9737
Issued To: Haising Heats Cartridge Co., Ltd.
No. 21 Haising Road,
Shenzhen Town,
Guangdong City, GUANGDONG
China

Identification: Plumbing supply fixtures complying with this Standard shall be marked with the manufacturer's recognized name, trademark, or other mark on the case of private labeling, the name, trademark or other mark of the customer for whom the fitting was manufactured. The marking shall be accomplished by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Single-handle, single-control, and automatic compensating mixing bath and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "warm", "hot", etc.), by numbers, or graphically.

Valves shall be marked with the manufacturer's name, trademark, or other mark as well as the model number, or, in the case of private labeling, the name, trademark or mark of the customer for whom the fitting was manufactured as well as the model number.

David McHenry
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group

UPC

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

Effective Date: October 2016 Void After: October 2017
Product: Flexible Water Connectors File No. 4500
Issued To: Tuhuan Jianglin Plumbing Hose & Parts Co., Ltd.
Fuzhou County
Fujian 317480,
China

Identification: Manufacturer's name as trademark and UPC certification mark. Special case as listed "The use of this mark is required on all products only."

Characteristics: Flexible water connectors manufactured in various sizes, lengths and metal and fittings for hot or cold water applications that comply with the code, which may or may not have an outer braided cover. Connectors are to be installed for use in accessible locations only and in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance with the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC)

David McHenry
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group

UPC

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • (909) 472-4100 Fax (909) 472-4244 • www.iapmo.org

ANSI **IAPMO R&T** **UPC**

CERTIFICATE OF LISTING

Effective Date: November 2016 Void After: November 2017
Product: Plumbing Fixtures Fittings File No. 9737
Issued To: Haising Heats Cartridge Co., Ltd.
No. 21 Haising Road,
Shenzhen Town,
Guangdong City, GUANGDONG
China

Identification: Each fitting component shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the Standard. The marking shall be located where it can be read after installation is complete. The product or packaging shall also bear the UPC certification mark.

Characteristics: Plumbing fixtures fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance with the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC)
National Plumbing Code of Canada


Tom Colledge
Chairman, Product Certification Committee

Ron Chang
CEO, The IAPMO Group


UPC

BEFORE INSTALLATION

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.




Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.




1. Please read the manual firstly before installation;
2. Please check the condition of all the parts, and the installation tools are not included, please prepare it by yourself;
3. User manual includes matters needing attention during installation, please keep it properly;
4. The size chart in the manual is for reference only, please refer to the actual product that you receive.


Recommend Tools :




PTFE Tape



Hex Key




Slotted Screwdriver



Phillips Screwdriver

INSTALLATION DIMENSION

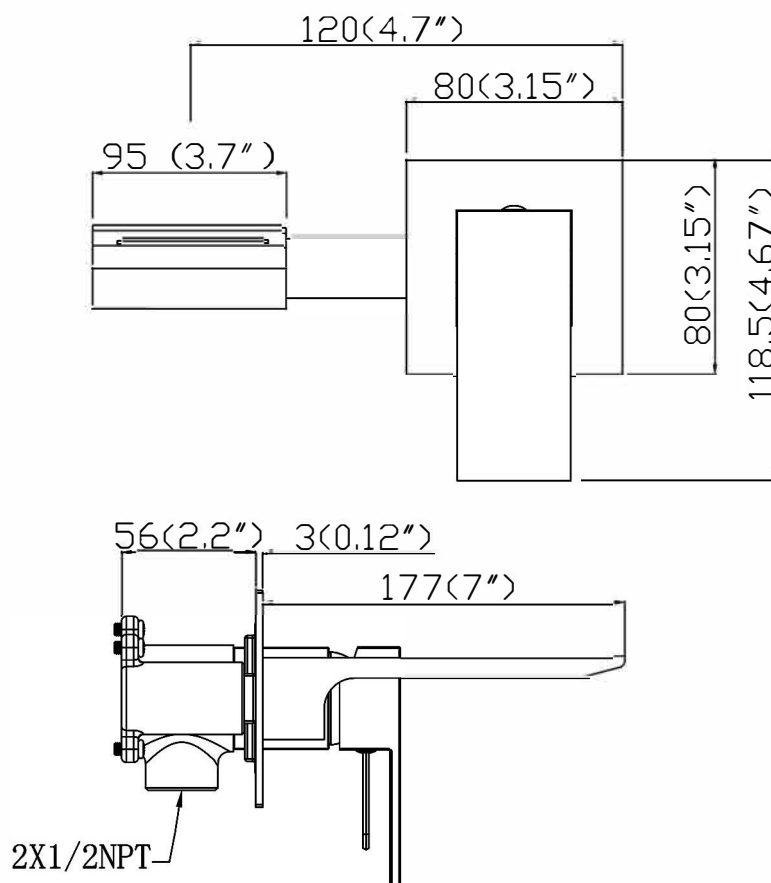


The picture is for reference only, you can install it according to your own requirements.

INSTALLATION STEPS


- 1.The sundries at the connection area must be cleared before installation to avoid blockage or leakage;
- 2.Connect the inlet pipe correctly as shown in the figure;
- 3.The maximum temperature of hot water is not higher than 80 °C (176°F);
- 4.Please contact seller for consultation if you need to install in other method.

①

Mark the location of screw holes on the wall, drill holes and install the water intake body

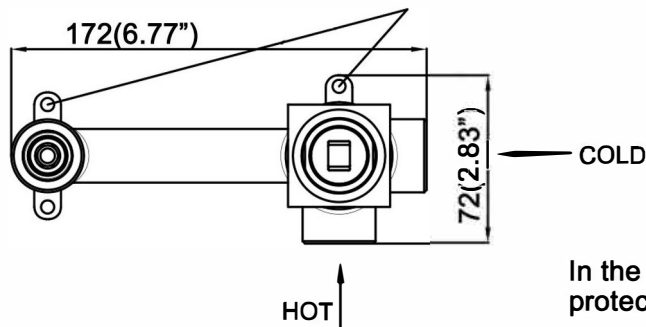


The inner wall is flush with the plane of the main body.

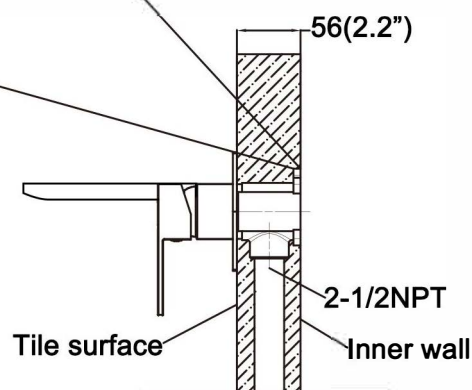

In the process of burying the wall, please do not remove the protective cover and avoid touching the copper sleeve.

②Please install other parts in the order as shown in the figure below when the valve mounted to the wall:

- 1.Remove the protective cover
- 2.Cover the panel
- 3.install the handle and the water outlet connector.

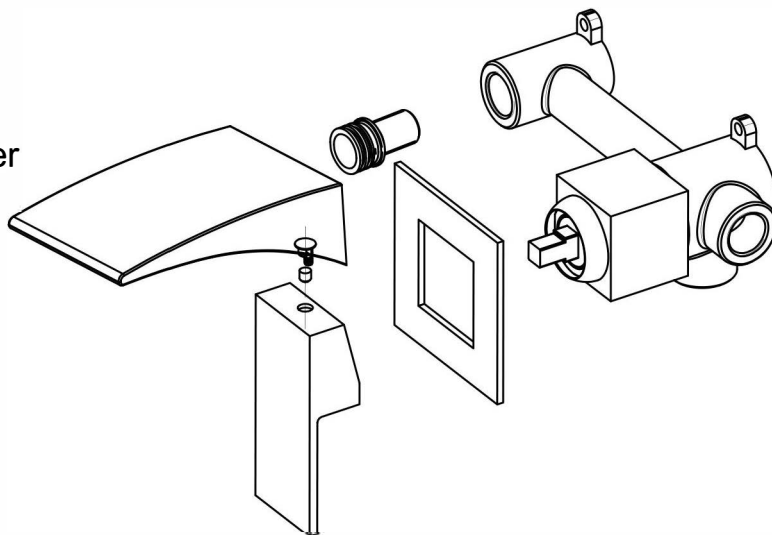

CLEANING CARE

In order to keep the appearance of faucet clean,bright and good performance, please take care of the faucet as follows;

- 1.Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive detergent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner,or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.





Tomfaucet

Match Your Ideal Bathroom & Kitchen

www.tomfaucet.com