

# 2010-2015 Camaro EMP Rear Seat Delete Installation Instructions

Evans Motorsport Performance Rear Seat Deletes are Made in USA From 3/16" ABS Plastic.  
Visit [www.EMP.parts](http://www.EMP.parts) and go to the Camaro Rear Seat Delete page to view installation video.

Tools Needed:  
Phillips Screwdriver  
15mm Socket or Wrench  
18mm Deep Socket or Wrench  
Socket Extension

Hardware Provided:  
2 - #8 1" Screws  
2 - 1/4-20 1" Bolts  
2 - 1/4-20 1" Rubber Well Nuts



Hardware may vary


Perform installation at your own risk. We are not responsible for damage to vehicles or injury to persons during installation and/or use of this seat delete.

1. Place vehicle in park with parking brake on. Double check everything and surroundings to be sure all is safe before starting installation.


2. SEAT REMOVAL: Pull up on seat bottom where shown to detach from car. Repeat for other side.



3. Pull seat material down at middle back of seat bottom and push down on bar that is under the double hook and repeat for other side to fully disengage seat bottom.

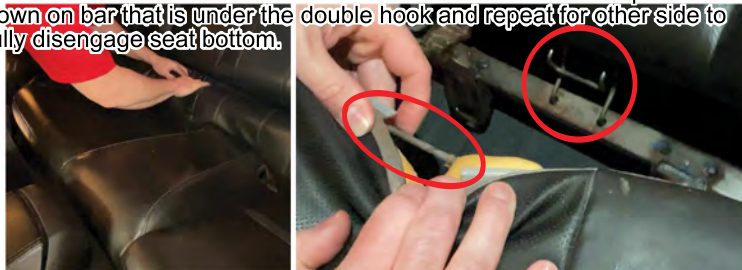

4. With seat bottom removed, now remove the center 18mm nut that holds the seat belt bracket.

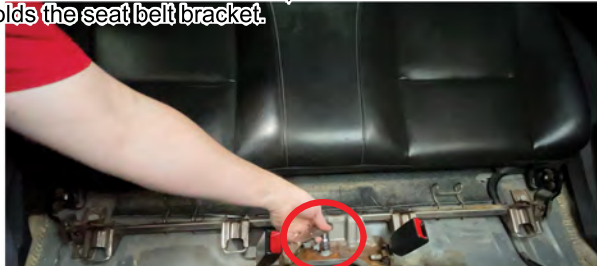

5. Remove the four 15mm bolts holding the seat belt bracket. Socket extension needed.



6. Pull on strap at the top middle of seat back to fully release seat back and remove from the car.



7. Pull out the rubber grommets on both sides where seat back was. Before installing seat delete, areas of car chassis around seat delete edges can be painted flat black for a better look.




8. SEAT DELETE INSTALL: Bring seat delete back section into car first with rectangular slot up.




9. Place rectangular slot over seat back bracket, pull seat belts out of the way and bend seat delete back section out at the sides to get into place.



10. Insert two #8 screws into small holes in seat delete back section. Do not over tighten these screws.

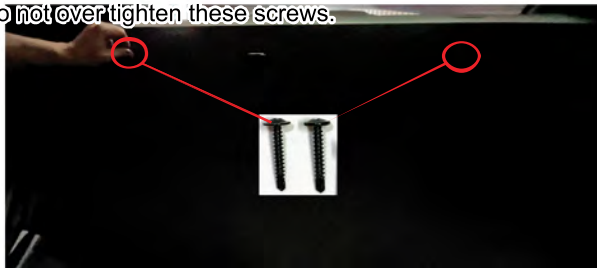

11. Install center seat delete section with notch side down and secure with four 15mm bolts removed from seat belt bracket earlier. Press firmly against car to conform to the curve.

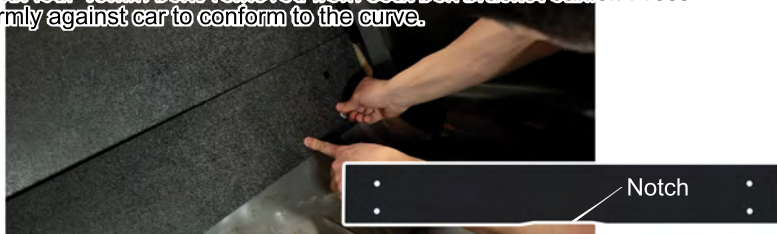


# 2010-2015 Camaro EMP Rear Seat Delete Installation Instructions

12. Bring bottom section of seat delete into car with larger centered hole facing up.



14. Lift seat delete bottom and place rubber well nut into hole next to seat bottom clip. Hold up from underneath with finger.

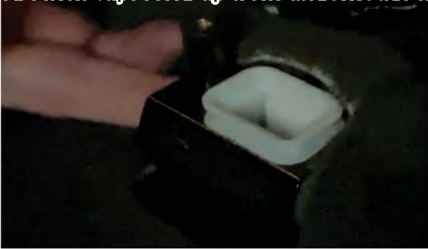

Rubber Well Nut

16. Install 18mm nut onto the center seat belt bracket bolt.



18. Slide plastic flip lock into place in EMP bracket lock slot and twist under seat back bracket to hold seat delete back firmly in place. Can be a tight fit, especially with carpeted seat deletes. Flip lock has curved side that fits round bar of seat back bracket.



Note: Seat delete can hold a substantial amount of weight but the back corners of seat delete bottom may get stuck under seat delete center section and rubber well nuts pushed down. Simply lift the seat delete bottom like shown to put back in place.



13. Place larger hole over center seat belt bracket bolt. Seat belts need to be moved out of the way. Bottom is a tight fit so it holds in place.



15. Lower seat delete bottom onto rubber well nut and insert 1/4-20 bolt through small hole in seat delete bottom then into rubber well nut. Repeat steps 14 and 15 for other side.



1/4-20 Bolt

17. Install EMP bracket lock into top of seat back bracket, push down until it snaps into place.



19. Ensure all hardware is tightened.

Can easily be reversed and seats put back in place. Seat delete can also be vinyl wrapped, or have text or logos engraved or cut out.



Perform installation at your own risk. We are not responsible for damage to parts or vehicles or injury to persons during installation and/or use of this Rear Seat Delete Kit. EMP is not responsible for products beyond initial quality and condition due to conditions, installation quality and other factors beyond our control.

@emp.parts

[www.EMP.parts](http://www.EMP.parts)  
Evans Motorsport Performance