



+AddB!ke

B-Back 2022

AddBike

French company
founded in 2015



Safety



Cleverness



Proximity

We want to make your daily life as a cyclist easier
and safer with clever solutions designed for you.

« I created Addbike with one goal in mind:
to improve cyclists daily lives by
promoting sustainable urban mobility »

-**Renaud**, Founder



B-Back

Need stability?
Start riding again
thanks to our accessory!



“It fits your bike”

“It’s as stable
as a tricycle”

“It turns your
bike into a little
cargo bike”

B-Back

Ride steady and loaded!



B-Back
accessory



Your bike



Tricycle



Stable and
easy to ride



Cost-effective



Fits a lot of bikes



Capacity 35kg / 77lbs

B-Back compatibility

Your bike is compatible with the B-Back if it meets all these requirements



Dutch bike

OU




MTB

OU




Road bike


*Carbon, plastic and bamboo frames and bamboo frames are not recommended.



Rear wheel
26 to 29 Inch

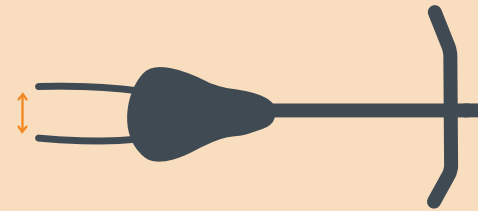

Spacing between the bases
(rear hub) : **135 mm/ 5.3"**

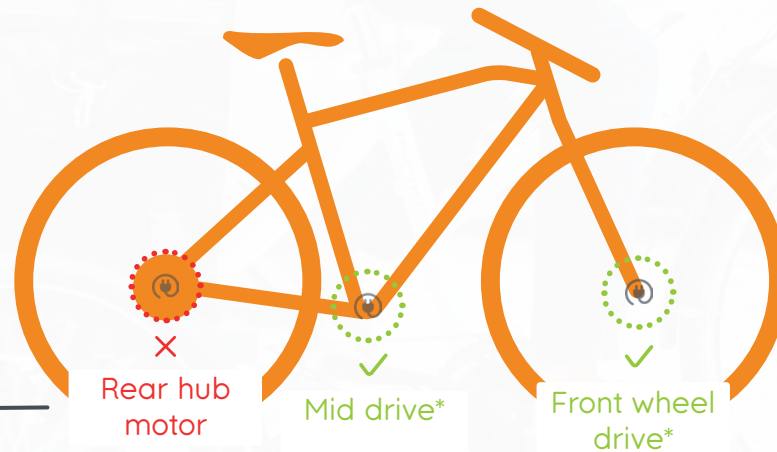

You will no longer have electric drive ←

Rear hub motor


Mid drive*

Front wheel drive*

↓
EAB kit required*


*If the Speed Sensor is built in the bike's frame and is not removable, then the EAB kit is not compatible.
If your motor works without Speed Sensor (but with a torque sensor only for example), no need for a VAE Kit. The B-Back is compatible and you will keep your assistance.

Does your bike have a derailleur hanger?

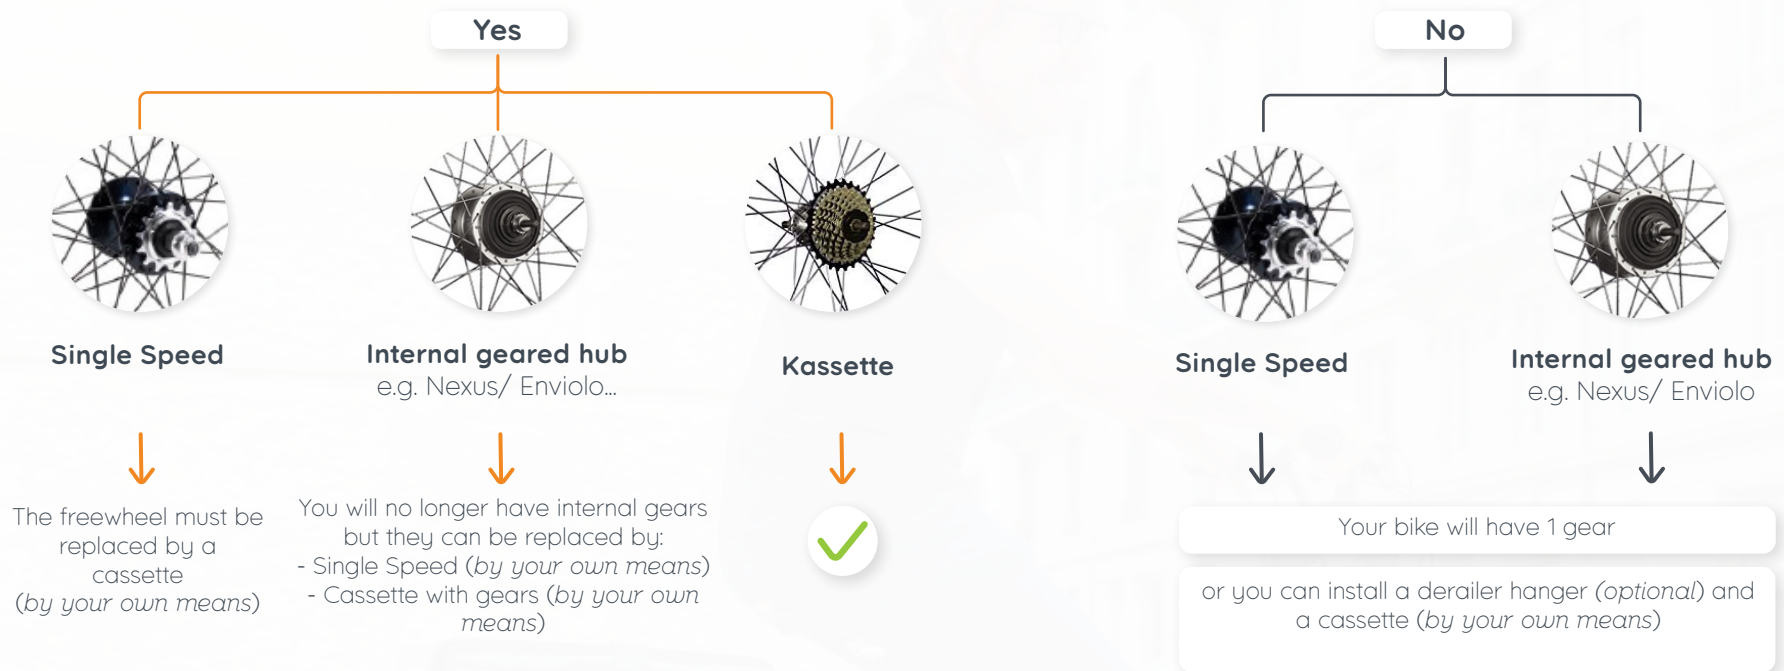

*The freewheel body of our hub is standard Shimano HG (hyperglide) which accepts between 7 and 11 speeds. The largest sprocket shall not exceed 38 teeth.

The rear brake system has


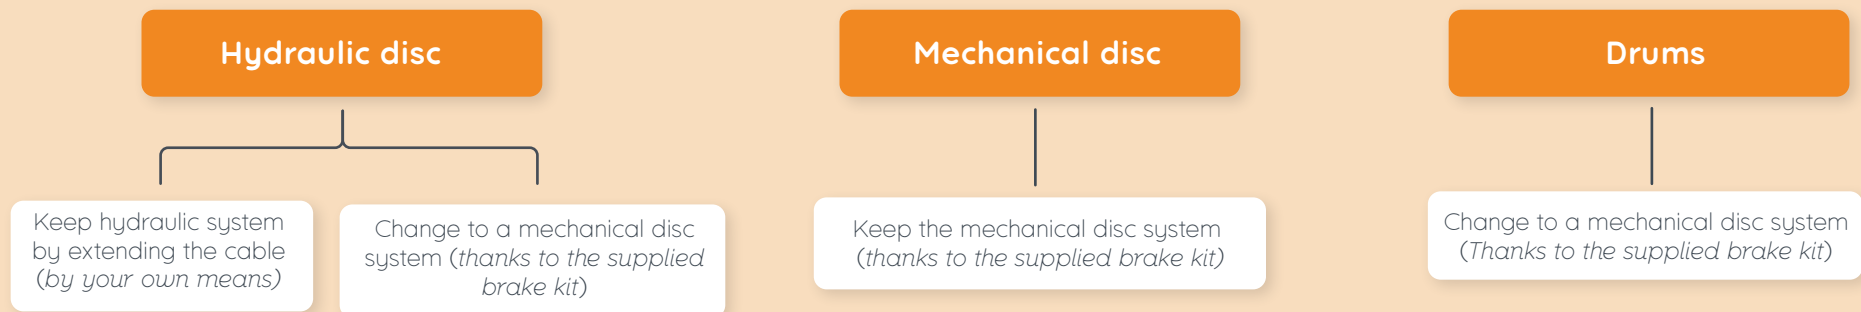


How to know if the B-Back fits to the frame ?

1. In order to confirm the compatibility, please print the entire template on the last page of this document. Then, check the 100mm dimension.


2. Then place the printed template on the hub just like in the image below.

Print the entire template
Check the 100 mm dimensions

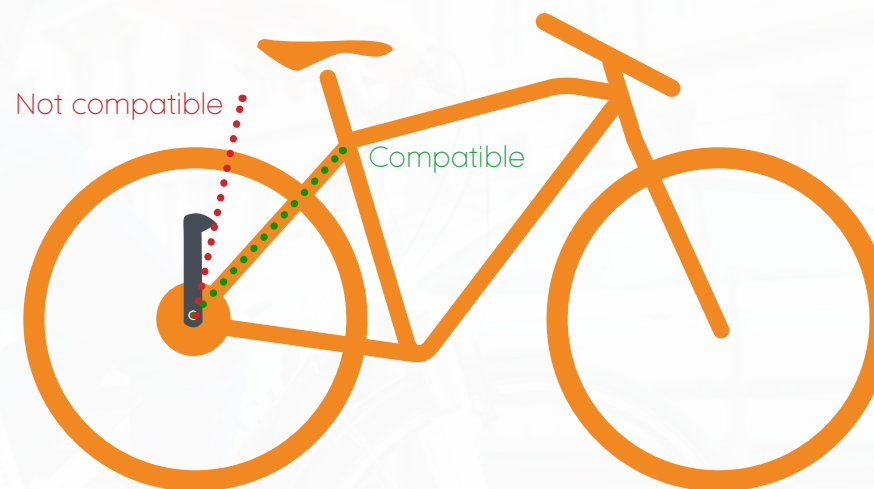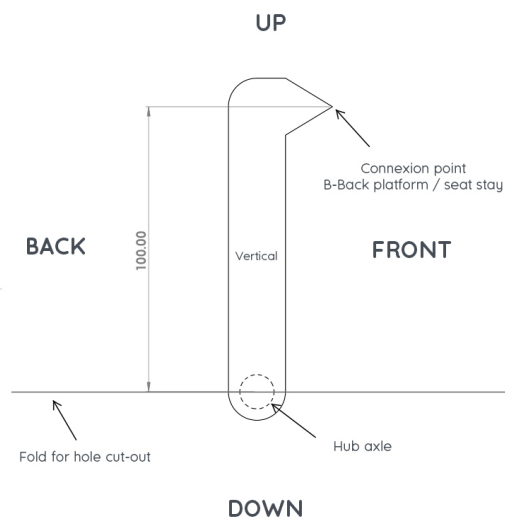

If the hub goes behind the template, then your bike is not compatible.

Where is the bike's battery?

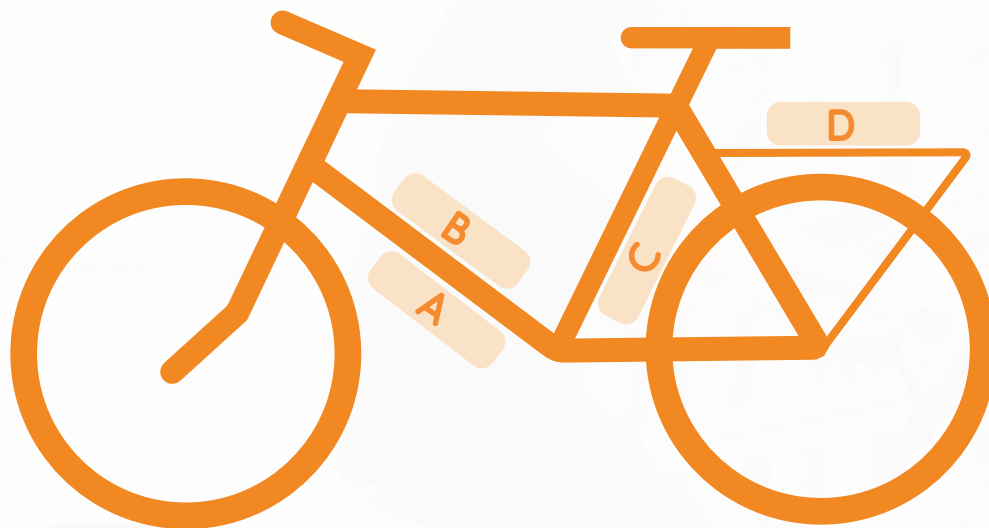

1. If the battery is placed like A. B. C. (cf image above): your bike is compatible
2. If your battery is on the rack, there are two options:

- **The rack cannot be removed:** you can install the B-Back but without the upper platform. It is therefore not compatible with the B-Back Box or B-Back Animal. The battery can stay on the rack.
- **The rack can be removed:** you can install the B-Back. You'll have to take it apart and put it elsewhere.

In any case, contact us directly

 contact@addbike.fr

 +33 4 78 59 98 76

Tailor it to your needs!

Transport what and who you want thanks
to modules that fit the B-Back



Load transport



Load capacity: **62L**



Animal transport



Size L
Animal max. height: **36cm / 14"**
Animal max. length: **56cm / 22"**
Animal max. weight: **35kg**

Fit the B-Back to your bike


**Integrated
brake system***
placed on your
bike handelbars



Quick-Fix Tech
fits to your bike



Add the module you need
to adapt it to your needs

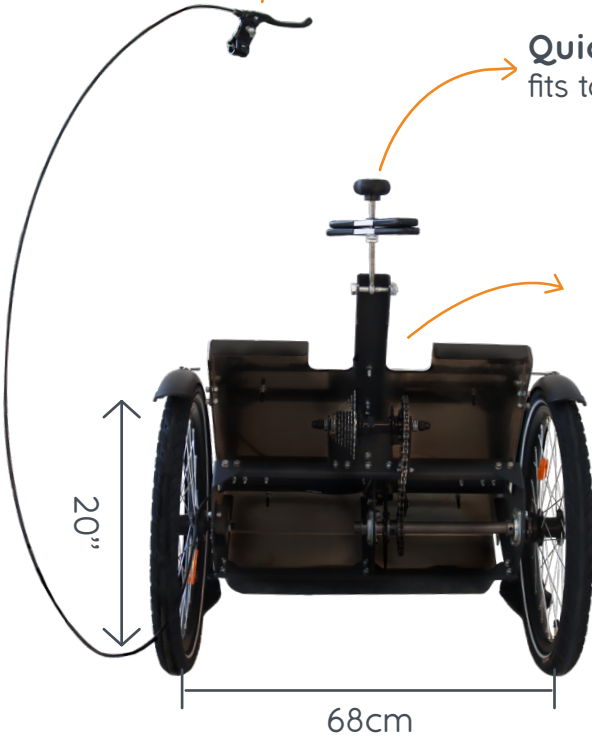

*If you already have a hydraulic brake, you can keep it.
You'll simply have to buy a longer tube.



We strongly recommend it
being professionally fitted


Average installation time: 1h

General informations

Weight & Size	Weight - frame only: 15kg Size (lxWxh) - frame only: 68x68x50 cm / 27"x27"x20"
Load capacity	Capacity of: 35kg / 77lbs max.
Wheels	Wheel size: 20 *1, 75" Kenda k1800 Total width: 63cm Rims and spokes: Mach 1
Brakes	Mechanicals disc brake
Safety component	Reflectors on the back of the mudguards
Materials	Frames and tubes: steel Upper plate: aluminium Colour: black

Any questions?

Contact us

 + 33 4 78 59 98 76

 contact@addbike.fr

 www.add-bike.com

Let's keep in touch

Follow our adventures!

projetaddbike

addbike_officiel

Add_Bike

addbike



AddB!ke

Clever with you

Print the entire template
Check the 100 mm dimensions

