
# 32" Android PCAP Touch Screens



Perfect for interactive experiences, such as wayfinding and product browsing

#### **Ultra Responsive Interactivity**

Optimum sensitivity to touch gestures and rapid response times ensure that users have a smooth, effortless experience. There's no need to touch the same thing multiple times or wait for a touch to register when interacting with these ultraresponsive displays.

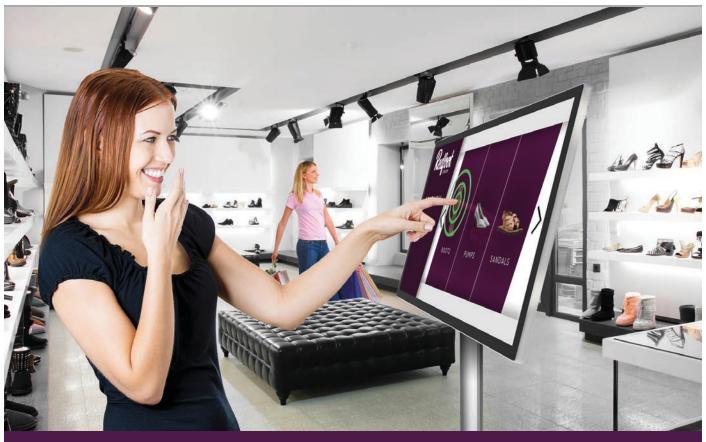

#### **Giant Tablet Styling**

The tempered edge-to-edge glass face, rounded corners, super slim depth, aluminium surround and thin black border give a captivating tablet-like aesthetic. This stylish glass face also increases the durability of the display, protecting the LCD panel and other internal components from potential damage in public spaces.





Concave Indent Profile




#### 24/7 Commercial Use

These displays are able to be in constant use 24/7 for over 70,000 hours thanks to their commercial grade LCD panel, media player and other components. They also have no external buttons or controls to prevent tampering.



#### Surface Plasma Treatment

A special oleophobic coating makes the glass front more resistant to the oily residue left by fingerprints and improves the smoothness of touch gestures. Unlike other touch screens on the market, this glass is not etched, which vastly enhances the optical clarity.

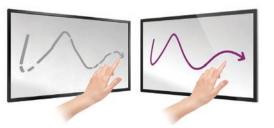

#### 450cd/m<sup>2</sup> IPS Panel

Thanks to the commercial grade IPS technology, these panels are designed to accurately display image quality and colour depth with no fall-off in colour accuracy, as well as achieving ultimate lifelike colour temperature in both landscape and portrait orientations.



#### **Content Management System**

Quickly and easily create your own interactive content by utilising our user-friendly CMS, which can be packaged with the display for a small charge.



#### **10-Point PCAP Touch**

Having up to 10 touch points allows users to perform a variety of touch gestures, including manipulating images and zooming in/out – much like you would with a domestic tablet or smart phone. It also allows multiple users to interact with the screen at the same time.




### Lightweight Design

With a robust but lightweight aluminium enclosure and moulded polymer rear, these displays are over 30% lighter than their predecessor, allowing for easier installation and maintenance.



#### **Touch Screen Monitor**

Connect to an external source, such as a third-party PC or media player, using the built-in USB and HDMI or VGA/3.5mm audio inputs to use the display as touch screen monitor. This increases the versatility of applications that can be run.

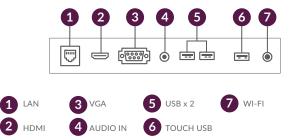


#### Free Wall Mount

A super slim wall mount is included at no extra cost, enabling you to install your screen in either landscape or portrait orientation with a secure and aesthetically-pleasing flush fit to the wall.



### **Key Features**

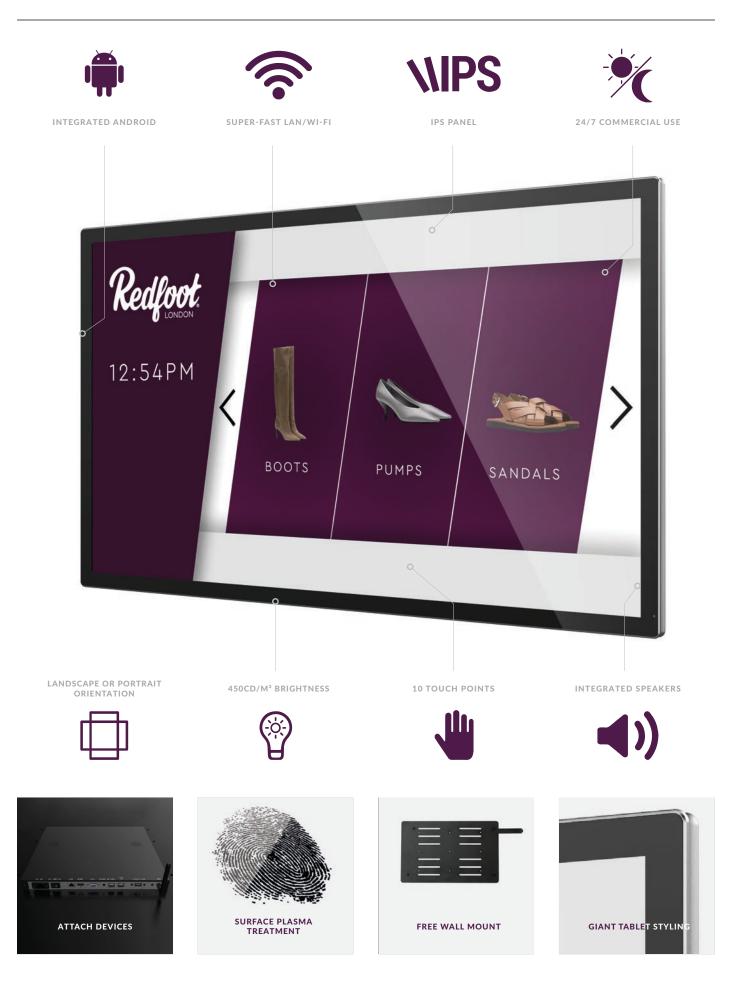


# Specification Table

esolution isplay Area (mm) spect Ratio rightness (cd/m²) olour iewing Angle ontrast Ratio ouch Technology ouch Points lass Hardness peaker Type outh (when used as monitor)	1920x1080 697.4x391.3 16:9 450 16.7M 178° 5,000:1 Projected Capacitive 10 7H minimum
spect Ratio	16:9 450 16.7M 178° 5,000:1 Projected Capacitive 10
rightness (cd/m²) olour olour ontrast Ratio ouch Technology ouch Points lass Hardness ontrast Rype	450 16.7M 178° 5,000:1 Projected Capacitive 10
olour olou olou	16.7M 178° 5,000:1 Projected Capacitive 10
iewing Angle	178° 5,000:1 Projected Capacitive 10
ontrast Ratio obuch Technology obuch Points lass Hardness peaker Type	5,000:1 Projected Capacitive 10
ouch Technology ouch Points lass Hardness peaker Type	Projected Capacitive 10
Duch Points lass Hardness peaker Type	10
lass Hardness	
peaker Type	7H minimum
puts (when used as monitor)	2W, 5Ω (x2)
	HDMI, VGA
udio Input (when used as monitor)	Audio Socket (3.5mm)
ower Consumption (W)	50
nput Voltage	AC110~240V (50Hz~60Hz)
nit Size (WxHxD mm)	757.8x452.3x49.3
ackage Size (WxHxD mm)	868x560.5x165
ESA Holes (mm)	400x200
et Weight (kg)	10.3
ross Weight (kg)	13.2
perating Temperature	0 °C to 50 °C
torage Temperature	-30°C to 60°C
perating Humidity	10% to 80%
torage Humidity	5% to 95%
1edia Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
1edia Resolution	1920x1080/1080x1920
PU	Quad-Core ARM Cortex A17, 1.6GHz
PU	Quad-Core ARM Mali-T764
AM	DDR3 2GB
iternal Storage	8GB eMMC
SB	1 x USB (OTG/HOST), 1 x USB (HOST)
AN	100M/1000M Ethernet
/i-Fi	802.11b/g/n/ac
S	Android 7.1
raphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
ncluded	Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial, Wall Mount
	Floor Stand/Trolley, Ceiling Mount, Table Stand
ptional	3 Year Warranty
ir.	aphic Engine

#### Errors and omissions excepted



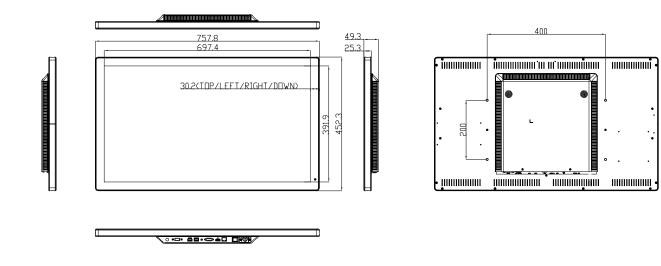

## Why Choose Our Commercial Display Solutions?

