




Power Cord



RS232



RS232 Daisy Chain Cable



IR Sensor Cable



Logo




USB Cover x 1




M4 Screw x 1

* Differences according to regions.




Display design and accessories may differ from those illustrated above.



1

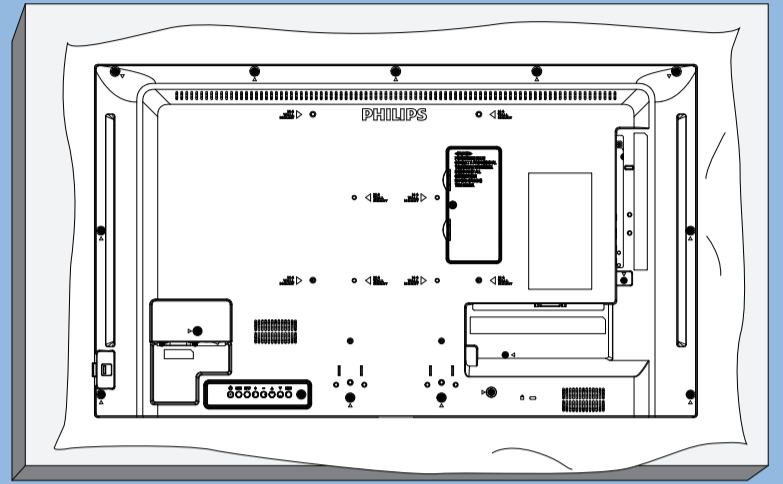

2

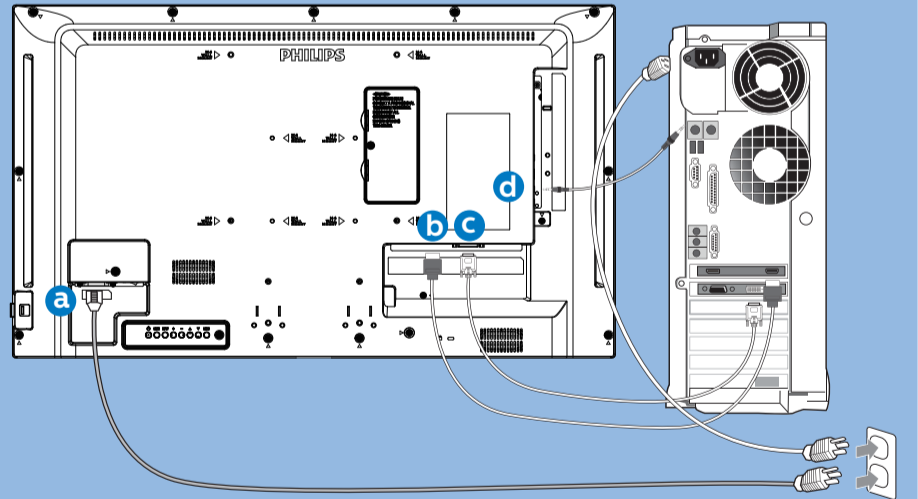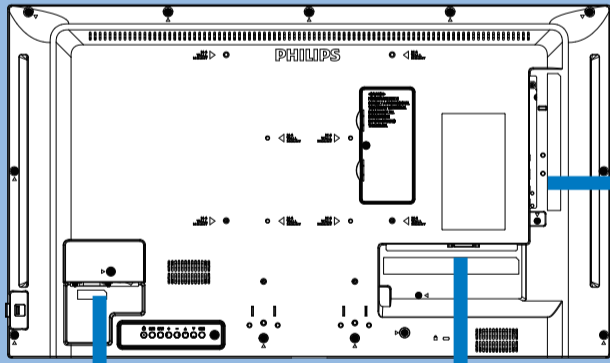

AC IN



HDMI



DVI




AUDIO



HDMI 1 IN HDMI 2 IN



DVI-I IN



RS232 IN RS232 OUT



IR-IN IR-OUT



AUDIO OUT



PC LINE IN



USB Service Port




USB 2.0 5V 500mA



RJ45

3

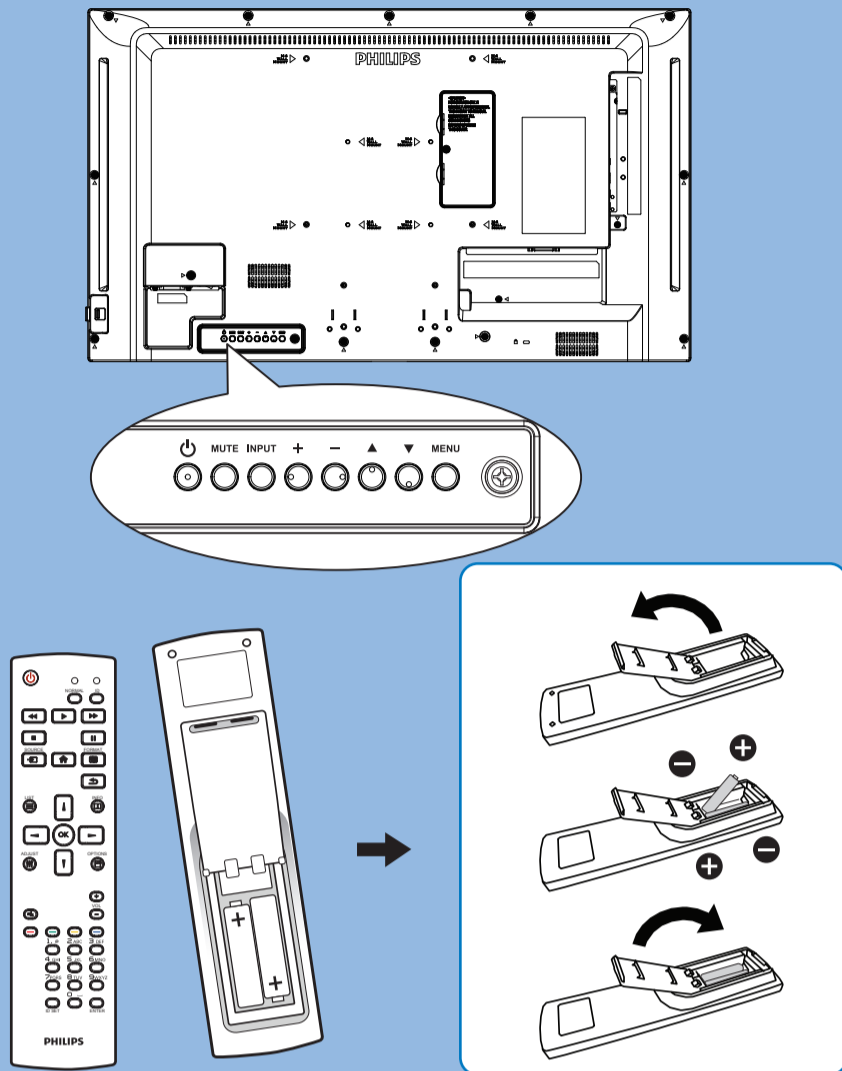

PHILIPS

Professional Display Solutions

Q line

32BDL3510Q





Quick Start



Please check out the website below for more product information.
www.philips.com/signagesolutions-support

4

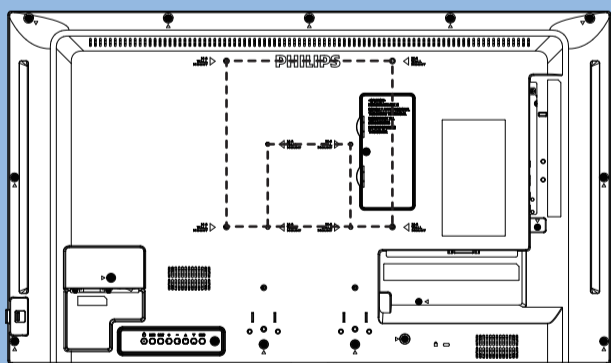

 M4 * (10+X) mm
 (X=Thickness of Wall mount BKT)
 32BDL3510Q: 100mmx100mm
 200mmx200mm



Envision Peripherals Inc.
 490 N McCarthy Blvd, Suite #120
 Milpitas, CA 95035
 USA

© 2020 Koninklijke Philips N.V. All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license from Koninklijke Philips N.V.

Specifications are subject to change without notice.

Version: V1.00 2020-04-20



Q41G32M181372A