




Power Cord



RS232 Cable




RS232 Daisy Chain Cable




IR Sensor Cable




Philips logo plate



AC Switch Cover




USB Cover




Wire Clamper
X 3

* Differences according to regions.



Display design and accessories may differ from those illustrated above.





1

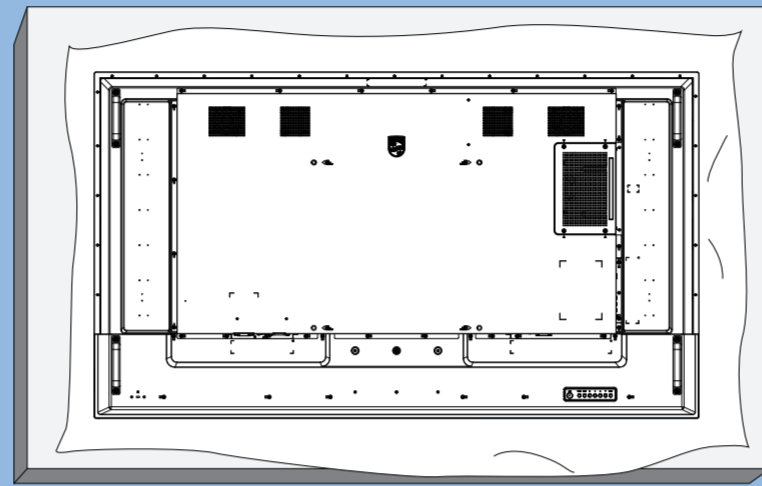

2

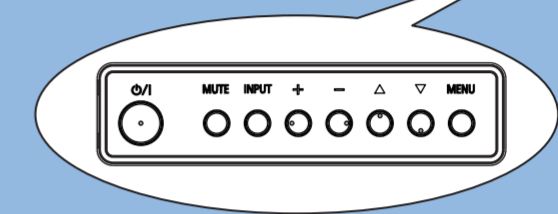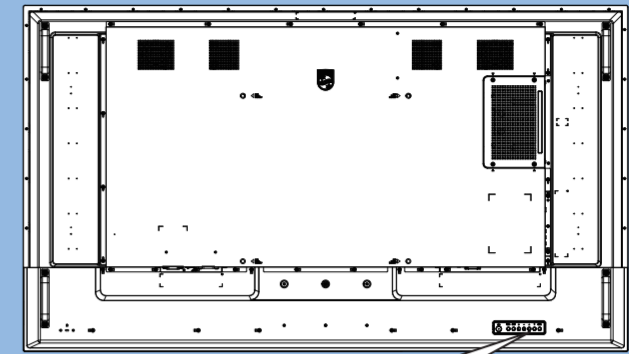

3

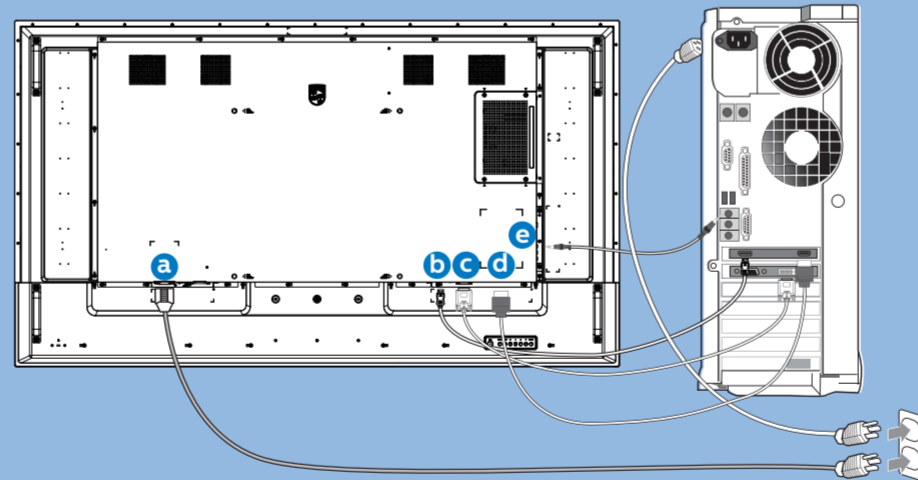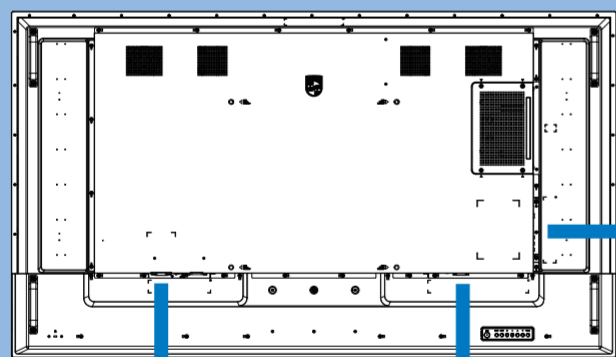

AC IN



DP



DVI




HDMI





AUDIO

4

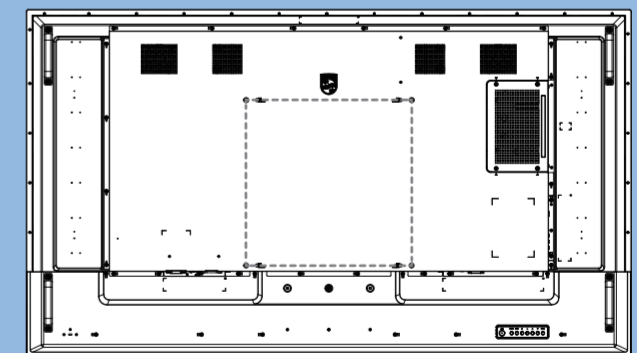


M8 * (15+X) mm
(X=Thickness of Wall mount BKT)



65BDL3017P: 400mmx400mm

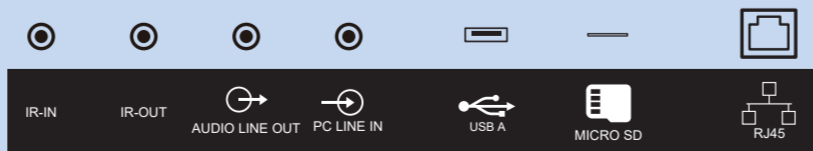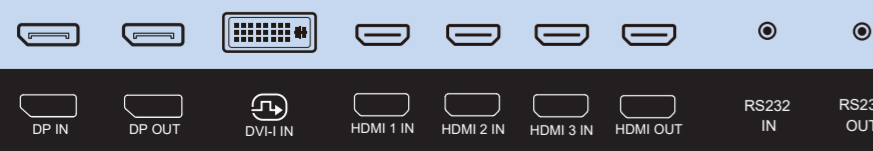

5

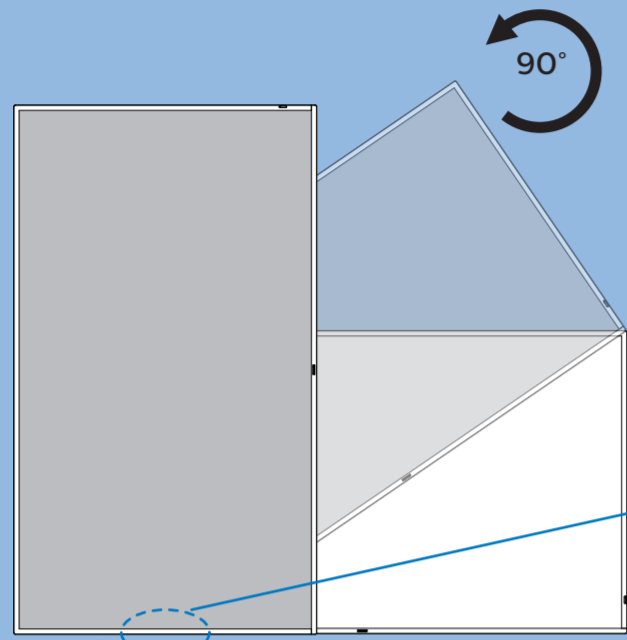

90°

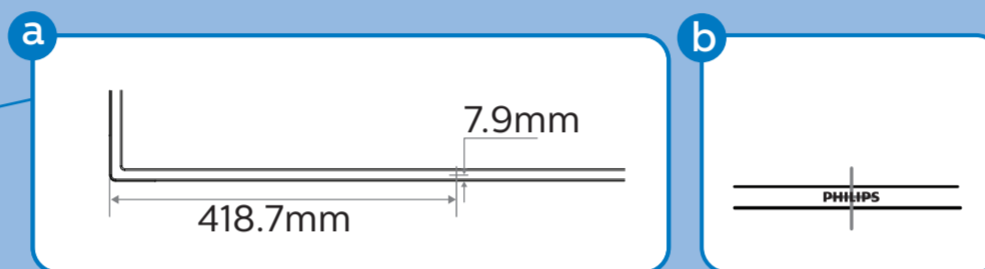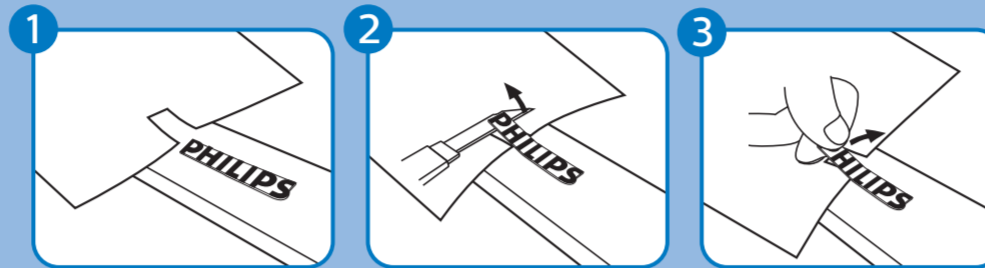


PHILIPS

Professional Display Solutions

P Line

65BDL3017P

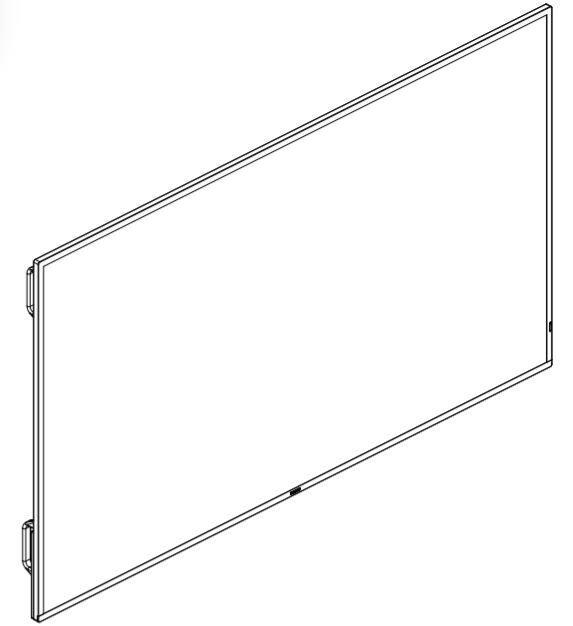

Quick Start



Please check out the website below for more product information.
www.philips.com/signagesolutions-support



Envision Peripherals Inc.
490 N McCarthy Blvd, Suite #120
Milpitas, CA 95035
USA

2021 © TOP Victory Investments Ltd. All rights reserved.
This product has been manufactured by and is sold under the responsibility of Top Victory Investments Ltd., and Top Victory Investments Ltd. is the warrantor in relation to this product. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license.

Specifications are subject to change without notice.

Version: V1.01 2021-02-01

