Hisense



75WR6CE 75" ADVANCED INTERACTIVE DISPLAY

Our WR series of Hisense Interactive Digital Display include the latest smart features to improve collaboration and create a leading engaging experience for users. The new WR series is available in 3 sizes (65", 75", 86") and their 4K Ultra HD picture quality ensures perfect colour and rich detail. They are touch enabled allowing multiple people to use them at once to present, illustrate and share information. When using the digital whiteboard, our improved IR software now recognises touch points as little as 2mm ensuring the experience is as accurate as writing with pen and paper. New for 2022, the WR range features an optical bonded display that diffuses reflections and bright light to keep the display visible in any lighting conditions. Users can also now wirelessly connect with two or more additional Hisense displays.

Highlights



4K Ultra HD

The 4K Ultra HD picture quality ensures perfect colour and rich details in all possible surroundings. In addition to the 4K screen as always, we bring 4K UI for WR6CE. With 4K UI, we can make the most of this clear, bright, eye-protective screen for a more beautiful display.



Anti-Glare

Optical technology diffuses mirror-like reflections and bright lights to help keep what's on your screen clear and visible.



Comfortable viewing

Low blue light and full frequency DC dimming from hardware, bring the ultimate comfort viewing experience.



Settings menu lock

Now you can set a separate password lock for the settings menu to prevent children from accidentally touching it.



Screen transmission

The WR6CE interactive digital board can wirelessly connect with two or more auxiliary screen devices. Near-Field Communication (NFC) touch transmission and A&C screen transmission simplify this process.



Wide viewing angle

The extra wide 178° viewing angle is a perfect fit for classrooms and presentations, with perfect colour and rich details in all possible surroundings.



Collaborative interaction


The touchscreen recognizes up to 20 touches at once which is ideal for simultaneous use by meeting participants.



Newly upgraded whiteboard

Add sticky note function to jot down your thoughts. You can view all the pages through the page list, adjust the page order, and copy content across pages.







Hisense

Specifications

Interactive Display Panel

LCD Size	75″
Backlight Type	D-LED
Resolution	3840x2160(pixels)
Brightness	350cd/m²(typ.)
Contrast Ratio	1200:1(typ.)
Response Time	8ms (typ.)
Refreshing Frequency	60Hz
Viewing Angle	178°(H) / 178°(V)
Lifetime	50,000 hrs (min.)
Color Gamut(X% NTSC)	72%
Display Colors	1.07B(10bit)

System

OS	Android 8.0
Language	Chinese, English, Polish, German, French, Italian, Spanish, Finnish, Norwegian, Swedish, Thai, Indonesian, Japanese
RAM	4GB
ROM	32GB

2x15W

Speaker

Audio	Output Power	

Windows 10/8/7,Android


Connectivity

WI-FI	IEEE 802.11a/b/g/n/ac/ax(2.4G and 5G) IEEE 802.11a/b/g/n/ac(2.4G and 5G)
Bluetooth	BT5.1
Input	HDMI(2.0) IN x 2 DP(1.2a) IN x 1 OPS(optional) x 1 LAN x 1 USB3.0 x 2 Type-C x 1 Touch x 1 RS232 IN x 1 Service x 1
Output	HDMI(2.0) OUT x 1 S/PDIF OUT x 1 Audio OUT x 1
Touch	
Sensing Type	Infrared Touch Frame
Surface Protection	Anti-Glare Glass
Infrared Touch	≤20 points
Touch Accuracy	90%(±1mm)
Theory Clicks	Unlimited
Minimum Touch Object	≥2mm

Power	
Power Requirements	AC 100 V ~ 240 V, 50/60 Hz
Power Consumption Without OPS	260W
Standby Consumption	<0.5W
Physical	
Housing Color	Black
Product Size (W x H x D)	1710 × 1014 × 100mm 67.3 x 39.9 x 3.9 inch
Package Size (W x H x D)	1896 × 1184 x 300mm 74.6 x 46.6 x 11.8 inch
Net Weight	45.8kg / 100.99lb
Packed Weight	61.5kg / 135.61lbs
VESA	600x600mm, 4-M8 screw
What's in the box	

Basic	User Manual × 1
	Pen × 2
	Remote Control × 1
	Wireless Cast × 1 (Optional)
	Power Cable × 1
	Battery × 2
	Wall Mount Bracket × 1

Dimensions

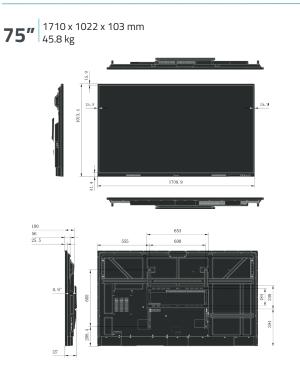

Hisense COMMERCIAL DISPLAY

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

Multi Touch