



### 55" Interactive 4K UHD Touchscreen elevating interactive collaboration

The TE5512MIS-B3AG is an exceptional 4K UHD interactive display designed by iiyama to enhance collaboration, communication, and engagement. With key features like Zero Airgap LCD screen eliminating parallax, accurate PureTouch-IR, iiWare 10 with Android 11, Wifi, and the iiyama DMS (Device management System), this display transforms the way you engage with content, making it an indispensable tool for modern workspaces and educational settings.

Boasting a new 4K Interface with User Profiles for simple login and access to your very own bespoke application and Cloud Drives or harmonize with your existing estate and unleash the true power of Windows and Office applications. iiyama TE5512MIS-B3AG becomes a highly personalised & flexible device within a busy hybrid environment for multiple users.

Share wirelessly more easily than ever before with iiyama Share and [EShare](#) app, bringing effortless ideation and efficient collaboration in your enterprise or school. This affordable display transforms the modern workplaces, educational institutions, dynamic meeting spaces and beyond. Elevate your interactive experience with the iiyama TE12 SERIES displays and embrace the future of visual communication.



PureTouch-IR

PureTouch-IR from iiyama delivers 1mm touch accuracy for the smoothest and fastest annotation.



iiWare

iiWare 10 features Note, Browser, Cloud Drive and the option for you to sideload relevant apps you require for your organisation.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	Thin bezel
<b>Diagonal</b>	55", 138.8cm
<b>Panel</b>	IPS
<b>Touch Glass</b>	AG coated glass, zero air-gap
<b>Native resolution</b>	3840 x 2160 (8.3 megapixel 4K UHD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	400 cd/m <sup>2</sup>
<b>Light transmittance</b>	92%
<b>Static contrast</b>	1200:1
<b>Dynamic contrast</b>	4000:1
<b>Response time (GTG)</b>	8ms
<b>Viewing zone</b>	horizontal/vertical: horizontal°/vertical 178°, right/left: 0°/0°, up/down: 0°/0°
<b>Colour support</b>	1.07B 8bit+FRC
<b>Horizontal Sync</b>	30 - 135kHz
<b>Viewable area W x H</b>	1210 x 680mm, 47.6 x 26.8"
<b>Bezel width (sides, top, bottom)</b>	19mm, 19mm, 46mm
<b>Pixel pitch</b>	0.315mm
<b>Bezel colour and finish</b>	black, matte

## 02 TOUCH

<b>Touch technology</b>	PureTouch-IR
<b>Touch points</b>	40, 5pt writing (HID, only with supported OS)
<b>Touch accuracy</b>	+/- 1.5mm
<b>Touch method</b>	stylus, finger, glove
<b>Touch interface</b>	USB
<b>Supported operating systems</b>	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

## 03 INTERFACES / CONNECTORS / CONTROLS

<b>Analog signal input</b>	VGA x1 (max. 1920x1080 @60Hz)
<b>Digital signal input</b>	HDMI x3 (2.0, max. 3840x2160 @60Hz, YUV444) USB-C x1 (v.3.2 (Gen 1, 5Gbit), 3840x2160 @60Hz - RGB444 - (65W charging, Touch))
<b>Audio input</b>	Mini jack x1
<b>Monitor control input</b>	RS-232c x1 (DSUB 9pin) RJ45 (LAN) x1 (LAN Control) IR x1
<b>Digital signal output</b>	HDMI x1 (3840x2160 @60Hz)
<b>Audio output</b>	S/PDIF (Optical) x1 Mini jack x1 Speakers 2 x 16W (Front)
<b>HDCP</b>	HDMI 1: 2.1, USB-C: 2.2
<b>USB ports</b>	x5 (media playback / peripherals / storage – front side: 2x v.3.2 (Gen 1, 5Gbit), 1x USB-C v.3.2 (Gen 1, 5Gbit, 65W PD), right side: 2x v.3.2 (Gen 1, 5Gbit))
<b>RJ45 (LAN)</b>	x2 (Auto switch for PC & Android, 1000MB)

## 04 FEATURES

<b>Integrated software</b>	iiWare 10 (Android 11 OS) featuring iiyama DMS, Note, web browser, file manager, cloud drives, WPS office, iiyama Share and EShare for wireless connection with Windows/iOS/Android devices
<b>WiFi</b>	yes (WiFi 6 Module OWM002 - Dual WiFi Bandwidth: 2.4GHz/5GHz, WiFi Standard: IEEE 802.11 a/b/g/n/ac, Bluetooth Support: 2.1/3.0/4.2/5.0)
<b>Hardware</b>	Quad core A55 CPU, Mali G52 GPU, 8GB RAM, 64GB internal memory
<b>Extra</b>	WiFi 6 Module (OWM002), Slot for optional OPS Slot PC, 4x Touch pen
<b>Kiosk mode</b>	yes
<b>Max. non-stop operating time</b>	24/7
<b>Media playback</b>	yes
<b>Glass thickness</b>	3mm
<b>Glass hardness</b>	7H
<b>Housing (bezel)</b>	metal
<b>OSD key lock</b>	yes

## 05 GENERAL

<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, CZ, NL, PL, SV, FI, DA, NB
<b>Control buttons</b>	Power, Power Indicator, Remote Sensor, Light Sensor
<b>User controls</b>	general settings (input, volume, backlight), audio settings (volume, bass, treble, balance, sound mode, mute), screen settings (aspect ratio, pixel shift), display settings (brightness, contrast, hue, sharpness, display mode, colour temp.), adjust settings (H-position, V-position, clock, phase, auto), settings (wireless & networks, personal, input & output, application, system)
<b>Blue light reducer</b>	yes
<b>Plug&amp;Play</b>	DDC2B
<b>Warranty</b>	5 years (for details and eligible countries please check the Warranty section of our website)

## 06 MECHANICAL

<b>Orientation</b>	landscape
<b>Fanless design</b>	yes
<b>VESA mounting</b>	400 x 200mm
<b>Operation temperature range</b>	0°C - 40°C
<b>Storage temperature range</b>	- 20°C - %2°C
<b>MTBF</b>	50.000 hours (excluding backlight)

## 07 ACCESSORIES INCLUDED

<b>Cables</b>	power, USB, HDMI
<b>Touch pen</b>	x4
<b>Guides</b>	quick start guide, safety guide
<b>Other</b>	WiFi 6Module (OWM002), Mounting bracket for NUC, Mounting bracket for webcam
<b>Remote control</b>	yes (batteries included)

## 08 POWER MANAGEMENT

<b>Power supply unit</b>	internal
--------------------------	----------


Power supply	AC AC - 100V, 240/V, 50Hz
Power usage	111W typical, 0.5W stand by, 0.3W off mode

## 09 SUSTAINABILITY

Regulations	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH, ES EPA 8.0
REACH SVHC	above 0.1%: Lead

## 10 DIMENSIONS / WEIGHT

Product dimensions W x H x D	1271 x 774 x 87mm
Box dimensions W x H x D	1401 x 859 x 220mm
Weight (without box)	26.1kg
Weight (with box)	34.5kg
EAN code	4948570123681

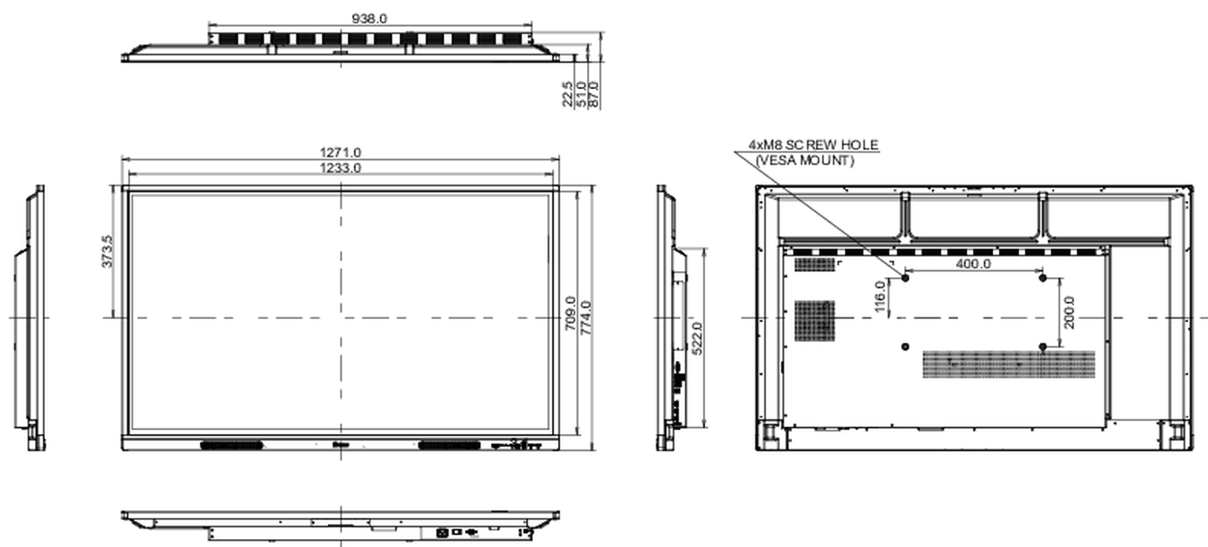

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED