Product guide 2023



- Portable
- Meeting room
- Agile/collaboration space (short throw)
- Agile/collaboration space
- Interactive agile/collaboration space
- Lighting & Signage
- Installation
- Home



Adding collaboration and connectivity to meeting spaces

In business, productivity and efficiency are the keys to success. Epson's display solutions redefine corporate presenting, ensuring efficient and productive meetings in any working environment.

The choice is clear

The right display size for your room maximises audience engagement. Unlike fixed flat panel displays, Epson's scalable solutions project incredible quality displays up to 500", in multiple aspect ratios. You can also connect multiple projectors to create one large seamless image. And with our more mobile projectors, you are not restricted to one room, one venue, one setting.





Hassle-free connectivity

Epson display solutions have comprehensive support and connectivity to match any set up or situation. Our dedicated apps and software are extremely versatile and make it easy for people to make contributions from their own devices.



Unrestricted viewing

A relaxed viewing environment helps the audience concentrate on the information presented. Epson display solutions are less pixelated and avoid the glare, blind spots and fingerprints associated with flat panels. They can be viewed without obstruction, from anywhere in the room.



Eliminate maintenance cycles

Epson's fit-and-forget display solutions combine performance with reliability, meaning lower costs, longer life cycles and impressive warranties of up to five years. You can count on up to 17,000 hours life for lamps and up to 30,000 hours for laser light sources³.



Outstanding quality

Project vivid, engaging images in high resolution, even in brightly lit rooms, with Epson 3LCD technology. The 3LCD panel optical engine at the heart of every Epson projector combines high resolution and high contrast ratios that deliver rich colours and brightness up to three times that of 1-chip DLP projectors².



Make the sustainable choice

Unlike flat panels, many Epson business projectors are TCO Certified⁴, meeting the world's most comprehensive sustainability certification for IT products. To achieve that, we set the highest standards in our supply chains and factories. This helps your organisation to meet your own social responsibility goals.



Leading the way in visual technology excellence

Your success in the world of visual communications means having the freedom to project brighter, bolder, more creative images in every environment. That's why we work so hard to develop innovative, versatile solutions that take projected visuals to new dimensions.

Exceptional quality


Every Epson projector is the result of our commitment to research and development. We manufacture with superb image quality, ease of operation and total reliability in mind. Our solutions combine high brightness, improved texture and exceptional sharpness to produce powerful, vivid images that can cut through high levels of ambient light, even in large spaces.


Cutting-edge technology

Our projectors add flexibility, quality and creativity in almost every setting. Versatile set-up and connectivity, including 360° installation and easy networking, make great projection simple. Our 3LCD technology produces images up to three times brighter than conventional 1-chip DLP projectors². We have created the world's first 30,000 lumen 3LCD laser projector, the EB-L30000U, using the inorganic light engine in our laser projectors.

A wide range of lenses

Choose from extensive lens options with the power and flexibility to enhance any subject. They include motorised adjustment, memory function and the ultra-short-throw, zero offset lens that projects a 200-inch image from just 1.5m.

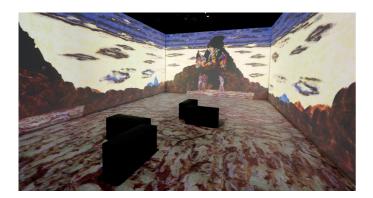

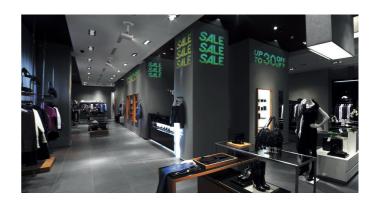

Comprehensive support

As well as building robust products that last, we offer a range of service and support options for our projectors that free you to concentrate on being creative for your customers and audiences. From pre-sales advice to ongoing assistance and access to our experts, our standard and CoverPlus 365 warranties give you extensive ongoing backup that works whenever you need it.

Exceeding audience demands

Modern audiences have high expectations, so expand your creativity at big events and attractions with features including portrait projections and split-screens, 360° installation and projection onto floors, ceilings, corners and curved surfaces. From education and art galleries to digital signage and corporate events, from in-house projector fleets to the rental market, Epson projectors are the smart, effective solution.

Easy maintenance

Dramatically reduce running costs with our highly reliable, heat-resistant projectors. Epson installation projectors are built with long-lasting light sources and filters, offering up to 20,000 hours of maintenance-free performance, and even longer in our extended modes.

Key technologies





Equal White (WLO) and Colour Light Output (CLO)

White brightness alone cannot bring the true colours you see everyday to life. That's why the 3LCD technology found in Epson's projectors delivers an equally high WLO and CLO.

CLO is a metric that measures a projector's ability to deliver colour. Developed by colour scientists using the same approach as WLO (Brightness) measurement, CLO provides a simple, accurate and easy-to-understand way to evaluate projector colour performance.

Epson projectors deliver consistently trueto-life images and rich colours that are up to three times brighter than 1-chip DLP projectors².



Laser light source

Experience astonishing quality and reliability with Epson's new laser light source projectors. The newly developed phosphor wheel and LCD panels are made of inorganic materials with superior light and heat-resistance to deliver excellent reliability. Combining an inorganic phosphor wheel with inorganic LCD panels in a laser projector results in bright, vibrant images for extremely long periods.



4K PRO-UHD

4K PRO-UHD⁵ delivers a bright, amazingly sharp lifelike picture by combining advanced Epson technologies with the ability to accept native 4K content and upscale non-4K content exceeding Full HD resolution.



sound by **YAMAHA**

Sound by YAMAHA

Enhance your home entertainment experience with premium sound featuring Yamaha's unique and powerful DSP processing technology AudioEngineTM, that delivers stunning 3D surround sound to match the immersive screen size.

*EF-12 and EH-LS300 only

Stream, share and collaborate

Wirelessly stream and share

iProjection for PC / Mac

Wireless Screen Mirroring solution that utilises the built-in Wi-Fi connection of the presenter's device to stream and share content to the projector. Up to 50 devices can be connected to the same projector and up to four can present their content at the same time. The built-in moderator mode allows one user to take control of incoming content from the connected devices.

iProjection App for iOS / Android

Feature-rich BYOD solution for smartphones and tablets allows users to stream and share content, annotate and even control the projector, all directly from their devices. There is also a multi device mode for group collaboration. The built-in moderator mode allows one user to take control of incoming content from the connected devices.

iProjection App for Chromebooks

Supports fully mirrored display of all your Chromebook content including Google Docs, Slides, Sheets and Chrome browser.

Screen Mirroring (Miracast)

Industry-wide standard that enables Screen Mirroring from compatible smartphones, tablets and PCs to enhance BYOD flexibility and provide the freedom of wireless connectivity.

Interactivity and collaboration

GoBoard Education

GoBoard Education software enables users to connect, create and collaborate through a whiteboard canvas with many integrated features driven from the Hub software. Combined wireless connectivity allows all students in the lesson to view the whiteboard and share their screen.

Easy Interactive Tools

Gives you annotation and drawing capability on projected images or a whiteboard. You can also perform simple control of your document camera and projector.

Projector management solutions

Monitoring and control

Epson Projector Management

The free-to-download centralised management utility lets IT, facilities and network managers efficiently monitor, control and manage their Epson display solution fleet. The software is also compatible with PJLink certified devices. Functions include operation status, error reporting and input source switching. The scheduling feature can power down all the projectors in a building, while error monitoring helps avoid delays and downtime.

Epson Projector Professional Tool

You can quickly and easily create perfectly aligned images with the Epson Projector Professional Tool. Our free, downloadable software utility improves the speed of set-up for multi-projector installations. It also gives you access to more advanced techniques straight out of the box.

Epson Projector Configuration Tool

This free application for smart devices makes setting up and configuring multiple projectors easy. Simply register the projector's data using NFC connectivity, read and edit the settings in the app and then upload the settings to a fleet of projectors without even needing to power the projectors on.

Content management

Epson Projector Content Manager

Create playlists using photos, videos, shape filters and effects, which can be scheduled and saved to an external storage device for cableless content playback directly on the projector.

Epson Creative Projection

Create custom content on your smartphone or tablet, with ease. Enliven rooms and product displays by combining your photos and movies with the app's built-in templates and stamps.

Utilities

Epson has the tools to help you select the perfect projector for your application; with calculators to help you work out the ideal display size and select the Epson display solution to suit the environment.

Throw distance calculator

Easily work out image sizes and projection distance dimensions across our entire projector range. Simply select your desired screen size or the projection distance, and the smart online tool will automatically calculate all the necessary installation dimensions.

	Ultra portable	e/huddle room	Portable		Por	table	
Model	EB-1780W	EB-1795F	CO-W01	EB-W06	EB-FH06	EB-W51	EB-FH52
	100 III		100 mm	D50H .	PROK. A.	5200	9907
Resolution	WXGA (1280 x 800)	Full HD (1920 x 1080)	WXGA	WXGA	Full HD	WXGA	Full HD (1920 x 1080)
Native aspect	16:10	16:9	16:10	16:10	16:9	16:10	16:9
Colour Light Output (lumens) normal / eco	3,000 / 1,900	3,200 / 1,900	3,000 / 2,000	3,700 / 2,400	3,500 / 2,300	4,000 / 2,600	4,000 / 2,400
Contrast ratio	10,000:1	10,000:1	-	16,000:1	16,000:1	16,000:1	16,000:1
Lightsource	Lamp	Lamp	Lamp	Lamp	Lamp	Lamp	Lamp
Lightsource life (hours) normal / eco	4,000 / 7,000	4,000 / 7,000	6,000 / 12,000	12,000 / 6,000	12,000 / 6,000	12,000 / 6,000	5,500 / 12,000
Throw ratio in native aspect	1.0 - 1.26:1	1.02 - 1.23:1	1.27 - 1.71:1	1.30 - 1.56:1	1.22 - 1.47:1	1.30 - 1.56:1	1.32 - 2.14:1
Scalable image size (diagonal)	30 - 300"	30 - 300"	25 - 378"	33 - 320"	34 - 332"	33 - 320"	30 - 300"
Zoom	Optical x1.2	Optical x1.2	Digital x1.35	Optical x1.2	Optical x1.2	Optical x1.2	Optical x1.6
Vertical keystone Horizontal keystone	Automatic ±30° Manual ±30°	Automatic ±30° Automatic ±20°	Manual ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°
Lens shift	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Speaker output	1W	1W	5W Mono	2W Mono	2W Mono	2W Mono	16W
Connectivity	VGA in, Composite RCA, USB Type B, USB Type A, HDMI	VGA in, Composite RCA, USB Type B, USB Type A, HDMI, Screen Mirroring (Miracast)	USB 2.0 Type B (Service Only), USB 2.0 Type A	HDMI in, VGA in, USB 2.0 Type A, USB 2.0 Type B	HDMI in x2, VGA in, USB 2.0 Type A, USB 2.0 Type B	HDMI in, VGA in, USB 2.0 Type A, USB 2.0 Type B	VGA in, HDMI in x2, Composite in, USB 2.0 A, USB 2.0 Type B, Wire LAN, Screen Mirroring (Miracast)
Audio connectivity	Stereo mini in	Stereo mini in	N/A	RCA pair in	RCA pair in	RCA pair in	RCA pair in
Networking	Wireless LAN	Wireless LAN	Wireless LAN adapter - sold separately	Wireless LAN adapter - sold separately	Wireless LAN adapter - sold separately	Wireless LAN adapter - sold separately	Wireless LAN unit
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook	N/A	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebo Epson Projector Management
Other features	3-in-1 USB display, AV mute slide, DICOM SIM colour mode, Split screen, PC-free presentation, Kensington lock, Wreless LAN security, Password protection, Carry case	3-in-1 USB display, AV mute slide, DICOM SIM colour mode, Split screen, PC-free presentation, Auto screen fit and Auto focus, Real time keystone correction, Gesture Presenter, NFC, Kensington lock, Wireless LAN security, Password protection, Carry case	AV mute, Built-in speaker, Horizontal and vertical keystone correction, MHL audio/video interface, Quick Corner, Kensington lock	AV mute slide, Horizontal keystone slider, Quick corner correction, Spilt screen, Auto source search, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	AV mute slide, Hortzontal keystone slider, Quick corner correction, Split screen, Auto source search, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QIR code function, Kensington lock, Padlock, Security cable hole, Stream and share features, Password protection, Carry case	AV mute slide, Horizoni keystone slider, Quick corner correction, Split screen, Auto source search, QR code functic Kensington lock, Padloc Security cable hole, Stream and share featur Password protection, Carry case
Noise (dB) normal / eco	39/30	39 / 30	38 / 29	37 / 28	37 / 28	37 / 28	37 / 28
Weight (kg)	1.8	1.8	2.4	2.5	2.7	2.5	3.1
Dimensions exc. feet (W x D x H mm)	292 x 213 x 44	292 x 213 x 44	295 x 211 x 87	302 x 237 x 82	302 x 252 x 92	302 x 237 x 82	309 x 282 x 90
Power consumption normal / eco	277W / 200W	295W / 208W	270W / 214W	327W / 225W	327W / 225W	327W / 225W	327W / 225W
Power consumption standby, comm. off	0.34W	0.34W	0.5W	0.3W	0.3W	0.3W	0.3W
TCO Certified	Yes	Yes	N/A	N/A	N/A	N/A	N/A
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A	N/A
lens included Warranty	Projector - 5 years	Projector - 5 years	Projector - 2 years	Projector - 2 years	Projector - 2 years	Projector - 2 years	Projector - 3 years
)	Lamp - 5 years / 1,000hrs	Lamp - 5 years / 1,000hrs		Lamp - 1 year / 1,000hrs	Lamp - 1 year / 1,000hrs	Lamp - 1 year / 1,000hrs	Lamp - 3 years / 1,000

					Meeti	ng room	
Model	CO-FH01	CO-FH02	EB-E20	EB-X49	EB-W49	EB-982W	EB-992F
			1940x <u>\$</u> 5	wor s	Brick S.	B30X .	B90N
Resolution	Full HD	Full HD	XGA (1024 x 768)	XGA (1024 x 768)	WXGA (1280 x 800)	WXGA (1280 x 800)	Full HD (1920 x 1080)
lative aspect	16:9	16:9	4:3	4:3	16:10	16:10	16:9
Colour Light Output (lumens) cormal / eco	3,000 / 2,000	3,000 / 2,000	3,400 / 2,200	3,600 / 2,400	3,800 / 2,600	4,200 / 2,600	4,000 / 2,400
Contrast ratio	-	-	15,000:1	16,000:1	16,000:1	16,000:1	16,000:1
ightsource	Lamp	Lamp	Lamp	Lamp	Lamp	Lamp	Lamp
ightsource life (hours) ormal / eco	6,000 / 12,000	6,000 / 12,000	6,000 / 12,000	6,000 / 12,000	8,000 / 17,000	6,500 / 17,000	6,500 / 17,000 / N/
hrow ratio in native aspect	1.19 - 1.61:1	1.19-1.61:1	1.44 - 1.95:1	1.48 - 1.77:1	1.30 - 1.56:1	1.38 - 2.24:1	1.32 - 2.14:1
calable image size diagonal)	26 - 391"	26 - 391"	30 - 350"	30 - 300"	33 - 320"	29 - 280"	30 - 300"
oom	Digital x1.35	Digital x1.35	Digital x1.35	Optical x1.2	Optical x1.2	Optical x1.6	Optical x1.6
ertical keystone forizontal keystone	Manual ±30° Manual ±30°	Auto ±30° Manual ±30°	Manual ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°	Automatic ±30° Manual ±30°
ens shift	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Speaker output	5W Mono	5W Mono	5W	5W	5W	16W	16W
Connectivity	HDMI, USB 2.0 Type A, USB 2.0 Type B (Service Only)	HDMI, USB 2.0 Type A, USB 2.0 Type B (Service Only)	VGA in x2, VGA out, HDMI in, Composite in, USB 2.0 Type B, RS-232C	VGA in x2, VGA out, HDMI in, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)	VGA in x2, VGA out, HDMI in x2, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)	VGA in x2, VGA out, HDMI in x2, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)	VGA in x2, VGA out HDMI in x2, Compo in, Wireless LAN, So Mirroring (Miracast), 2.0 Type A, USB 2.0 B, RS-232C, RJ45
Audio connectivity	N/A	N/A	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input
Networking	Wireless LAN adapter - sold separately	Via Android TV device	N/A	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and Wireless LAN unit
Epson software solutions	N/A	N/A	N/A	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Mindows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Ep iProjection App for i Android and Chrom Epson Projector Management
Other features	AV mute, Built-in speaker, Horizontal and vertical keystone correction, MHL audio/video interface, Quick Corner, Kensington lock	Android TV, AV mute, Automatic keystone correction, Bulli-in speaker, Horizontal and vertical keystone correction, MHL audio/video Interface, Quick Corner, Kensington lock	AV mute slicle, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	A/V mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, OR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	A/V mute slide, Horix keystone slider, Quic comer correction, Sy screen, Auto source search, QR code fur Kensington lock, Pa Security cable hole, Stream and share fe Password protection Optional carry case
Noise (dB) normal / eco	38 / 29	37 / 29	37 / 28	37 / 28	37 / 28	37 / 28	37 / 28 / N/A
Veight (kg)	2.4	2.6	2.7	2.7	2.7	3.1	3.1
limensions exc. feet W x D x H mm)	295 x 211 x 87	320 x 211 x 87	302 x 249 x 87	302 x 249 x 87	302 x 249 x 87	309 x 282 x 90	309 x 282 x 90
ower consumption ormal / eco	270W / 214W	270W / 214W	327W / 225W	327W / 225W	327W / 225W	327W / 225W	327W / 225W / N/A
Power consumption standby, comm. off	0.5W	0.5W	0.3W	0.3W	0.3W	0.3W	0.3W
CO Certified	N/A	N/A	N/A	N/A	N/A	N/A	N/A
			AL/A	AL/A	N/A	N/A	N/A
Standard interchangeable ens included	N/A	N/A	N/A	N/A	IN/A	N/A	IN/A

	Agile/collaboration	space (short throw)	Agile/collaboration space				
Model	EB-L210SW	EB-L210SF	EB-685W	EB-76	ow	EB-770F	EB-810E
	DOON A	EPOON A					
desolution	WXGA (1280 x 800)	Full HD (1920 x 1080)	WXGA (1280 x 800)	WXGA (1280 x 800)	Full HD (1920 x 1080)	4KE (1080p)
lative aspect	16:10	16:9	16:10	16:10		16:9	16:9
olour Light Output (lumens) ormal / eco	4,000 / 2,800	4,000 / 2,800	3,500 / 2,900	4,100 / 2	2,800	4,100 / 2,800	5,000 / 3,500
ontrast ratio	2,500,000:1	2,500,000:1	14,000:1	2,500,00	00:1	2,500,000:1	2,500,000:1
ightsource	Laser	Laser	Lamp	Laser		Laser	Laser
ightsource life (hours) ormal / eco / eco2	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A	5,000 / 10,000 / 9,000	20,000 /	/ 30,000 / N/A	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A
hrow ratio in native aspect	0.48 - 0.65:1	0.45 - 0.61:1	0.28:1	0.27 - 0	.37:1	0.25 - 0.35:1	0.16:1
icalable image size diagonal)	53 - 120"	55 - 125"	60 - 100"		3" 16:10 wall mount 0" 16:10 table mount	71 - 143" 16:9 wall mount 60 - 150" 16:9 table mount	80 - 150" wall mount 80 - 160" table mount
Coom	Digital x1.35	Digital x1.35	Digital x1.35	Digital x	1.35	Digital x1.35	
/ertical keystone Horizontal keystone	Manual ±15° Manual ±15°	Manual ±15° Manual ±15°	Manual ±3° Manual ±3°	Manual : Manual :		Manual ±3° Manual ±3°	N/A N/A
ens shift	N/A	N/A	N/A	N/A		N/A	N/A
Speaker output	16W	16W	16W	16W		16W	2 x 8W
Connectivity	VGA in x2, VGA out, HDMI x2, USB Type A (5v/2A), USB Type B, Composite RCA, RS- 232C, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI x2, USB Type A (5v/2A), USB Type B, Composite RCA, RS- 232C, Screen Mirroring (Miracast), Wireless LAN	VGA in, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A x2, USB Type B, MHL (via HDMI 1), RS-232C	HDMI x3 (5v/2A x	x2, VGA out, 3, Composite, USB Type A x2 11), USB Type B, RS-232C, Mirroring (Miracast), Wireless	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (Sv/2A x1), USB Type B, R5-232C, Screen Mirroring (Miracast), Wireless LAN	HDMI in x2, out x1 (HDCP2.3), HDBaseT 1 (HDCP2.3), RS-232C, USB Type-A x2 (1x for data and ELPAP11, 1x for data and 2A pow USB Type B x1, Screen Mirroring (Miracast), Wireless LAN
	Stereo mini in x2, Microphone stereo mini in, Stereo mini out, RCA pair in	Stereo mini in x2, Microphone stereo mini in, Stereo mini out, RCA pair in	Stereo mini in x3, Microphone stereo mini in, Stereo mini out		nini in x3, Microphone stereo Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	N/A
Networking	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ wireless	145) and LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iF	Projection (Windows/Mac), Projection App for iOS, Android omebook, Epson Projector ment	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac). Epson iProjection App for IOS, An and Chromebook, Epson Projector Management, Epson Projector Co Manager (Windows/macOS), Epson Creative Projection (iOS), Epson S Assistant
Other features	Stream and share features, AV mute, Copy OSD settings, Quick corner correction, Pc-free presentation, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, optional carry case, Optional wall mount or ceiling mount	Stream and share features, 21:9 display, AV mute, Copy OSD settings, Quick comer correction, PC-free presentation, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, optional carry case, Optional wall mount or ceiling mount	Home screen, Multi-screen interactivity, Auto source search, AV mute, Split screen up to 2 sources, Screen up to 2 sources, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, PC-free presentation, Padlock, Security cable hole, Kensington lock	features (client), A Quick co presenta sources, Security	I mount, Stream and share, , Screen sharing function AV mute, Copy OSD settings, orner correction, PC-free ation, Split screen up to 4 , Auto source search, Padlock, cable hole, Kensington lock, LAN unit lock, Password on	Optional mount, edge-blending, 16:6 display, 21:9 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Optional wall and ceiling mounts, 21:9 optional output, Improved au chamber for impowed bass and o sound quality. Automated screen distortion correction via app, and share features, Screen sharing fur (client), AV mute, Copy OSD setti Ouck corner correction, PC-free presentation, Split screen up to 2 sources, Auto source search, Pad Security cable hole, Kensington to Wireless LAN unit lock, Password protection
Noise (dB) normal / eco / eco2	37 / 27 / N/A	37 / 27 / N/A	35 / 30 / 29	37 / 27	/ N/A	37 / 27 / N/A	38 / 27 / N/A
Veight (kg)	4.6	4.6	5.7	5.9 kg		5.9 kg	12.2
Dimensions exc. feet W x D x H mm)	325 x 337 x 90	325 x 337 x 90	367 x 400 x 149	356 x 39	95 x 133	356 x 395 x 133	695 x 341 x 145
Power consumption normal / eco / eco2	260W / 191W / N/A	260W / 191W / N/A	354W / 309W / 309W	263W /	199W / N/A	263W / 199W / N/A	440W / N/A
Power consumption standby, comm. off	0.5W	0.5W	0.37W	0.5W		0.5W	0.5W
	N/A	N/A	Yes	N/A		N/A	N/A
Standard interchangeable ens included	N/A	N/A	N/A	N/A		N/A	N/A
	5 years / 12,000hrs	5 years / 12,000hrs	Projector - 5 years		/ 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs
Varranty	0 yours / 12,0001118	o yoars/ 12,0001115	Lamp - 5 years / 1,000hrs	o years	12,00010	0 yours / 12,0001113	o yoars/ 12,0001118

	Interac	ctive agile/collaboration	n space	Int	teractive agile/collaboration spa	ace
Model	EB-685Wi	EB-695Wi	EB-760Wi	EB-770Fi	EB-780Fi SMART	EB-1485Fi
		2 1991 III				
Resolution	WXGA (1280 x 800)	WXGA (1280 x 800)	WXGA (1280 x 800)	Full HD (1920 x 1080)	Full HD (1920 x 1080)	Full HD (1366 x 768 x 2)
Native aspect	16:10	16:10	16:10	16:9	16:9	16:9
Colour Light Output (lumens) normal / eco	3,500 / 2,900	3,500 / 2,900	4,100 / 2,800	4,100 / 2,800	4,100 / 2,800	5,000 / 3,500
Contrast ratio	14,000:1	14,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lightsource	Lamp	Lamp	Laser	Laser	Laser	Laser
Lightsource life (hours) normal / eco / eco2	5,000 / 10,000 / 9,000	5,000 / 10,000 / 9,000	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect	0.28:1	0.28:1	0.27:1 - 0.37:1	0.25:1 - 0.35:1	0.25:1 - 0.35:1	0.27:1
Scalable image size (diagonal)	60 - 100"	60 - 100"	65 - 100"	65 -100" / 16:9 aspect 60 - 110" / 16:6 aspect	65 -100" / 16:9 aspect	65 - 100" / 16:9 aspect
Zoom	Digital x1.35	Digital x1.35	Digital x1.35	Digital x1.35	60 - 110" / 16:6 aspect Digital x1.35	61 - 120" / 16:6 aspect Digital x1.35
	Manual ±3°	Manual ±3°	Manual ±3°	Manual ±3°	Manual ±3°	Manual ±3°
Vertical keystone Horizontal keystone	Manual ±3°	Manual ±3°	Manual ±3°	Manual ±3°	Manual ±3	Manual ±3
Lens shift Speaker output	N/A 16W	N/A 16W	N/A 16W	N/A 16W	N/A 16W	N/A 2 x 8W
Connectivity	VGA in x2, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A, USB Type B, MHL (via HDMI 1), RS- 232C, Sync in, Sync out	VGA in x2, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A, USB Type B, MHL (via HDMI 1), RS- 232C, Sync in, Sync out	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B x2, RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B x2, R5-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B x2, RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN	VGA in, VGA out, HDMI x3, USB Type A x2, USB Type B, HDMI-out, RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN, HDBaseT
Audio connectivity	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out
Networking	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	All new smart operating system built-in to the projector, enabling real-time access to online and cloud-based content and systems direct from the interactive display - with no PC needed. Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management.	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management
Other features	Home screen, Multi- screen interactivity, Auto source search, AV mule, Split screen, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, Pen and touch interactivity, Auto calibration, Pc-free presentation, Padlock, Security cable hole, Kensington lock	Home screen, Multi- screen interactivity, Auto source search, AV mute, Split screen, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, Pen and touch interactivity, Auto calibration, Pc-free presentation, Padlock, Security cable hole, Kensington lock	Pen interactivity and optional touch, Optional mount, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Siding split screen, split screen up to 4 sources, AV mute, Copy OSD settings, Quick corner correction, Pc-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wreless LAN unit lock, Password protection	Pen interactivity and optional touch, Optional mount, edge-blending, 16:6 display, 21:9 display, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Siding split screen, split screen up to 4 sources, AV mute, Copy CSD settings, Quick corner correction, PC-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Pen interactivity and optional touch, Optional mount, edge-blending, fi66 display, 21-9 display, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Silding split screen, split screen up to 4 sources, AV mute, Copy OSD settings, Quick corner correction, Pc-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Constant brightness mode, 16:6 display, Interactive home screen, Stream and share features, DuoLink interactivity, Screen sharing function (server/client), Whiteboard mode with document export support, Multiple display via Daisy chain, Auto power, on, Auto source search, AV mute, Sliding split screen, split screen up to 4 sources, Copy OSD settings, Pen and touch interactivity, Auto calibration DICOM SIM colour mode, HDBaseT external control pad, Set-up wizard
Noise (dB) normal / eco / eco2	35 / 30 / 29	35 / 30 / 29	37 / 27 / N/A	37 / 27 / N/A	37 / 27 / N/A	36 / 27 / N/A
Weight (kg)	5.8	5.8	6.0	6.0	6.3	9.7
Dimensions exc. feet (W x D x H mm)	367 x 400 x 149	367 x 400 x 149	356 x 395 x 133	356 x 395 x 133	357 x 425 x 191.5	458 x 209.5 x 375
Power consumption normal / eco / eco2	354W / 309W / 309W	354W / 309W / 309W	263W / 199W / N/A	263W / 199W / N/A	263W / 199W / N/A	366W / 262W
Power consumption standby, comm. off	0.37W	0.37W	0.5W	0.5W	0.5W	0.5W
TCO Certified	Yes	Yes	N/A	N/A	N/A	Yes
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	Projector - 5 years	Projector - 5 years	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs
16	Lamp - 5 years / 1,000hrs	Lamp - 5 years / 1,000hrs				

		Large meeting room			Large me	eting room	
Model	EB-2250U	EB-L210W	EB-L260F	EB-L520U	EB-L720U	EB-L530U	EB-L630U
	E900N	BOOM I	IPON B A	Secon Secon	1)))))	1331))	111111 1550N
Resolution	WUXGA (1920 x 1200)	WXGA (1280 x 800)	Full HD (1920 x 1080)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
ative aspect	16:10	16:10	16:9 (supports 16:6 and 21:9)	16:10	16:10	16:10	16:10
olour Light Output (lumens) ormal / eco	5,000 / 3,800	4,500 / 3,100	4,600 / 3,200	5,200 / 3,640	7,000 / 4,900	5,200 / 3,640	6,200 / 4,340
ontrast ratio	15,000:1	2,500,000:1	2,500,000:1	Over 2,500,000:1	Over 2,500,000:1	2,500,000:1	2,500,000:1
ghtsource	Lamp	Laser	Laser	Laser	Laser	Laser	Laser
ghtsource life (hours) ormal / eco	5,000 / 10,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
hrow ratio in native aspect	1.38 - 2.28:1	1.41 - 2.26:1	1.32 - 2.12:1	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1
icalable image size diagonal)	50 - 300"	30 - 300"	31 - 310"	50 - 500"	50 - 500"	50 - 500"	50 - 500"
oom	Optical x1.6	Optical x1.62	Optical x1.62	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6
/ertical keystone	Automatic ±30°	Automatic ±30°	Automatic ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°
lorizontal keystone	Automatic ±20°	Automatic ±30°	Automatic ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°
ens shift	N/A	N/A	N/A	N/A	N/A	± 50% Vertical ± 20% Horizontal	± 50% Vertical ± 20% Horizontal
peaker output	16W	16W	16W	10W	10W	10W	10W
connectivity	VGA in x2, VGA out, HDMI x2, Composite RCA, USB Type A, USB Type B, RS-232C, MHL (via HDMI 1)	VGA in (2x), VGA out, Composite in, HDMI in x2, USB Type A (2A), USB Type B, RS-232C, RJ45, Wireless LAN, Screen Mirroring (Miracast)	VGA in x2, VGA out, Composite in, HDMI in x2, USB Type A (2A), USB Type B, RS-232C, RJ45, Wireless LAN, Screen Mirroring (Miracast)	VGA in x2, VGA out, HDMI in x2, HDBaseT, Miracast (when use ELPAP11), USB Type A, USB Type B, RS- 232C, Ethernet, Wireless LAN a/n (SGHz) (optional)	VGA in x2, VGA out, HDMI in x2, HDBaseT, Miracast (when use ELPAP11), USB Type A, USB Type B, RS- 232C, Ethernet, Wireless LAN a/n (5GHz) (optional)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VI out, RS-232C, USB Typ A x2, USB Type B, Scre Mirroring (Miracast)
udio connectivity	RCA pair in, Stereo mini in x2, Stereo mini out	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x)	Stereo mini out, Stereo mini in (2x)	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stere mini out
letworking	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in win and optional wireless LAN unit
pson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson Projector Management, Epson IProjection (Win/Mac/ Chrome/(OS/Android), USB Display (Win/Mac), Epson Wireless Transmitter Settings (Win/Mac)	Epson Projector Management, Epson iProjection (Win/Mac/ Chromer/OS/Android), USB Display (Win/Mac), Epson Projector Content Manager (Win/Mac), Epson Creative Projection (CS), Epson Wireless Transmitter Settings (Win/Mac)	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mao), Epson iProjection App for iOS, Android and Chromebo Epson Projector Professional Tool, Epson Projector Management, Epson Projector Conter Manager, Epson Creativ Projection
Other features	Home Screen, Gesture Presenter, AV mute, screen fit, Split screen, Auto power on, DICOM colour mode, DCD by Faroudja, Schedule function, Focus help, Real time keystone correction, Quick corner, PC-free presentation, 3-in- 1 USB display, Padlock, Security bar, Kensington lock	AV mute slide, Horizontal keystone slider, Quick comer correction, PC-free, Split screen - up to 4 sources, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Wireless LAN security, Password protection, VESA mount, Optional carry case,	Edge-blending, 16:6 display, 21:9 display, PC-free, AV mute slide, Horizontal keystone slider, Quick corner correction, PC-free, Spilt screen - up to 4 sources, Auto source search, OR code function, Kensington lock, Padlock, Security cable hole, Wireless LAN security, Content playback., Password protection, DICOM SIM, includes cable cover, VESA mount, Optional carry case	AV mute, Arc correction, Edge blending, PC Free, Quick corner, Screen share, Source function, Ultra- wide display (16:6), Home Screen, AV mute, Split screen - up to 4 sources, Auto power on, Auto source search, Quick startup, Padlock, Security cable hole, Kensington lock, 360° installation, Wireless LAN unit lock	AV mute, Arc correction, Edge blending, PC Free, Quick corner, Screen share, Source function, Ultra-wide display (16:6), Home Screen, AV mute, Split screen - up to 4 sources, Auto power on, Auto source search, Quick startup, Padlock, Security cable hole, Kensington lock, 360° installation, Wireless LAN unit lock	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-project Point and Arc correction Schedule function, Split screen, Auto source search, Copy OSD settir Padlock, Security cable hole, Kensington lock, 3 installation, Cable cover included
Noise (dB) normal / eco	39 / 29	37 / 27 / N/A	37 / 27	31 / 23	39 / 27	31 / 23	38 / 27
/eight (kg)	4.6	4.5	4.2	7.7	7.8	8.2	8.4
imensions exc. feet V x D x H mm)	377 x 291.5 x 110	325 x 299 x 90	325 x 299 x 90	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122
ower consumption ormal / eco	405W / 323W	260W / 191W	260W / 191W	293W / 223W	345W / 258W	293W / 223W	345W / 258W
ower consumption andby, comm. off	0.31W	0.5W	0.5W	0.3W	0.3W	0.3W	0.3W
CO Certified	No	N/A	N/A	Yes	Yes	Yes	Yes
tandard interchangeable	N/A	N/A	N/A	N/A	N/A	N/A	N/A
/arranty	Projector - 5 years	5 years / 12,000hrs	5 years / 12,000hrs	3 years	3 years	3 years	3 years

		Large meeting room			Large meeting room	
Model	EB-L730U	EB-L735U	EB-L630SU	EB-L635SU	EB-L570U	EB-L770U
	111111 EPSCH		(1))))) (550M	POO_	111111 EFGRI	3))))) GSON
Resolution	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	4KE (WUXGA)	4KE (WUXGA)
Native aspect	16:10	16:10	16:10	16:10	16:10	16:10
Colour Light Output (lumens) normal / eco	7,000 / 4,900	7,000 / 4,900	6,000 / 4,200	6,000 / 4,200	5,200 / 3,640	7,000 / 4,900
Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lightsource	Laser	Laser	Laser	Laser	Laser	Laser
Lightsource life (hours) normal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect	1.35 - 2.20:1	1.35 - 2.20:1	0.8:1	0.8:1	1.35 - 2.20:1	1.35 - 2.20:1
Scalable image size diagonal)	50 - 500"	50 - 500"	50 - 200"	50 - 200"	50 - 500°	50 - 500"
Zoom	Optical x1.6	Optical x1.6	Digital x1.35	Digital x1.35	Optical x1.6	Optical x1.6
Vertical keystone Horizontal keystone	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°
Horizontal keystone Lens shift	Manual ±30° + 50% Vertical	Manual ±30° ± 50% Vertical	Manual ±30° ± 50% Vertical	Manual ±30° ± 50% Vertical	Manual ±30° ± 50% Vertical	Manual ±30° ± 50% Vertical
	± 20% Horizontal	± 20% Horizontal	± 20% Horizontal	± 20% Horizontal	± 20% Horizontal	± 20% Horizontal
Speaker output	10W	10W	10W	10W	10W	10W
Connectivity	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, RS-232C, USB Type A (2A), USB Type B, Optional wireless (ELPAP11)	HDMI in x2, HDMI out, HDBaseT, RS-232C, USB Type A (2A), USB Type B, Optional wireless (ELPAP11)
Audio connectivity	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini out	Stereo mini out
Networking	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), optional wireless LAN unit	LAN (RJ45), optional wireless LAN uni
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson Projector Management (Win), Epson Projection (Win/Mac/OS/ Android/Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/Mac), Epson Creative Projection (iOS)	Epson Projector Management (Win), Epson iProjection (Win/Mac/IOS/ Android/Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/Mac) Epson Creative Projection (IOS)
Other features	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multiprojection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Dalsy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Securify cable hole, Kensington look, 360° installation, Cable cover included	AV mute, Edge blending, Point correction, Quick Corner, Curved surface correction, Corner vall, Geometry correction memory, Schedule, Split screen, Source search, Padiock & Security Cable Hole, Kensington Lock, Wireless LAN Unit Lock, PC Free (Still inage/ Movie), Copy OSD settings, Projector Control and Management, 360° installation, Cable cover included, Optional camera for simple stacking and blending	Schedule setting, Split screen, Source search, Padlock & Security Cable Hole Kensington Lock, Wireless LAN Unit
Noise (dB) normal / eco	38 / 27	38 / 27	38 / 27	38 / 27	31 / 23	38 / 27
Weight (kg)	8.4	8.4	8.4	8.4	8.3	8.5
Dimensions exc. feet (W x D x H mm)	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122
Power consumption normal / eco	345W / 258W	345W / 258W	345W / 258W	345W / 258W	312W / 234W	366W / 268W
Power consumption standby, comm. off	0.3W	0.3W	0.3W	0.3W	0.5W	0.5W
TCO Certified	Yes	Yes	N/A	N/A	N/A	N/A
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	3 years	3 years	3 years	3 years	3 years	3 years

Revolution Part P		Large meeting room	Lighting 8	& Signage		Lighting	& Signage	
Marcal Association	Model		EB-U50	EV-110	EV-115	EB-L260F	EB-L265F	EB-770F
### 46 MARCA ### 1900 1900 1900 1900 1900 1900 1900 1				100000000000000000000000000000000000000	II.			
1810 1810		DECH DECH	- 0			1990	9700	proon .
2007 2007	lesolution	4KE (WUXGA)	WUXGA (1920 x 1200)	WXGA (1280 x 800)	WXGA (1280 x 800)	Full HD (1920 x 1080)	Full HD (1920 x 1080)	Full HD (1920 x 1080)
	lative aspect	16:10	16:10	16:10	16:10		16:9	16:9
Later Late	olour Light Output (lumens) ormal / eco	7,000 / 4,900	3,700 / 2,400	2,200 / 1,100	2,200 / 1,100	4,600 / 3.200	4,600 / 3.200	4,100 / 2,800
20000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,00000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,0000/30,0000 20,00000/30,0000 20,00000/30,00000 20,00000/30,	ontrast ratio	2,500,000:1	16,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
1.50 - 2.201 1.50 - 2.201 1.50 - 2.201 1.50 - 2.101 1.50		Laser		Laser	Laser	Laser	Laser	
20	ightsource life (hours) ormal / eco	20,000 / 30,000	10,000 / 17,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Optional 1.5		1.35 - 2.20:1	1.38 - 1.68:1	1.38 - 2.19:1	1.38 - 2.19:1	1.32 - 2.12	1.32 - 2.12	0.25 - 0.35:1
Optional 1.5	calable image size liagonal)	50 - 500"	30 - 300"	30 - 150"	30 - 150"	31 - 310"	31 - 310"	60 - 150" / 16:9 asp 56 - 140" / 16:6 asp
# 10% White Whit		Optical x1.6	Optical x1.2	Optical x1.6	Optical x1.6	Optical x1.62	Optical x1.62	Digital x1.35
# 20% Notice # 20% Notice # 20% Note	ertical keystone							
Power in contract Powe								
## PMI in x2, FMM out. HBBss File 8-22C. USB Type B, Cytorian vireioses USB Type B, Cytorian								
Holland F. R-220C, USB Type A for CPI Lind Dyna Del Signe Control viviles Fig. 24 (2.08) Each for Management (Fig. 25) Fig. 24 (2.08) Each for Management (Fig. 25) Fig. 24 (2.08) Fi			VGA in, VGA out, HDMI					VGA in x2, VGA out,
Stero min cut LAN (RJ45), optional wireless LAN in the land in		USB Type A (2A), USB Type B, Optional wireless	x 2, USB Type A (for 1,200mA power supply), USB Type B (for firmware	USB Type A (for GPI function or 5V/2A power supply), USB Type B (for	function or 5V/2A power supply), USB Type B (for	HDMI x2, Composite, USB Type A x1, USB Type B, RS-232C, Screen Mirroring	Type A x1, USB Type B, RS-232C, Screen Mirroring	x3, Composite, USB x2 (5v/2A x1), USB T RS-232C, Screen Mi (Miracast), Wireless L
LAN (R.45) and wireless LAN initial wireless LAN (R.45) and mirror solutions wireless LAN initial wireless LAN (R.45) and mirror solutions. Epson Projector Management (Min), Epson Projector Management (R.55) and Android, Epson Projector Management, Epson Projector Content Manager, Epson Projector Management, Epson Projector Managemen	udio connectivity	Stereo mini out		Stereo mini out, Bluetooth	Stereo mini out, Bluetooth	mini in (2x), RCA pair in,		Stereo mini in x3, Microphone stereo m Stereo mini out
Epson Projection Windows/Mac (Figure 1997) (Projection Mymos/Mac) (P	letworking	LAN (RJ45), optional wireless LAN unit		LAN (RJ45) and wireless LAN		LAN (RJ45), built-in wireless and optional wireless	and optional wireless	LAN (RJ45) and wireless LAN unit
Point correction, Quick Correct, Quarted surface correction, Corner, Quarted surface correction, Corner vall, Geometry correction memory, Schedule setting, Spit sozen, Source search, AV mute, SD card playback for source free signage, Optional lighting track mount and celling mount floor stand source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand. Edge benefity, Schedule setting, Spit sozen, Source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand. Edge benefity, Source value, Copy CSD settings, Quick corner correction, PC-free presentation, Spit sozene up to 4 sources, Auto source search, AV mute, Cpp voltable, Kensington Lock, Writess LAN Unit Lock, PC Free (Still imager Movie), Copy CSD settings, Projector Control and Management, 300° installation, Edge cover included, Optional camera for simple stacking and blending Noise (dB) normal / eco 38 / 27 37 / 28 34 / 22 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 37 / 27 38 / 27 Weight (kg) 360 x 110 x 55 361 x 110 x 55 361 x 110 x 55 361 x 110 x 55 260 x 175 Power supply 361 x 110 x 65 149W / 122W 260W / 191W	pson software solutions	Management (Win), Epson iProjection (Win/Mac/iOS/ Android/Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/Mac), Epson Creative	(Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Management, Epson	(Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Management, Epson Projector Content Manager,	(Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Management, Epson Projector Content Manager,	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Win Mac), Epson iProjection App for iOS, Android a Chromebook, Epson F Management, Epson C Manager, Epson Creati Projection for iOS
Note	ther features	Point correction, Quick Corner, Curved surface correction, Comer wall, Geometry correction memory, Schedule setting, Spit screen, Source search, Padlock & Security Cable Hole, Kensington Lock, Wireless LAN Unit Lock, PC Free Still image Movie), Copy OSD settings, Projector Control and Management, 360° installation, Cable cover included, Optional camera for	function, Auto source search, AV mute, USB playback for source free signage, Optional lighting track mount and ceiling mount/ floor stand	Home screen, Schedule function, Auto source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand, Edge blending, 360° installation, Built-in	Home screen, Schedule function, Auto source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand, Edge blending, 360° installation, Built-in media	blending, 16:6 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split soreen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Password protection, Content playback, Floor & celling installation, lighting	blending, 16:6 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick comer correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Password protection, Content playback, Floor & ceiling installation, lighting	Optional mount, edge blending, 16:6 display Stream and share fes Screen sharing functi (client), AV mute, Co OSD settings, Quick corner correction, PC presentation, Split so up to 4 sources, Autr source search, Padlo Security cable hole, Kensington lock, Wir LAN unit lock, Passw protection, Content playback, Ceiling inst
Add x 304 x 122 364 x 248 x 95 Projection unit 175 x 280 x 175 175 x 280 x 175 Power supply 961 x 110 x 65 164 x 10 x 65 165		38 / 27	37 / 28	34 / 22	34 / 22	37 / 27	37 / 27	37 / 27
Power supply Power supply Set x 110 x 65 Set x 11								
Power consumption tandby, comm. off 0.5W 0.3W 0.4W 0.4W 0.5W 0.5W 0.5W CO Certified N/A				175 x 260 x 175 Power supply 361 x 110 x 65	175 x 260 x 175 Power supply 361 x 110 x 65			356 x 395 x 133
Power consumption tandby, comm. off 0.5W 0.3W 0.4W 0.4W 0.5W 0.5W 0.5W CO Certified N/A	ower consumption ormal / eco	366W / 268W	285W / 218W	149W / 122W	149W / 122W	260W / 191W	260W / 191W	263W / 199W
CO Certified N/A N/A N/A N/A N/A N/A		0.5W	0.3W	0.4W	0.4W	0.5W	0.5W	0.5W
		N/A	N/A	N/A	N/A	N/A	N/A	N/A
							N/A	
		3 years	Projector - 3 years	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs

		Lighting & Signage			Insta	llation	
Model	EB-775F	EB-800F	EB-805F	EB-PU1006W	EB-PU1007W	EB-PU1007B	EB-PU1008W
	1990			090H	(B)	UPON UPON	BACH
Resolution	Full HD (1920 x 1080)	Full HD (1366 x 768 x 2)	Full HD (1366 x 768 x 2)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
Native aspect Colour Light Output (lumens)	16:9 4,100 / 2,800	16:9 5,000 / 3,500	16:9 5,000 / 3,500	16:10 6,000 / 4,200	16:10 7,000 / 4,900	7,000 / 4,900	16:10 8,500 / 5,950
normal / eco Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lightsource	Laser	Laser	Laser	Laser	Laser	Laser	Laser
Lightsource life (hours) normal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect	0.25 - 0.35:1	0.27 - 0.37:1	0.27 - 0.37:1	1.44 - 2.32:1	1.44 - 2.32:1	1.44 - 2.32:1	1.44 - 2.32:1
Scalable image size (diagonal)	60 - 150" / 16:9 aspect 56 - 140" / 16:6 aspect	65 - 130" in 16:9 aspect 61 - 120" in 16:6 aspect	65 - 130" in 16:9 aspect 61 - 120" in 16:6 aspect	50 - 1,000"	50 - 1,000"	50 - 1,000"	50 - 1,000"
Zoom	Digital x1.35	Digital x1.35	Digital x1.35	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6
Vertical keystone Horizontal keystone	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°
Lens shift	N/A	N/A	N/A	± 67% Vertical ± 30% Horizontal	± 67% Vertical ± 30% Horizontal	± 67% Vertical ± 30% Horizontal	± 67% Vertical ± 30% Horizontal
Speaker output	16W	2x 8W	2x 8W	N/A	N/A	N/A	N/A
Connectivity	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI in x3, HDMI out, Composite in, HDBaseT, RS-232, USB Type A x2, USB Type B	VGA in x2, VGA out, HDMI in x3, HDMI out, Composite in, HDBaseT, RS-232, USB Type A x2, USB Type B	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C USB Type A, USB Type B (Service only), Remote, NFC
Audio connectivity	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out
Networking	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
Epson software solutions	Epson Projection (Windows/ Max), Epson Projection App for IOS, Android and Chromebook, Epson Projector Management, Epson Cortent Manager, Epson Cortent Menager, Epson Creative Projection for IOS	Epson iProjection (Windows/ Mac), Epson iProjection App for iOS, Android and Ohromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/ Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool
Other features	Optional mount, edge- blending, 16:6 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, Content playback, Ceiling install	166 display, Multi-projection via daisy chain, AV mute, USB content playback for source-free signage, Edge blending, Point and Arc correction, Schedule function, Auto source search, Copy OSD settings, DICOM colour mode, Padlock, Security cable hole, Kensington lock, 360° installation, Optional wall mount	16:6 display, Multi-projection via daisy chain, AV mute, USB content playback for source-free signage, Edge blending, Point and Arc correction, Schedule function, Auto source search, Copy OSD settings, DICOM colour mode, Padlock, Security cable hole, Kensington lock, 360° installation, Optional wall mount	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zob. Focus and lens shift, Lens Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zor, Powers and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered 2xi, Pocus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included
Noise (dB) normal / eco	37 / 27	36 / 27	36 / 27	30 / 28	33 / 29	33 / 29	35 / 30
Weight (kg)	5.9	9.2	9.2	15.4	16.3	16.3	16.3
Dimensions exc. feet (W x D x H mm)	356 x 395 x 133	458 x 210 x 375	458 x 210 x 375	545 x 436 x 164	545 x 436 x 164	545 x 436 x 164	545 x 436 x 164
Power consumption normal / eco	263W / 199W	366W / 262W	366W / 262W	367W / 310W	431W / 366W	431W / 366W	535W / 452W
Power consumption standby, comm. off	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
TCO Certified	N/A	Yes	Yes	N/A	N/A	N/A	N/A
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	3 years	3 years	3 years	3 years

		Installation			Insta	llation	
Model	EB-PU1008B	EB-PU2010W	EB-PU2010B	EB-PU2113W	EB-PU2213B	EB-PU2116W	EB-PU2216B
	11111	IIIII BISON	IIIIF Brox	990x	1990	D1000	Brick III
Resolution	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200
lative aspect	16:10	16:10	16:10	16:10	16:10	16:10	16:10
olour Light Output (lumens) ormal / eco	8,500 / 5,950	10,000 / 7,000	10,000 / 7,000	13,000 / 9,100	13,000 / 9,100	16,000 / 11,200	16,000 / 11,200
ontrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
ghtsource ghtsource life (hours)	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000
ormal / eco							
nrow ratio in native aspect calable image size iagonal)	1.44 - 2.32:1 50 - 1,000"	1.57 - 2.56:1 60 - 1,000"	1.57 - 2.56:1 60 - 1,000"	1.57 - 2.56:1 60 - 1,000"	1.57 - 2.56:1 60 - 1,000"	1.57 - 2.56:1 60 - 1,000"	1.57 - 2.56:1 60 - 1,000"
iagonal)	Optical x1.6					Optical 1.6x	Optical 1.6x
	Manual ±45°	Optical x1.6 Manual ±45°	Optical x1.6 Manual ±45°	Optical 1.6x Manual ±45°	Optical 1.6x Manual ±45°	Manual ±45°	Manual ±45°
ertical keystone orizontal keystone ens shift	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°
ens snift	± 67% Vertical ± 30% Horizontal	± 60% Vertical ± 18% Horizontal	± 60% Vertical ± 18% Horizontal	± 60% Vertical ± 18% Horizontal	± 60% Vertical ± 18% Horizontal	± 60% Vertical ± 18% Horizontal	± 60% Vertical ± 18% Horizontal
peaker output	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Connectivity	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS- 232C, USB Type A x2, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), in, HDBaseT, SDI in, out, VGA in, RS-2320 Type A x2, USB Type B (Service only), Remote, NFC
udio connectivity	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out
letworking	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and option
ipson software solutions	Epson iProjection (Windows/Mac), Epson (Windows/Mac), Epson Projection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson (Windows/Mac), Epson Projection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Configl Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson i Projection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projecton, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Eps iProjection App for iC Android and Chrome Epson Projector Professional Tool, Ep Projector Manageme Epson Projector Con Manager, Epson Cre Projection, Epson Pro Config Tool
ther features	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360' installation, Cable cover included	offset UST lens, Optional	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi-projection, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and comer wall correction, 360° installation	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content lplayback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IPSX certified¹	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi-projection, Mechanical shutter, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IP5X certified¹	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Cuwed surface and comer wall correction, 360° installation, IPSX certified¹	4K enhancement, HI support, Powered zz Focus and lens shift, memory, Interchangi lens options includin offset UST lens, Opti camera, Daisy chain multi-projection, Med shutter, Portrait projection, Med Share, Walley and Share and corner or correction, Cur surface and corner or correction, 360° inst IP5X certified*
oise (dB) normal / eco	35 / 30	37 / 30	37 / 30	34 / 29	34 / 29	38 / 34	38 / 34
leight (kg)	16.3	16.8	16.8	23.8	23.7	24.3	24.2
imensions exc. feet V x D x H mm)	545 x 436 x 164	545 x 436 x 164	545 x 436 x 164	586 x 492 x 185	586 x 492 x 185	586 x 492 x 185	586 x 492 x 185
ower consumption ormal / eco	535W / 452W	535W / 452W	535W / 452W	864W / 633W	864W / 633W	1083W / 773W	1083W / 773W
ower consumption andby, comm. off	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
CO Certified	N/A	N/A	N/A	N/A	N/A	N/A	N/A
tandard interchangeable ns included	N/A	N/A	N/A	N/A	N/A	N/A	N/A
arranty	3 years	3 years	3 years	3 years	3 years	3 years	3 years
				1 IP5X certified in accordance with I	EC Standard 60529. The IP5X certific	ation is annied to the ontical engine	and light source module

		Installation			Home	
odel	EB-PU2120W	EB-PU2220B	EB-L30000U	EH-TW6150	EH-TW6250	EH-TW7000
	DOX 11111	PD (1)			3	
Resolution	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	4K PRO-UHD	4K PRO-UHD	4K PRO-UHD
lative aspect	16:10	16:10	16:10	16:9	16:9	16:9
olour Light Output (lumens) ormal / eco	20,000 / 14,000	20,000 / 14,000	30,000 / 21,000	2,800 / 1,900	2,800 / 1,900	3,000 / 2,000
Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	35,000:1	35,000:1	40,000:1
ightsource	Laser	Laser	Laser	Lamp	Lamp	Lamp
ghtsource life (hours) ormal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	4,500 / 7,500	4,500 / 7,500	3,500 / 5,000
hrow ratio in native aspect	1.57 - 2.56:1	1.57 - 2.56:1	1.74 - 2.35:1	1.32 - 2.15:1	1.32 - 2.15:1	1.32 - 2.15:1
calable image size liagonal)	60 - 1,000"	60 - 1,000"	100 - 1,000"	40 - 500"	40 - 500"	40 - 500"
oom	Optical 1.6x	Optical 1.6x	Optical x1.4	Optical x1.62	Optical x1.62	Optical x1.6
ertical keystone lorizontal keystone	Manual ±45°	Manual ±45°	Manual ±45°	Auto ±30°	Auto ±30°	Manual ±30°
lorizontal keystone ens shift	Manual ±30° ± 60% Vertical	Manual ±30° ± 60% Vertical	Manual ±30° ± 65% Vertical	Manual ±30° ± 60% Vertical	Manual ±30° ± 60% Vertical	Manual ±30° ± 60% Vertical
	± 18% Horizontal	± 18% Horizontal	± 30% Horizontal			± 24% Horizontal
peaker output	N/A	N/A	N/A	10W Mono	10W Mono	N/A
Connectivity	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC	VGA in, VGA out, DVI in, BNC in, HDBaseT, HD-SDI, HDMI (HDCP 2.2)	USB 2.0 Type Mini-B (Service Only), Jack plug out, HDMI (HDCP 2.3) (2x), USB 2.0-A	USB 2.0 Type Mini-B (Service Only), Wireless LAN IEEE 802.11a/b/g/n/ac, Jack plug out, HDMI (HDCP 2.3)	HDMI in (x2), USB 2.0 Ty USB 2.0 Type Mini-B
udio connectivity	Stereo mini out	Stereo mini out	N/A	Stereo mini jack	Stereo mini jack	Stereo mini jack, AtpX Bluetooth (SCMS-
letworking	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	Wireless LAN adapter - sold separately	Via Android TV device	Wireless LAN adapter - sold separately
pson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson Projector Management, Epson iProjection (Windows/Mac), Epson iProjection App for (OS and Android, Epson Projector Professional Tool	N/A	N/A	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android
ther features	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mutte, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IPSX certified*	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Dalsy chain multi-projection, Portrait projection, Mechanical shutter, AV multe, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360 mistallation, IPSX certified*	Fully sealed optical system, Interchangeable lens options, Powered zoom, Focus and lens shift, Lens memory, Integrated camera for colour calibration, 4K enhancement, 360° installation, Edge blending, Portrait projection, Epson Projector Professional Tool. Also available in white (EB-L30002U)	Automatic keystone correction, Built-in speaker, Game mode, Horizontal and vertical keystone correction, Long lam life, Quick Corner, Kensington lock	correction, Built-in speaker, Game	3D depth adjustment, Fr interpolation, Quick Corr Kensington lock
Noise (dB) normal / eco	45 / 37	45 / 37	49 / 41	36 / 28	36 / 28	32 / 24
/eight (kg)	24.4	24.4	63.8	4.1	4.1	6.6
imensions exc. feet V x D x H mm)	586 x 492 x 185	586 x 492 x 185	790 x 710 x 299	333 x 275 x 131	333 x 275 x 131	410 x 310 x 157
ower consumption ormal / eco	1301W / 899W	1301W / 899W	2,325W / 1,511W	301W / 231W	301W / 231W	368W / 280W
ower consumption tandby, comm. off	0.5W	0.5W	0.5W	0.4W	0.4W	0.5W
	N/A	N/A	N/A	N/A	N/A	N/A
CO Certified						
CO Certified tandard interchangeable ens included	N/A	N/A	N/A	N/A	N/A	N/A

		Home			Н	ome	
Model	EH-TW7100	EH-LS300B	EH-LS300W	EH-LS800W	EH-LS800B	EH-TW9400	EH-LS11000W
		090					
Resolution	4K PRO-UHD	Full HD 1080p	Full HD 1080p	4K PRO-UHD	4K PRO-UHD	4K PRO-UHD	4K (3840*2160)
Native aspect	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Colour Light Output (lumens) normal / eco	3,000 / 2,000	3,600 / 1,800	3,600 / 1,800	4,000 / 2,000	4,000 / 2,000	2,600 in normal	2,500 / 1,000
Contrast ratio	100,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	1,200,000:1	2,500,000:1
Lightsource	Lamp	Laser	Laser	Laser	Laser	Lamp	Laser
Lightsource life (hours) normal / eco	3,500 / 5,000	20,000 / 20,000	20,000 / 20,000	20,000 / 20,000	20,000 / 20,000	2,400 / N/A	20,000 / 20,000
Throw ratio in native aspect	1.32 - 2.15:1	0.26:1	0.26:1	0.16 - 0.40:1	0.16 - 0.40:1	1.35 - 2.84:1	1.35 - 2.84:1
Scalable image size (diagonal)	40 - 500"	61 - 120"	61 - 120"	80 - 150"	80 - 150"	30 - 300"	50 - 300"
Zoom	Optical x1.62	Fixed	Fixed	Digital x2.5	Digital x2.5	Motorised optical x2.1	Motorised optical x2.1
Vertical keystone Horizontal keystone	Manual ±30° Manual ±30°	N/A	N/A	4 points correction, 8 points correction, 33 x 33 points correction	4 points correction, 8 points correction, 33 x 33 points correction	Manual ±30° N/A	Manual ± 30 Manual ± 30
Lens shift	± 60% Vertical ± 24% Horizontal	N/A	N/A	N/A	N/A	Powered ± 96.3% Vertical Powered ± 47.1% Horizontal	Powered ± 96.3 vertical Powered ± 47.1 horizonta
Speaker output	10W	Sound by YAMAHA x2 speakers, x1 woofer total of 20W	Sound by YAMAHA x2 speakers, x1 woofer total of 20W	Sound by YAMAHA 2.1ch 20W	Sound by YAMAHA 2.1ch 20W	N/A	N/A
Connectivity	HDMI in (x2), USB 2.0 Type A x2, USB 2.0 Type Mini-B	HDMI x 2 (1 x ARC), 1.1 Type A, 2.0 Type Mini-B	HDMI x 2 (1 x ARC), 1.1 Type A, 2.0 Type Mini-B	USB 2.0-A (3x), USB 2.0 Type Mini-B (Service Only), Wireless LAN IEEE 802.11a/h/g/n/ac, Jack plug out, Bluetooth, HDMI ARC, HDMI (HDCP 2.3) (3x)	USB 2.0-A (3x), USB 2.0 Type Mini-B (Service Only), Wireless LAN IEEE 802.11a/b/g/n/ac, Jack plug out, Bluetooth, HDMI ARC, HDMI (HDCP 2.3) (3x)	VGA in, HDMI x2 (HDMI 1 - HDCP2.2 and 1.4), USB Type A, USB Type B, RS-232C, Trigger out	USB 1.1 Type A (2x), USB Type Mini-B, RS-232C, Ethernet interface (100 Bas / 10 Base-T), Trigger out, H ARC, HDMI (HDCP 2.3) (2)
Audio connectivity	Stereo mini jack, AtpX Bluetooth (SCMS-T)	AtpX Bluetooth (SCMS-T) via Android TV device	AtpX Bluetooth (SCMS-T) via Android TV device	HDMI ARC, Stereo mini jack, Bluetooth via Android TV	HDMI ARC, Stereo mini jack, Bluetooth via Android TV	N/A	N/A
Networking	Wireless LAN adapter - sold separately	Via Android TV device	Via Android TV device	Via Android TV device	Via Android TV device	Wireless LAN adapter - sold separately	Wireless LAN adapter - sold separately
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android	N/A	N/A	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android	N/A
Other features	3D depth adjustment, Frame interpolation, Ouick corner, Kensington lock	Android TV, Chromecast built-in via Android TV device, Google Assistant via Android TV device, Coccera adjustment, 4K input support, Direct power on/ off, Horne screen	Android TV, Chromecast built-in via Android TV device, Google Assistant via Android TV device, Corner adjustment, 4K input support, Direct power on/off, Home screen	4K enhancement, Android TV, Auto Power On, Auto source search, Built-in speaker, Chromecast, Digital zoom, Frame interpolation, Long light source life, Quick Corner, Kensington lock, Sound by Yamaha	4K enhancement, Android TV, Auto Power On, Auto source search, Bullt-in speaker, Chromecast, Digital zoom, Frame interpolation, Long light source life, Quick Corner, Kensington lock, Sound by Yamaha	ISF Calibration, Powered zoom / focus / lens shift, 4K enhancement, HDR and UHD BD support, Lens position memory (x10), Active 3D, Picture-in-picture, Frame interpolation, Super resolution, Detail enhancement, 2D to 3D conversion, Kensington lock, Wireless LAN security	4K enhancement, A/V mute, Digital zoom, Fran interpolation, Horizontal vertical keystone correct Instant on/off, Lens positi memory, Long light sour life, Super resolution
Noise (dB) normal / eco	32 / 24	37 / 23	37 / 23	32 / 19	32 / 19	31 / 20	30 / 22
Weight (kg)	6.9	7.2	7.2	12.3	12.3	11.2	12.7
Dimensions exc. feet (W x D x H mm)	410 x 310 x 157	467 x 400 x 149	467 x 400 x 149	695 x 341 x 156	695 x 341 x 156	520 x 450 x 193	520 x 192.70 x 447
Power consumption normal / eco	387W / 297W	278W / 179W	278W / 179W	350W / 217W	350W / 217W	355W / 271W	302W / 198W
Power consumption standby, comm. off	0.5W	2W	2W	2W	2W	0.35W	0.4W
,	N/A	N/A	N/A	N/A	N/A	N/A	N/A
TCO Certified							
TCO Certified Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A	N/A

	Home
Model	EH-LS12000B
Resolution	4K (3840*2160)
Native aspect	16:9
Colour Light Output (lumens) normal / eco	2,700 / 1,000
Contrast ratio	2,500,000:1
Lightsource	Laser
Lightsource life (hours) normal / eco	20,000 / 20,000
Throw ratio in native aspect	1.35 - 2.84:1
Scalable image size (diagonal)	50 - 300"
Zoom	Motorised optical x2.1
Vertical keystone Horizontal keystone	Manual ± 30 Manual ± 30
Lens shift	Powered ± 96.3 vertical Powered ± 47.1 horizontal
Speaker output	N/A
Connectivity	USB 1.1 Type A (2x), USB 2.0 Type Mini-B, RS-232C, Ethernet interface (100 Base-TX / 10 Base-T), Trigger out, HDMI ARC, HDMI (HDCP 2.3) (2x)
Audio connectivity	N/A
Networking	Wireless LAN adapter - sold separately
Epson software solutions	N/A
Other features	4K enhancement, A/V mute, Digital zoom, Frame interpolation, Horizontal and vertical keystone correction ISF certification, Instant orV off, Lens position memory, Long light source life, Quick Corner, Super resolution
Noise (dB) normal / eco	30 / 22
Weight (kg)	12.7



Laser projection TV EpiqVision Mini EF-11/EF-12

Project in any direction and on to almost any surface with Epson's smallest laser projectors. These mini laser projectors are sleek and sophisticated in design, are easy to use and come with a range of connectivity solutions.

Epson's smallest consumer laser projector range

Modern and contemporary design

High colour light output of up to 1,000 lumens

Laser light source provides up to 10 years of entertainment¹

Project in any direction

EF-11



EF-12



Remote control to match the stylish look

Smart home entertainment²

Built-in speaker

Premium sound by YAMAHA (EF-12 only)

5 year warranty³

Android TV^TM Google, Android, YouTube, Android TV and other marks are trademarks of Google LLC. Subscriptions may be required for certain content providers.

520 x 192.70 x 447 302W / 198W 0.4W

60 months / 12,000hrs

N/A

¹ Based on watching content for five hours every day with the projector on Eco mode.
² Miracast built-in (EF-11); Android TV, Google Assistant⁶ and Chromecast built-in⁷ (EF-12).

³ 5 years or 12,000 hours, whichever comes first.

Model specific options



Ultra short throw and short throw wall mounts

ELPMB62 for the EB-1485Fi, EB-760W, EB-760Wi, EB-770F, EB-770Fi, EB-775F, EB-800F and EB-805F.

ELPMB45 or ELPMB64 for the EB-L210SW and EB-L210SF



ELPEC01 Camera unit

Optional external camera module designed for the EB-PU Series and ELPLX Series ultra-shortthrow lenses.



ELPAF63 External air filter

Optional external air filter designed for the EB-PU1000 Series. This filter extends the dust resistance and minimises maintenance intervals, even when used in high dust environments.



ELPFT01 for the EB-1485Fi, EB-760Wi and EB-770Fi.



Finger Touch Unit bracket

ELPMB63 for attaching the ELPFT01 directly to the wall - optional usage depending on installation.



ELPMB52, ELPMB59 Stacking frames

Specialist frames designed by LANG AG for the EB-PU to EB-L30000U products for portrait projection and projector stacking.

Complementary solutions

Wireless presentation systems



ELPWP10 / ELPWP20

Epson's new wireless presentation systems make it easy for you to share your screen and increase your productivity.

Automatic start-up

Epson display solutions automatically turn on when the transmitter is plugged into a laptop.

Receiver functionality

The receiver functionality can be integrated with Epson display solutions* reducing your initial costs (ELPWP10 only).

Intuitive design

It's simple enough that anyone can use it without training. Sharing your screen, swapping to a different device or sharing up to four devices simultaneously is as simple as a click of a button.





Plug into a laptop



2 button



3 Collaborate on the big screen

Document cameras



ELPDC30 Desktop Visualiser

13M pixel camera (4k)
Up to 60 frames per second
A3 shooting area
4K UHD images via HDMI/Miracast
10x optical/23x digital zoom
Kensington lock security
Built-in, easy-to-use carry handle



ELPDC21 Desktop Visualiser

2M pixel camera (1920 x 1080)
Up to 30 frames per second
A3 shooting area
Built-in LED lights
Supports parallel video output and Split screen
functionality
1080p images via VGA, HDMI,
USB outputs
12x optical/10x digital zoom
Enhanced security with Kensington lock and
security bar



ELPDC13 Desktop Visualiser 2M pixel camera (1920 x 1080)

Up to 30 frames per second
A3 shooting area
Built-in LED lights
Supports parallel video output and Split screen
functionality
1080p images via VGA, HDMI,
USB outputs
16x digital zoom
Enhanced security with Kensington lock and
security bar



ELPDC07 Portable Visualiser

2M pixel camera (1920 x 1080)
Up to 30 frames per second
A3 shooting area
Built-in LED lights
USB powered
8x digital zoom

Options



ELPAP10/ELPAP11 Wireless LAN adapter

Upgrade the connectivity of your compatible Epson display solution with this easy-to-install wireless LAN adapter (please check product specifications for compatibility).



ELPCB03 Control and Connection Box

Epson's tailor-made Control and Connection Box is designed to meet the needs of education users. It offers a neat and tidy cable management solution, and is compatible with the Epson education classroom projectors that feature up to 3 x HDMI inputs and an RS232C connection. With large, clearly marked buttons to match those on Epson's projectors, ease of use is assured, allowing presenters to quickly power on and adjust source and volume. Compatible with Epson's 3-in-1 USB Display, the USB signal is also boosted to extend up to 10m.



ELPSP02 External speakers

An optional extra fully compatible with Epson's Control and Connection Box, the ELPSP02 speakers offer powerful 2 x 15W stereo audio support, for perfect clarity even in larger rooms.



ELPSC21 80" Mobile 16:9 screen

80 inch portable screen

16:9 aspect ratio perfect for 1080p gaming and movies

Less than 4kg, with included carry case

Easy set up

ELPSC32 50" 4:3 Desktop screen

50 inch pull out screen

4:3 aspect ratio for presentations - ideal for SVGA and XGA projectors

Quick set up for desktop usage

Perfect for travelling presenters – weighs just 3kg

EB-PU1000 Series lens options

Lenstype		Ultra-short-throw	Short throw	Short throw	Wide throw	Mid throw	Mid throw	Mid throw	Mid throw	Long throw
Model name		ELPLX01S/LX01WS	ELPLU03S	ELPLU04	ELPLW05	ELPLM08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Part code		V12H004X0A/ V12H004Y0A	V12H004UA3	V12H004U04	V12H004W05	V12H004M08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Focus / zoom type		Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised
Zoom ratio (optical)		N/A	1.2x	1.2x	1.4x	1.6x	1.6x	1.5x	1.5x	1.4x
Throw ratio										
Aspect ratio										
WUXGA models 16:10, 16:9	16:10, 16:9	0.35:1	0.65 - 0.78:1	0.87 - 1.05:1	1.04 - 1.46:1	1.44 - 2.32:1	2.16 - 3.48:1	3.32 - 5.06:1	4.85 - 7.38:1	7.21 - 10.11:1
F number		1.9	2.0 – 2.26	2.0-2.1	2.0 – 2.22	1.65 – 2.27	1.8 – 2.51	1.84 – 2.4	1.81 – 2.34	1.8 - 2.45
Focal length		5.8mm	11.1mm - 13.1mm	14.8mm x 17.7mm	17.6mm - 24.3mm	24.0mm - 38.2mm	36mm - 57.4mm	55.4mm - 83.3mm	80.6mm - 121.1mm	119mm - 165.4mm
Screen size range										
All models		100 - 1000 inch	80 - 1000 inch	50 – 1000 inch	50 – 1000 inch					
Powered lens shift										
WUXGA models Vertical/Horizontal +17% / ±	Vertical/Horizontal	+17% / ± 10% max	±67% / ±30% max	±67%/±30% max	±67% / ±30% max	±67% / ±30% max	±67% / ±30% max	±67%/±30% max	±67% / ±30% max	±67% / ±30% max
Weight		3.5 Kg	2.3 Kg	3.1 Kg	1.45 Kg	1.2 Kg	1.9 Kg	2.2 Kg	2.2 Kg	2.2 Kg

Epson's throw distance simulator can help you determine the optimal projector distance and screen size, visit support.epson-europe.com/TDS

40

EB-PU2000 Series lens options

Lens type		Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Long throw
Model name		ELPLX02S/LX02WS	ELPLU03S	ELPLU04	ELPLW05	ELPLW08	ELPLW06	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Part code		V12H004X0B/ V12H004Y0B	V12H004UA3	V12H004U04	V12H004W05	V12H004W08	V12H004W06	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Focus / zoom type	0	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised
Zoom ratio (optical)	al)	N/A	1.2×	1.2x	1.4x	1.4x	1.37×	1.6x	1.5x	1.5x	1.4x
Throw ratio											
Aspect ratio											
WUXGA models	16:10, 16:9	0.35:1	0.48 - 0.57:1	0.64 - 0.77:1	0.77 - 1.07:1	0.86 – 1.2:1	1.19 – 1.62:1	1.57 - 2.56:1	2.42 - 3.71:1	3.54 – 5.41:1	5.27 – 7.41:1
F number		1.9	2.0 – 2.26	2.0 – 2.1	2.0 – 2.22	2.0 - 2.22	1.8 – 2.26	1.8 – 2.35	1.81 – 2.4	1.81 – 2.34	1.8 – 2.45
Focal length		8.0mm	11.1mm - 13.1mm	14.8mm – 17.7mm	17.6mm – 24.3mm	19.7mm – 27.5mm	27.3mm – 37.0mm	36mm – 57.4mm	55.4mm - 83.3mm	80.6mm - 121.1mm	119mm –165.4mm
Screen size range											
All models		100 – 1000 inch	80 – 1000 inch	60 – 1000 inch	60 – 1000 inch	60 – 1000 inch	60 – 1000 inch				
Lens shift											
WUXGA models	Vertical/Horizontal	+25% / ±15%	±24%/±10%	±60%/±18%	±24% / ±10%	±60% / ±18%	±60% / ±18%	±60% / ±18%	±60% / ±18%	±60%/±18%	±60%/±18%
Weight		5.0 Kg	2.3 Kg	3.1 Kg	1.45 Kg	3.1 Kg	2.95 Kg	1.9 Kg	2.2 Kg	2.2 Kg	2.2 Kg
:						-			į		

Epson's throw distance simulator can help you determine the optimal projector distance and screen size, visit support.epson-europe.com/TDS ELPLW05 brightness is limited to maximum 12,000 lumens.

EB-L30000U lens options

Lens type		Ultra-short-throw	Rear projection	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Long throw	Long throw
		ELPLX03	ELPLR05	ELPLU05	ELPLW07	ELPLM12	ELPLM13	ELPLM14	ELPLL09	ELPLL10
		V12H004X03	V12H004R05	V12H004U05	V12H004W07	V12H004M0C	V12H004M0D	V12H004M0E	V12H004L09	V12H004L0A
	90	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised	Motorised
	;al)	N/A	K/N	1.21×	1.37x	1.35x	1.52x	1.50x	1.50x	1.50x
Throw ratio										
Aspect ratio										
	16:10, 16:9	0.35:1	0.63:1	0.90 - 1.09:1	1.29 - 1.76:1	1.74 - 2.35:1	2.28 - 3.46:1	3.41 - 5.12:1	4.79 - 7.20:1	6.96 - 10.45:1
		2.2	2.2	2.4 - 2.6	2.2 - 2.5	1.9 - 2.1	1.9 - 2.4	1.9 - 2.4	2.1 - 2.5	2.2 - 2.6
		11.16mm	19.1mm	28.4mm - 34.0mm	40.6mm - 55.2mm	54.7mm - 73.0mm	71.6mm - 107.3mm	104.8mm - 156.9mm	149.7 mm - 225.0mm	216.6mm - 326.8mm
Screen size range	0									
		120 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch	100 - 1000 inch
Lens shift										
	Vertical/Horizontal	±25% / ±15% max	±15% / ±5% max	±55% / ±25% max	±65% / ±30% max	±65% / ±30% max	±65% / ±30% max	±65% / ±30% max	±55% / ±25% max	±55% / ±25% max
		13 Kg	9.4 Kg	9.7 Kg	9.4 Kg	7.2 Kg	9.5 Kg	9.5 Kg	9.2 Kg	10.5 Kg

Glossary and features

Look out for additional features that further improve the user experience. Features are specific to particular models – please check individual product specifications for details.

Auto calibration

Epson's interactive projectors offer the ability to automatically calibrate the interactive surface area. With just a couple of clicks an interactive workspace can be calibrated without needing to perform a lengthy manual process.

Auto lamp dimming

This feature automatically adjusts the brightness of the projector according to either the ambient light conditions or the content of the projected image.

Auto screen fit

This feature allows a projector to be roughly set up in front of a framed screen, and with a simple press of the 'Screen Fit' button, the image is aligned perfectly to the screen borders for quick and easy set up.

Colour calibration

Keep images consistent and maintenance to a minimum using the built-in or optional camera. The camera detects image colours that have become uneven over time, detects subtle inconsistencies between multiple projectors and enables automatic colour correction.

Constant brightness mode

The constant brightness mode maintains the projector's brightness at a specified level for up to 97,000 hours, helping to ensure the longevity of the light source.

Contrast ratio

Epson's throw distance simulator can help you determine the optimal projector distance and screen size, visit support.epson-europe.com/TDS

The degree of difference between the lightest and darkest areas of the projected image. A high contrast ratio is particularly important for home cinema projectors.

Copy OSD settings

A feature that allows the cloning of the projectors OSD menu settings like user logo and colour mode via a USB thumb drive or USB-B cable, to transfer to other compatible projectors in the environment.

Curved surface and corner wall correction

Enhanced geometric correction capability allowing large images to be wrapped around curved surfaces or corners, creating engaging displays in innovative spaces.

Detail enhancement

Improve perceived detail with processing that enhances the contrast and texture of content.

DICOM simulation

This dedicated colour mode is designed to show off the best greyscale range – perfect for viewing medical images such as X-rays (cannot be used for diagnostic purposes).

Edge blending

Built-in ability to use multiple projectors vertically or horizontally for one giant image. Edge blending manages the overlaps between projectors to produce seamless large scale images.

Focus help

An easy to use built-in test pattern that enables the focus to be perfectly adjusted in seconds.

Frame interpolation

Video processing technology that inserts additional frames between the original ones to produce a smoother and sharper playback – particularly important for fast-moving action sequences in high definition movie content.

High dynamic range (HDR)

HDR presents the optimal visual experience by increasing the contrast ratio to deliver a far greater range between the darkest and lightest areas of the screen. It gives images more depth and allows you to see incredible detail that's previously not been possible. It enriches colours making images feel more natural yet intense, and ultimately, more immersive.

Keystone correction

A digital image adjustment used to realign the image when projected at an angle to the screen, producing a rectangular image rather than a 'keystone' shape. On some models this is available for horizontal correction as well as vertical, while more advanced models have the ability to make these corrections automatically.

Lens position memory

Specific lens positions can be stored in the projector memory, including lens shift positions, focus and projection sizes, allowing you to quickly adjust the projector depending on the aspect ratio of the content.

Lens shift

A feature of high-end products, this is a physical adjustment of the lens position to allow an image to be moved horizontally or vertically with no loss of image quality, perfect for easy installation.

MHL

Mobile High-Definition Link is a connectivity technology that enables you to easily share your content directly from a compatible smartphone or tablet and is capable of charging the device at the same time.

Multi location interactivity

This feature allows up to four projectors to be connected using iProjection for PCs, with content and interactivity shared across all users. This means that people in different locations can collaborate on the same content remotely.

PC-free presentation

Display files from USB memory without the need for a laptop and cables. Compatible file formats vary by projector.

Picture-in-picture

Display one source in full screen, whilst showing a secondary source as a smaller inset picture.

Point and arc correction

Geometric correction that enables small corrections to be made for screens that are uneven in places or slightly curved – perfect for large scale installations.

Portrait projection

Allows projection of portrait orientated images by placing the projector on its side (please note, a different lamp set may be required for this feature).

QR code function

Display an on-screen QR code to easily connect wirelessly via iProjection.

Real time keystone correction

Keeps the image perfectly aligned by constantly monitoring the projector's positioning and maintaining a rectangular image in real time.

Resolution and aspect ratio

The native resolution is the number of distinct pixels in each dimension that can be displayed. This is stated as the number of columns and rows of pixels creating the display e.g. $1920 \times 1080 (1080p)$. The greater the resolution, the greater the detail and sharpness of the projected image. The ratio of horizontal to vertical lines also gives the native aspect ratio. In this instance 1920×1080 equates to a native aspect ratio of 16:9. It is best to match the input signal resolution to the projector's output resolution where possible to achieve the best image.

Schedule function

Built-in schedule management that allows timer setting of many projector functions, without the need to be connected to a PC or network – perfect for events and staging.

Screen Mirroring (Miracast)

Easy wireless transmission of Full HD (1080p) video and sound from compatible smartphones, tablets or PCs.

Screen sharing

Content can be shared between displays on the same network, promoting higher engagement and collaboration without the need for additional software.

Up to four projectors can be connected, with everyone viewing the content at the same time as other Epson displays (selected models only).

Split screen

This feature enables content from two different sources to be played simultaneously, with one image larger than the other or both of equal size.

Super resolution

Image processing that upscales standard definition content to produce a sharper and more detailed output image.

Throw ratio

The projection distance divided by the width of the projected image. A smaller throw ratio will enable large projection sizes from a shorter distance. The range of throw ratios for any given projector will also depend on the range of its zoom capability.

USB display

3-in-1 USB display enables simple plug-andplay capability. One USB cable can be used for image, audio and control. This saves time when making a connection, as the computer image should automatically be displayed, and prevents the need for multiple cables.

Warranty

To ensure customer satisfaction and complete peace of mind, Epson boast a market leading service organisation. All business and home cinema projectors in this guide are covered by a minimum of two years hardware and one year lamp warranty. For exact details of each model and to see options for warranty extension please visit www.epson.eu/warranty

Web-based control (with smart device support)

Use a computer web browser or smart device to adjust projector settings. The newly designed OSD Control Pad function allows control of the OSD menu and shows a representation of the lens-shift range that is available.

For further information please contact your local Epson office or visit www.epson.eu/contact-us Algeria +213 770 938 617 Austria 01 253 49 78 333 Belgium +32 (0)2 792 04 47 Czech +420 246 037 281 Denmark 44 50 85 85 East Africa (+254) 734 354 075 Finland 0201 552 091 France 09 74 75 04 04 (Cost of local call, operator charges may apply Germany +49 (0) 2159/92 79 500 Greece (0030) 211 198 62 12 Hungary 06800 147 83 Ireland 01 436 7742 Israel (+972)-3-5751833 Italy 02-660321 10 (0,12 €/min) Luxembourg +352 27860692 Middle East +9714 2677638 Morocco +212 520 134 040 Netherlands +31 (0)20 708 5099 Norway +47 67 11 37 00 Poland +48 22 295 37 25 (0,16 2½/min) Portugal 707 222 111 Romania 0040 214025024 Russia (095) 777-03-55 Slovakia +421 232 786 682 Southern Africa +27 (0) 10 109 5320 Spain 93 582 15 00 Sweden +46 8 5051 3701 (Mobilisamtal – 0,99 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,99 kr/min Switzerland 022 592 7923 Tunisia +216 9811 5564 Turkey (0212) 3360303 United Kingdom 087 14 237766 (+10p per minute plus network extras) West Africa (+234)8020727843

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners. Product information is subject to change without prior notice.









Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners. Product information is subject to change without prior notice.

¹ 2001 to 2020, 500-lumen and above, excluding screenless TVs, Futuresource Consulting – Quarterly Projector Market Insights – Worldwide Analyzer CY20Q4.

- ² Colour brightness (colour light output) in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. Top-selling Epson SLCD projectors versus top-selling 1-chip DLP projectors based on NPD sales data for October 2019 through September 2020.
- ³ Depending on product, please check specifications on pages 10-33.
- ⁴ Epson achieved certification by TCO Certified for selected families of projectors. TCO Certified is the world's most comprehensive sustainability certification for IT products, which must meet life cycle criteria for social and environmental sustainability. For more information, please visit https://tcocertified.com.
- ⁵ 4K Enhancement Technology shifts each pixel diagonally to double Full HD resolution. Resolution is Full HD in 3D Mode.
- ⁶ Google Search function is worldwide. Google Search cannot communicate the Smart solution with Google Home. Google Assistant is not available in certain languages and countries.
- ⁷ Casting optimised for selected services only. Streaming quality for other content may vary. Supported operating systems and devices: Android 2.3 and higher IOS® 7 and higher, Windows® 7 and higher, Mac OS® 7 and higher and Chromo OS (version 38 or higher).

