


NEC MultiSync® UN552S  
LCD 55" Video Wall Display

## Datasheet

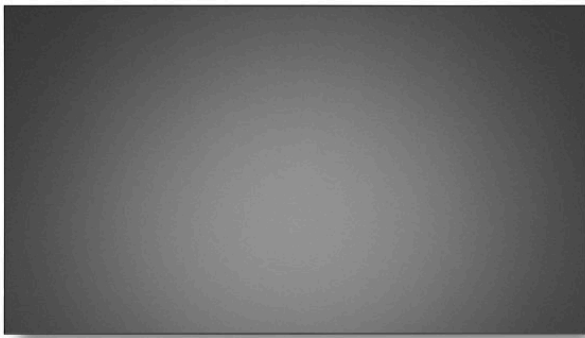

### Bring your walls to life

For the most engaging and creative visual experiences, the 55" MultiSync® UN552S video wall display offers better image quality, easier installation and a reliable longer-lasting performance.

Installation and operation becomes so simple as powerful calibration capabilities provide compelling picture performance throughout the display's entire lifetime. Tune picture attributes according to your specific application needs and create a single image across multiple displays. With a combined adjoining bezel of just 0.88mm, the holistic video wall experience offers an expansive digital canvas with barely noticeable interruption. The 700cd/m<sup>2</sup> display brightness and an anti-glare surface delivers the best readability with no annoying reflections even in bright ambient light conditions.

Attracting shoppers in retail malls, entertaining museum-goers or presenting menu choices, these large modular displays, in different shapes and formations, get your content noticed.

### Benefits

**Easy installation** - effortlessly set up your wall display with Auto TileMatrix and out-of-the-box calibrations. Save time by plugging in ready-to-use image presets for predefined application scenarios.

**Enhanced imaging performance** - advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

**Secure Reliability and Longevity of Video Walls** - unique NEC heat management system enables the user to monitor and control the heat inside the display.

**Lifelike and consistent colour** - expect colour reproduction that feels true to life with IPS panel technology, the top choice when it comes to colour consistency. The S-IPS panel ensures that perfect visibility is maintained in landscape and portrait mode and at extreme viewing angles as viewers pass by.

**Smart media integration** - seamlessly integrate the media source of your choice into the video wall display. Use the wide range of NEC's OPS Slot-in PCs, and Raspberry Pi compute modules, for content feed and computing.

## Product Information

Product Name	NEC MultiSync® UN552S
Product Group	LCD 55" Video Wall Display
Order Code	60004523

## Display

Panel Technology	S-IPS with Direct LED backlights
Active Screen Area (W x H) [mm]	1,209.63 x 680.34
Screen Size [inch/cm]	55 / 138.8
Aspect Ratio	16:9
Pixel Pitch [mm]	0.630
Brightness [cd/m <sup>2</sup> ]	700
Contrast Ratio (default)	> 1700:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Gamut	72% of NTSC
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Landscape; Portrait

## Resolution

Native Resolution	1920 x 1080			
Supported on DisplayPort and HDMI	1024 x 768; 1080i; 1080p;	1280 x 1024; 1280 x 768; 1360 x 768;	1600 x 1200; 1920 x 1080; 3840 x 2160;	640 x 480; 720p (50/60 Hz); 800 x 600
Supported on HDMI only	1080i (50/60 Hz)			

## Synchronisation Rate

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

## Connectivity

Input Video Analogue	1 x VGA; Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x Remote Control (3.5 mm jack); 1 x RS232; 2 x LAN 100Mbit
Input Data	1 x microSD (MediaPlayer); 1 x USB 1.0 (Downstream); 1 x USB 1.0 (MediaPlayer); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, MediaPlayer)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	LAN 100Mbit

## Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSVSENSOR3; White Copy (post self-calibration)

Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; Update Uniformity Correction; White Point
---------------------------	---

Calibration Software	NEC Display Wall Calibrator
----------------------	-----------------------------

## Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
----------	--

OPS Max. Current / Power Consumption [A / W]	3.6 / 58
--	----------

Compute Module Slot	Slot Technology: Compute Module 3 Slot (NEC proprietary standard)
---------------------	---

## Sensors

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
--------------	--

Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
--------------------	---

NFC Sensor	Integrated, 2cm range, free NEC Android App required
------------	--

## Electrical

Power Consumption [W]	165 shipping; 420 (max.)
-----------------------	--------------------------

Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
------------------------	--------------------------------

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
----------------------------	-----------

Operating Humidity [%]	20 to 80
------------------------	----------

Storage Humidity [%]	10 to 90
----------------------	----------

Storage Temperature [°C]	-20 to 60
--------------------------	-----------

## Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,210.5 x 681.2 x 98.6
-----------------------------	---------------------------------------

Weight [kg]	Without stand: 25.8
-------------	---------------------

Bezel Width [mm]	0.44 bottom/right; 0.44 top/left; 0.88
------------------	--

VESA Mounting [mm]	4 holes; 400 x 400 (FDMI); M6
--------------------	-------------------------------

## MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
-------------------------	--

Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
-------------------------	---

Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling
-------------------------	---

## Available Options

Accessories	Calibration kit (KT-LFD-CC2); Feet (ST-5220); Remote control kit (KT-RC3); Speaker (SP-RM3); Wall mount (PD04VWM MFS 46-55 L/P; PD04VW QR 46-55 L/P; CK02XUN MFS 55 L/P)
-------------	--

Compute Module Slot	Raspberry Pi Compute Module 1 and 3
---------------------	-------------------------------------

OPS Slot	Intel® Atom, Celeron and Core i3, i5, i7 Slot-in PCs
----------	--

## Green Features

Energy Efficiency	Carbon savings meter; Energy consumption: 209 kWh/1000 h; Energy efficiency class: G; Human Sensor; LED backlight
-------------------	---

## Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; PJLink Support; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI
Pixel Failure Class	ISO 9241-307, Class 2
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; LAN cable (RJ45); Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension <sup>1</sup>
Operating Hours	24/7

<sup>1</sup> please refer to terms and conditions of warranty extensions



CE



VCCI



RCM



TÜV GS



RoHS

This document is © 2024 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 20.02.2024