




LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #1156-CH-CL-MWP

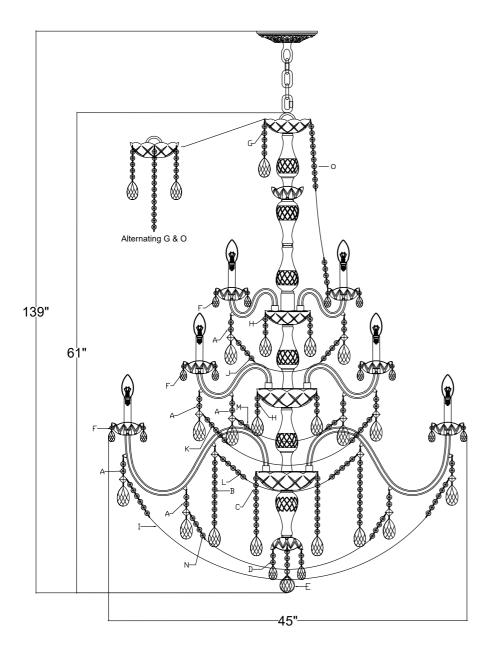

## Crystal Sets

A. 45 Sets. (2)14mm + (1) Square + AS9-2.5"

B. 10 Sets. (1)Square + (10)14mm + AS9-2.5"

C. 10 Sets. (9)14mm + AS9-2.5" D. 5 Sets. (2)14mm + AS9-2"

E. 1 Piece. (4)14mm + AS8-50mm Ball

F. 100 Sets. (1)14mm + AS9-2" G. 5 Sets. (5)14mm + AS9-2.5" H. 20 Sets. (3)14mm + AS9-2.5"

(20)14mm 1. 10 Sets. J. 5 Sets. (11)14mm K. 10 Sets. (12)14mm L. 10 Sets. (9)14mm M. 10 Sets. (6)14mm N. 10 Sets. (12)14mm O. 5 Sets. (25)14mm

MARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm.For more information go to www.p65warnings.ca.gov



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate

local electrical codes,



You will need 25- Candelabra Base Bulb 40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

## **HOW TO INSTALL:**

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. To install the 6"arms, slightly loosen each screw on the metal plate.

Pull a female plug through a hole in the upper metal plate.

Connect the male plug at the end of the upper arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate).

Twist the metal tab counter-clock wise until both inserts lock onto the loose screws.

Tighten the screw securing the arm in place. Repeat for all 6"arms.

- 2. Repeat Step 1 for the 12" and 18" arms. The 12" arms attaches on the middle tier and the 18" arms attaches on the bottom-most tier.
- 3. Place the bottom bowl, metal washer, check ring, in that order, over the bottom distributor box. Secure with the coupling.
- 4. Place the thread pipe, glass vase, check ring, metal washer, bottom bobeche, metal washer in that order, secure with the Finial.
- 5. Screw the Center column kit 1 onto the center column kit 2.
- 6. Attach the mounting bar onto the outlet box.
- 7. Decide the desired hanging height and adjust the chain to the correct length.
- 8. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- 9. Dress the crystals as illustrated.





LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #1156-CH-CL-MWP

