



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #604-MK_CEILING

Hanging

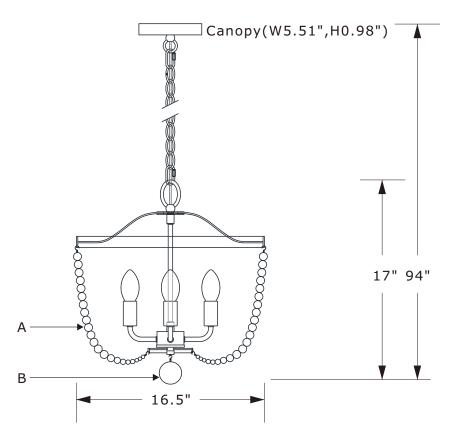

Ceiling

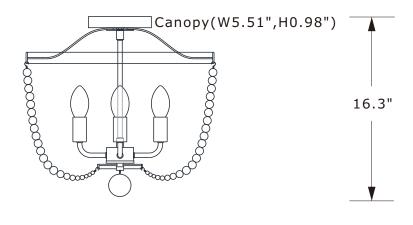



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 4-Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

This fixture is DAMP rated

How to install

For hanging:

- 1.Do a complete inventory of all parts and components before you start installation.
- 2. Attach the center stem assembly onto the light cluster.
- 3. Attach the other end of the center stem onto the swivel. Attach the bottom ring onto the bottom of cluster. Secure it with Drop "B".
- 4.Dress the fixture with beads "A" as illustrated.

For ceiling:

- 1.Repeat step#1-3 above.
- 2.Remove the fixture loop and attach the canopy onto the top of fixture. Secure it with hex nut.

Bead Sets

A.40 Sets.

(14)18mm + (1)16mm +

(1)14mm + (1)12mm +

(2)10mm + (3)8mm


B.1 Set.

(1)50mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PART NUMBER MODEL #604-MK_CEILING

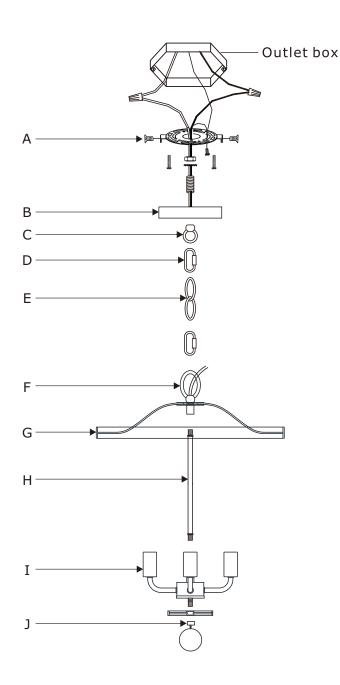

Part Number

- A. (1) Mounting Hardware
- B. (1) Canopy(W5.51",H0.98") #XRE604MKCAN5.51IN
- C. (1) Fixture Loop1
- D. (2) Quick Link
- E. (1) Hanging Chain(72",4mm) #XRE603MKCHA4MM
- F. (1) Fixture Loop2
- G. (1) Top Banding Frame
- H. (1) Center Stem(9.45",9.7mm)
- I. (1) Cluster
- J. (1) Finial #XRE604MKFIN