





ASSEMBLY INSTRUCTION MODEL #9224-OS

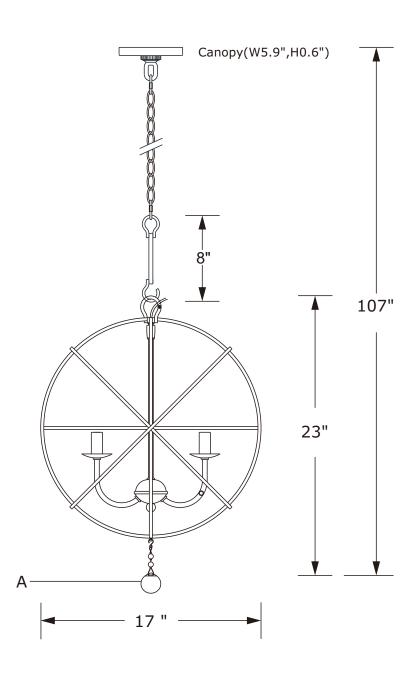



2XØ10mm+1XØ40mmBall

Electrical Danger Turn Power Off All electrical components must be installed by a licensed electrician in accordance with the National

WARNING:

Electric Code and the appropriate

local electrical codes.



You will need 5 -Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE THIS FIXTURE IS DAMP RATED

How to Install


- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Install bulbs (not included).
- 3.Install the mounting plate onto outlet box and secure it with the outlet box screws.
- 4. Take the end of the rod with a hook and attach it to the top of the fixture frame. Open a quick link and attach it to the other end of the rod (the end with a closed loop).
- 5. Thread the collar ring into the canopy.
- 6.Open the other quick link and attach it to the collar loop.
- 7.Connect fixture wires into the outlet box.
- 8.Raise the canopy onto the collar loop and secure it with the collar ring.
- 9. Attach the crystal ball "A" on the bottom of fixture.
- 10.After safely attaching fixture into outlet box, proceed to connecting the power.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.





PART NUMBER MODEL # 9224-OS

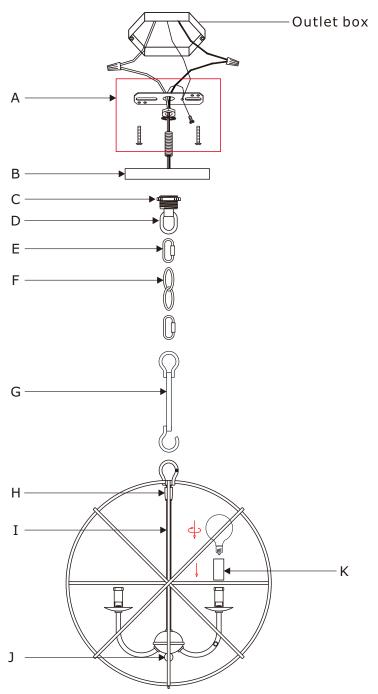

Part Number

- A.(1) Mounting Hardware
- B.(1) Canopy(W5.9", H0.6") #XRE9224OSCAN5.9IN
- C.(1) Collar Ring
- D.(1) Collar Loop
- E.(2) Quick Link
- F.(1) Hanging Chain(72",4mm) #XRE9220OSCHA4MM
- G.(1) Rod(8",9.3mm) #XRE9224OSROD8IN
- H.(1) Swivel

L

- I.(1) Center Stem(10.83",9.3mm) #XRE9224OSSTEM10.83IN
- J.(1) Final #XRE9224OSFIN
- K.(5) Candle Sleeve(W0.87",H1.97") #XRE9224OSCDL1.97IN
- L.(5) White Plastic Candle Sleeve (W0.87",H1.97") #XRE9224PCDL1.97IN