

CRYST RAMA




ASSEMBLY INSTRUCTION MODEL ADD-306-AG-AU

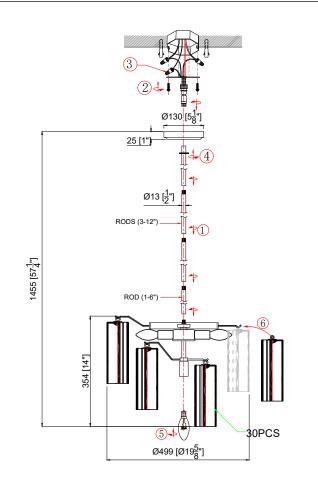

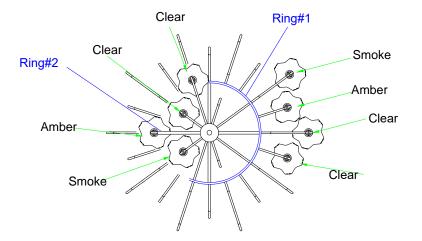

Glass Installation Steps

- 1. Dress ring #1 and ring #2, clockwise, in order of:
- (1) Smoke glass, (1) Amber glass, (1) Clear glass and (1) Clear Glass




All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.



You will need 6 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE (This fixture is Dry rated)

How to Install

- **1.** Decide the preferred hanging height and choose the correct length of rods needed.
- Feed the wires through the rods, screw collar ring and canopy(with a bigger center hole).
 Screw the rods together. Screw one end of the rod assembly onto the top of frame and the other end onto the swivel on the mounting strap
- 3. Attach the mounting strap onto the outlet box.
- **4.** Raise the fixture up to the ceiling and do the wire connections. Slip the canopy up along the rods and over the mounting strap.Secure with the screw collar ring.
- 5. Install the bulb into the socket.
- 6. Dress the glass as illustrated.

Glass Sets

1.16pcs	Clear glass 2 3/4x7 3/4"
2.8 pcs	Amber glass 2 3/4x7 3/4


3. 7 pcs Smoke glass 2 3/4x7 3/4"

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov





PART NUMBER MODEL ADD-306-AG-AU

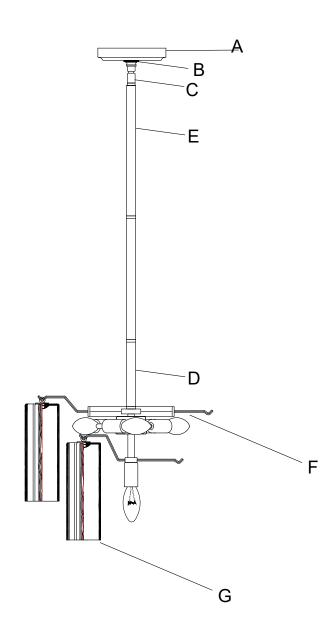

Part Number

Part Numbers

- A. (1)-Canopy,D 5 1/8XH1" (XBN300AGCAN5.125IN)
- B. (1)-Collar ring
- C. (1)-Swivel
- D. (1)-6"Rod
 - (XBN300AGROD6IN)
- E. (3)-12"Rods
 - (XBN300AGROD12IN)
- F. (1)-Frame
- G. (16)-Clear glass,D2 3/4xH7 3/4"
 - (8) -Amber glass,D2 3/4xH7 3/4"
 - (7) -Smoke glass,D2 3/4xH7 3/4"