



ASSEMBLY INSTRUCTION MODEL #FUL-905-GA



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





You will need 3 - Med.Bulb 40 Watts Recommended 60 Watts Max


USE LED BULBS FOR EXTENDED USE This fixture is dry rated

How to Install

- Optional--Remove the (4) metal bands by removing the(4)screws on top of the shade. Put the shade back using the
- Attach the canopy onto ceiling junction box and secure it with ball nut.
- Install the bulb onto the socket.
- Put the bottom ring over the fabric shade and secure it with screws.

Bulb replacement

1. Take the bottom ring off by removing screws.

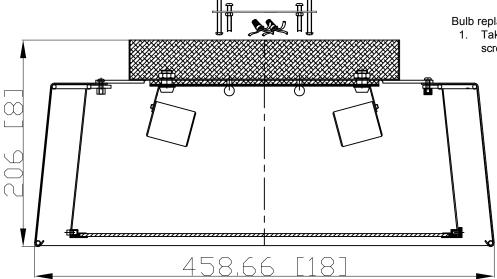

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov





LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #FUL-905-GA

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy;W10.75"*H1.25"#XAR905GACAN10.75IN
- C. (3)-Socket
- D. (1)-Fabric Shade;W18"*H6.25"#XAR905SHA18IN
- E. (3)-Bulb (Not included)
- F. (4)-Metal band #XAR905GABAND
- G. (3)-Screws
- H. (1)-Glass diffuser;Ø14.5"#XAR905DIF14.5IN
- I. (1)-Bottom ring;Ø15.25"
- J. (2)-Ball Nut #XAR905GABANUT

