






ASSEMBLY INSTRUCTION MODEL #WIN-619-GA-CL-MWP

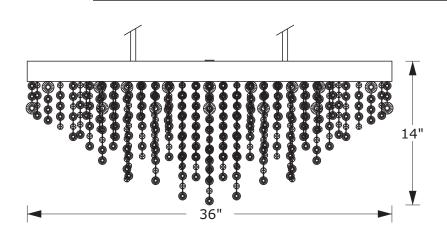

DETAILED ILLUSTRATION

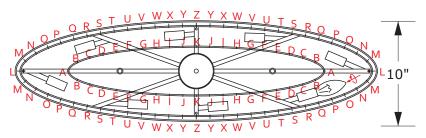

SUGGESTED CRYSTAL PLACEMENT TOP VIEW PLEASE REFERENCE CRYSTAL KEY

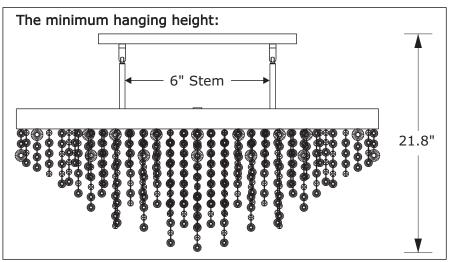



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 8 -Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE THIS FIXTURE IS DAMP RATED

How to install

- Place the mounting plate over the outlet box and mark two points on the ceiling with same distance as between the two holes on the mounting plate.
- 2.Drill the holes at the marked points then insert the anchors into the holes. Attach the mounting plate onto the wall using anchor screws.
- 3.Create two stem assemblies (12'' + 12'' + 12'' + 6''), making sure the 6'' stem is installed and located at the top.
- 4.Feed fixture wiring through one of the stem assemblies, prior to connecting.
- 5.Take the two stem assemblies and attach the lower-most rod to the fixture frame.
- 6.Attach the other side of the stem assemblies (one with the 6" rod) to the swivels.
- 7.Place the canopy over the two swivels on the stems(make sure the slot on the two swivels are facing the same direction). Secure the canopy by round plate, washer and hex nut.
- 8.Dress the fixture with crystal as illustrated.

J= -0000000000 K= -000000000000

S= -8000088 T= -800000000

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.





PART NUMBER MODEL #WIN-619-GA-CL-MWP

