




## ASSEMBLY INSTRUCTION MODEL#XAV-B9306-MK



3/4′′



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate






You will need 6-Medium Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated



- 1. Determine the preferred hanging height and adjust to the required rods.
- 2. Feed the wires through the rods and connect
- 3. Slip collar ring and canopy over the rod assembly.
- thread it into the top of the rod assembly.
- outlet box using two outlet box screws.
- screw collar, securing the canopy.
- 7. Install the metal shade onto the socket.
- 8. Install the bulb(not included) into the socket.

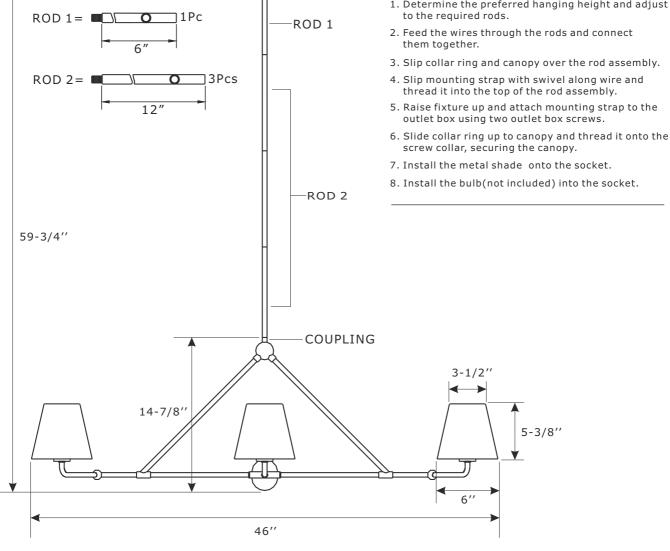





## ASSEMBLY INSTRUCTION MODEL#XAV-B9306-MK

## Part Number

## Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5"xH3/4" #XRF9302MKCAN5IN
- C. (1)-Collar ring
- D. (1)-Rod D1/2"xL6" #XRF9302MKROD6IN
- E. (3)-Rod D1/2"xL12" #XRF9302MKROD12IN
- F. (6)-Metal shade #XRF8321MKSHA6IN
- G. (6)-Socket

