

HYDROPRO Industrial Series

TECHNICAL SHEET

**Spun Polypropylene
Filter Cartridge**




TECHNICAL CHARACTERISTICS

Temperature rating : 40-145°C (4.4–62.8°C)

Filter media : 100% polypropylene fibers

Structure : coreless cartridge

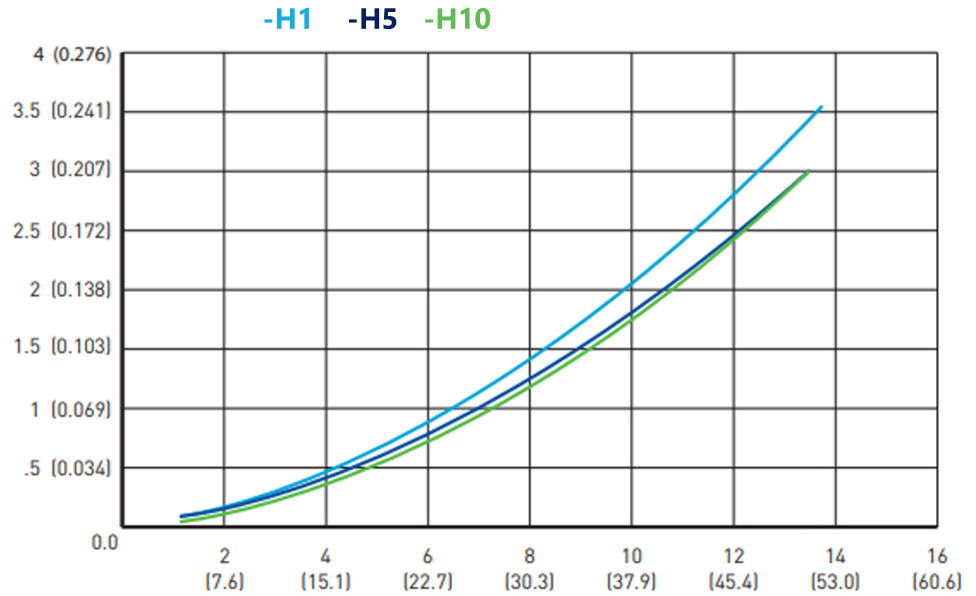

Model	Maximum Dimensions	Nominal Micron Rating
H1-10	2.44" x 10" (62 mm x 254 mm)	1 micron
H1-20	2.44" x 20" (62 mm x 508 mm)	1 micron
H1-30	2.44" x 30" (62 mm x 762 mm)	1 micron
H1-40	2.44" x 40" (62 mm x 1016 mm)	1 micron
H5-10	2.44" x 10" (62 mm x 254 mm)	5 micron
H5-20	2.44" x 20" (62 mm x 508 mm)	5 micron
H5-30	2.44" x 30" (62 mm x 762 mm)	5 micron
H5-40	2.44" x 40" (62 mm x 1016 mm)	5 micron
H10-10	2.44" x 10" (62 mm x 254 mm)	10 micron
H10-20	2.44" x 20" (62 mm x 508 mm)	10 micron
H10-30	2.44" x 30" (62 mm x 762 mm)	10 micron
H10-40	2.44" x 40" (62 mm x 1016 mm)	10 micron
H20-40	2.44" x 40" (62 mm x 1016 mm)	20 micron
H25-40	2.44" x 40" (62 mm x 1016 mm)	25 micron
H35-40	2.44" x 40" (62 mm x 1016 mm)	35 micron
BB H5-20	4.50" x 20" (114.3 mm x 508 mm)	5 micron

WARNING

Do not use with water that is microbiologically risky or of unclear quality without safe cleaning before or after the system.