

# Security Kiosk Dual Stand for 7-14 Inch Tablets PAD-AATTS





### **Package Contents**



support@ctadigital.com

#### Assemble the Stand

- 1) Place pole on base, insert 4 screws, and tighten with Allen key to connect.
- 2) Insert tablet holder onto lower pole opening, insert 2 screws, and tighten with Allen key to connect.
- 3) Insert tablet holder onto upper pole opening, insert 2 screws, and tighten with Allen key to connect.




#### Using the Stand

- 1) Place the stand on a flat surface and orient the holders vertically.
- 2) Pull back the lock catch at the rear of the holder. Place tablet corner diagonally into the fixed clamp end, then push sliding end down until it is firmly cradling tablet.



3) Push the lock catch in, then turn the key to lock in place.










- 1. Attach cable end to any permanent fixture using loop.
- 2. With key inside, insert lock end to slot on the stand.
- 3. Turn key and remove from lock to attach cable to stand.

## Cable 1 management Route cable 1 through the stand as shown below.

Note: cable routing must be done prior to building the stand.

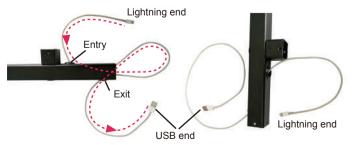

#### Cable 2 management

- 1. Route cable 2 through the stand as shown below.
- 2. Let the cable protector clamp the cable and press it against the stand.

