




Custom Flex Security Wall Mount

PAD-CFWMS


INSTRUCTION - MANUAL

CONTENTS:


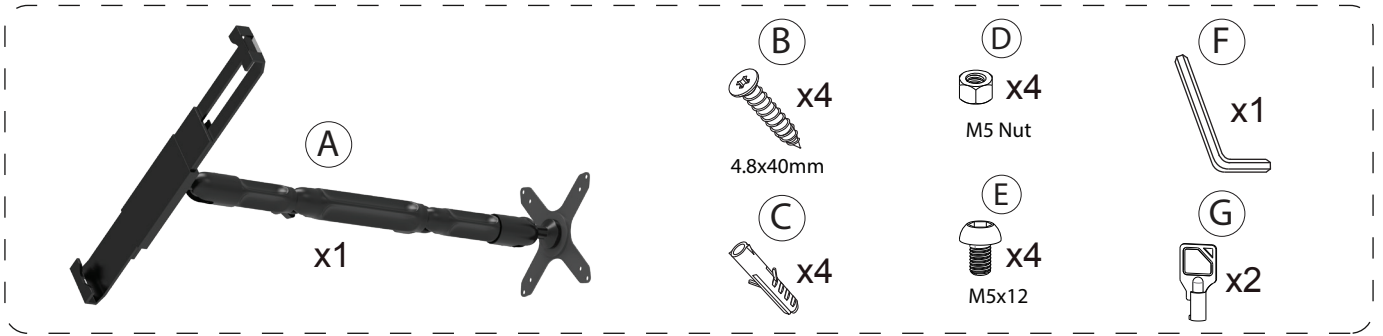


INSTRUCTIONS:


1. Installing the Custom Flex Wall Mount to the Wall




1a. Drill the holes in the wall to these specifications:
diameter: 6.5~7mm
depth: 40~45mm

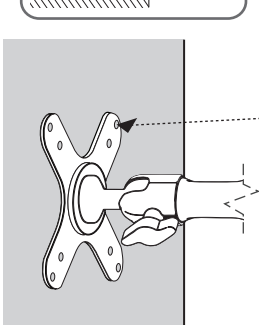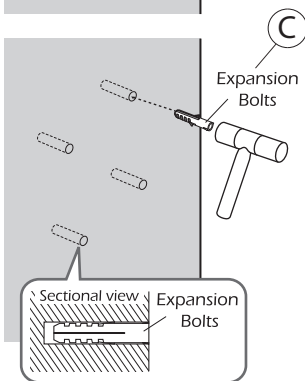

2. Inserting Tablet Into Holder

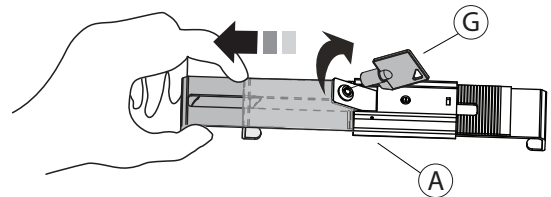

****Tablet only shown for illustration purposes, not included.**

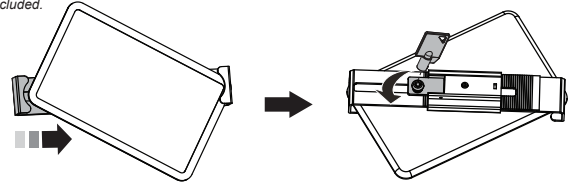


Adjusting Flex Arm



Twist the screw knob of the arms counter-clockwise to release the connection. Adjust the arms to your favorite position and then tighten the screw knob clockwise.

Adjusting Tablet Holder

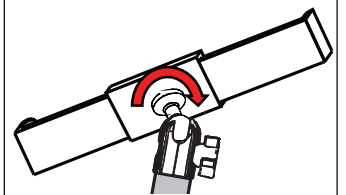

Tablet holder rotates 360° for custom viewing angles. **DO NOT** attempt to adjust, tilt, or rotate any ball socket joints while it is fully tightened. Such actions will result in possible damage and loss of integrity of product.