



## SUSPENSION WIRE BARREL BASE INSTALLATION BL-LP-S106X

### SINGLE CHANNEL PROFILE

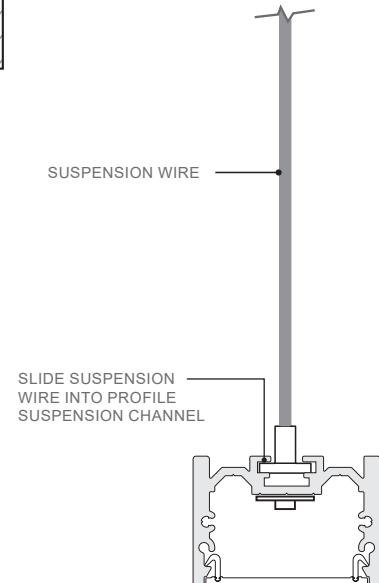

1. Slide suspension wires into suspension channel (maximum distance of 3 metres between wires).
2. Unscrew cable gripper from barrel base and use suitable screw (not supplied) to secure barrel base to support.
3. Thread suspension cable through cable gripper, then through barrel base and out the cable hole, then rescrew cable gripper.
4. **To adjust cable length:** While one person supports the profile, press the cable gripper button inwards and either tighten; by pulling excess cable up through cable hole or release; by pulling excess cable back down.
5. Suspension wires can be cut down to length once installed.

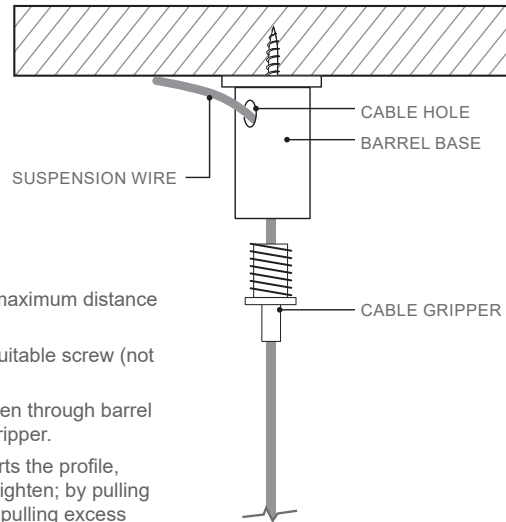

*Actual product characteristics may vary. Bright Light reserves the right to improve, modify or update the product designs without prior notice.*