



ANGLED SUSPENSION INSTALLATION BL-LP-S110A SINGLE CHANNEL PROFILE

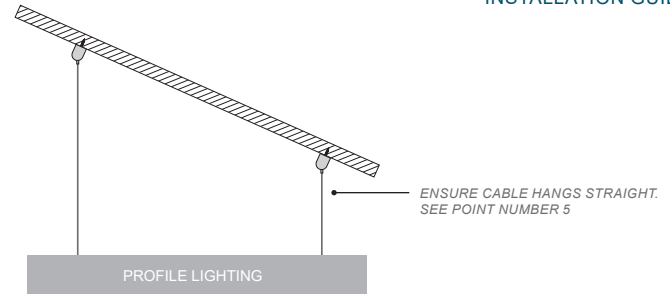

1. Unscrew base from angled barrel and screw mount base into suitable substrate.
2. Thread suspension wire through angled barrel slot and feed into cable gripper.
3. The cable can be pulled upwards through cable gripper and it will prevent cable from moving backwards. Button on cable gripper can be pushed in to release cable back through.
4. When the cable is at the desired length, fit cable gripper into angled barrel. Align the excess wire with the notch space in base and rescrew angled barrel onto base.
5. To ensure the cable hangs freely (straight downwards) the angle barrel may need to be loosened/unscrewed by up to half a turn. Excess wire can be cut off.
6. Slide suspension wires into suspension channel. Position suspension wires where desired (*maximum distance of 3 metres between wires*).

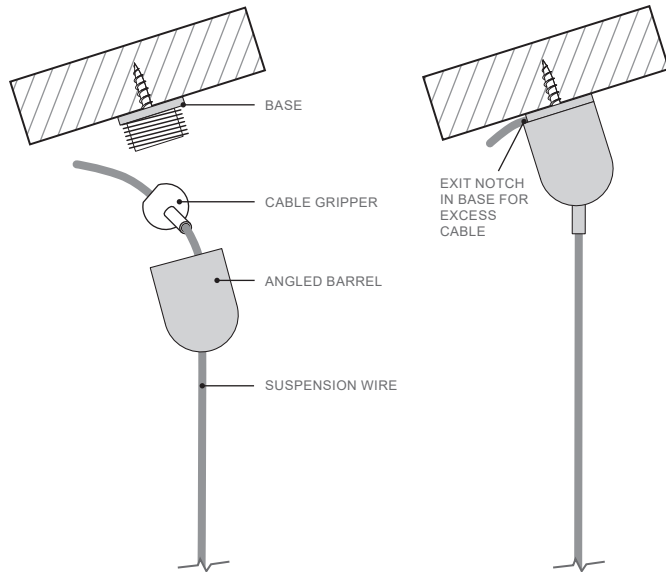