


4 WATTS PER METRE

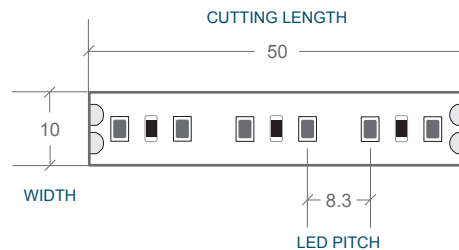

	COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
INDOOR	WARM WHITE 3000K	BL-LS-1000-WW	IP20 indoor use only	449lm/m	96lm/W
	NATURAL WHITE 4000K	BL-LS-1000-NW		460lm/m	98lm/W
	COOL WHITE 5000K	BL-LS-1000-CW		465lm/m	99lm/W
IP65	WARM WHITE 3200K	BL-LS-1000-WW-IP65	IP65 achieved with silicone spray	458lm/m	97lm/W
	NATURAL WHITE 4200K	BL-LS-1000-NW-IP65		457lm/m	97lm/W
	COOL WHITE 5700K	BL-LS-1000-CW-IP65		459lm/m	98lm/W

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	4.7W/m	CRI	≥80	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	120°		
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours		
MAX. RUN PER POWER FEED	15 metres	WARRANTY	3 years	CONTROL	Dimmable by PWM signal