


**12 VOLTS | 9 WATTS PER METRE**

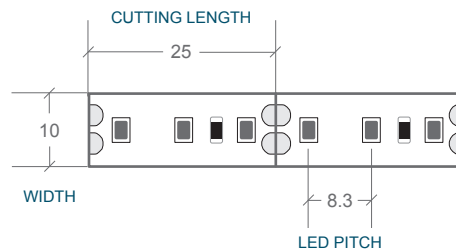

	COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
IP65	WARM WHITE 3200K	BL-LS-1001-WW-IP65-12V	IP65 achieved with silicone spray (can also be used indoors)	845lm/m	92lm/W
	NATURAL WHITE 4200K	BL-LS-1001-NW-IP65-12V		849lm/m	92lm/W
	COOL WHITE 5700K	BL-LS-1001-CW-IP65-12V		859lm/m	93lm/W
	BLUE 465-470nm	BL-LS-1001-B-IP65-12V		89lm/m	19lm/W

COLOUR VARIANCE +/- 200K  
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE

LED WATTS	9.2W/m	CRI	≥80	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	12V DC constant voltage	BEAM ANGLE	120°		
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours	CONTROL	Dimmable by PWM signal
MAX. RUN PER POWER FEED	10 metres	WARRANTY	3 years		