


13 WATTS PER METRE

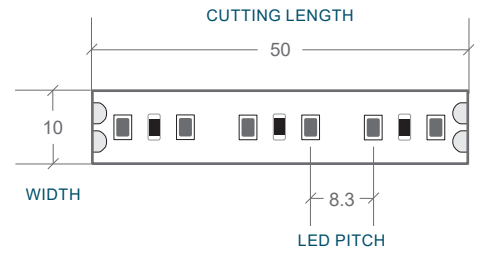

	COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
INDOOR	WARM WHITE 3000K	BL-LS-1002-WW	IP20 indoor use only	1129lm/m	88lm/W
	NATURAL WHITE 4000K	BL-LS-1002-NW		1160lm/m	91lm/W
IP65	WARM WHITE 3200K	BL-LS-1002-WW-IP65	IP65 achieved with silicone spray	1064lm/m	83lm/W
	NATURAL WHITE 4200K	BL-LS-1002-NW-IP65		1165lm/m	91lm/W
	COOL WHITE 5700K	BL-LS-1002-CW-IP65		1181lm/m	92lm/W

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	12.8W/m	CRI	≥80	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	120°		
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours		
MAX. RUN PER POWER FEED	10 metres	WARRANTY	3 years	CONTROL	Dimmable by PWM signal