


TUNEABLE WHITE

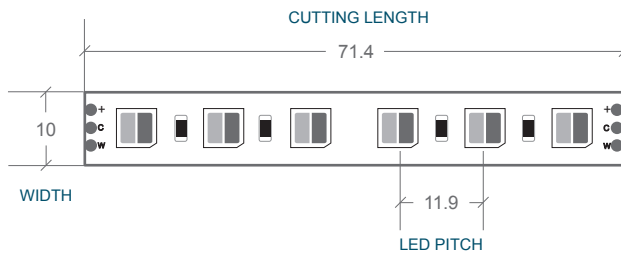

COLOUR	CODE	INGRESS PROTECTION
2700–6500K TUNEABLE	BL-LS-3002-IP65	IP65 achieved with silicone spray

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	12W/m	LUMENS	2700K 1080lm/m 6500K 1140lm/m	MOUNTING	3M adhesive backing <i>A Bright Light approved aluminium profile for thermal management is required</i>
INPUT VOLTS	24V DC constant voltage	CRI	≥80	CONTROL	Requires 2-channel controller
OPERATING TEMP.	-20°C ~ +60°C	BEAM ANGLE	120°	NOTE	<i>IP65 means water-resistant not waterproof. Consider outdoor usage carefully & ensure adequate drainage</i>
MAX. RUN PER POWER FEED	5 metres	SOURCE LIFE	50,000 hours		
		WARRANTY	3 years		