


COB 16W/M RGBW

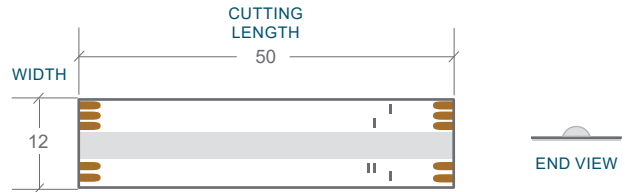


COLOUR	CODE	INGRESS PROTECTION
RGBW	 BL-LS-COB16-RGBW	IP20 - Interior use only

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	16W/m (4W/m per channel)	COLOUR TEMPERATURE	3000K (white chip only)	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	24V DC constant voltage	CRI	≥90 (white chip only)		
OPERATING TEMP.	-25°C ~ +45°C	LUMENS	R 104lm/m G 336lm/m B 96lm/m W 344lm/m	CONTROL	Requires 4-channel controller
MAX. RUN PER POWER FEED	5 metres	NUMBER OF CHIPS	560 LED/m		
		BEAM ANGLE	180°		
		SOURCE LIFE	50,000 hours		
		WARRANTY	3 years		

ACCESSORIES	CODE
5-CORE CABLE FOR RGBW COB 500MM	BL-LS-COB16-5CCAB



CABLE:
Due to the nature of RGBW COB, the solder pads are smaller than standard ribbon. We strongly recommend the use of the our 5-core RGBW COB cable.