


## 6W/M COB RIBBON | IP20

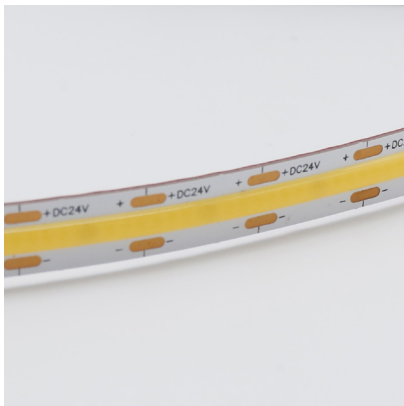

COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
WARM WHITE 3000K	BL-LS-COB6-WW	IP20 General interior use	563lm/m	94lm/W
NATURAL WHITE 4000K	BL-LS-COB6-NW		649lm/m	108lm/W

COLOUR VARIANCE +/- 200K  
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE

LED WATTS	6W/m	CRI	≥90	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile is required for thermal management
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	180°		
OPERATING TEMP.	-25°C ~ +50°C	NUMBER OF CHIPS	480 LED/m	CONTROL	Dimmable by PWM signal
MAX. RUN PER POWER FEED	5 metres	SOURCE LIFE	50,000 hours		
		WARRANTY	3 years		

ACCESSORIES	CODE
INLINE QUICK CONNECTOR	BL-LS-COB-MC
POWER FEED 490MM QUICK CONNECTOR	BL-LS-COB-PF
FLEXIBLE 80MM QUICK CONNECTOR	BL-LS-COB-FC



BL-LS-COB-MC



BL-LS-COB-PF



BL-LS-COB-FC