


9W/M COB RIBBON | IP20

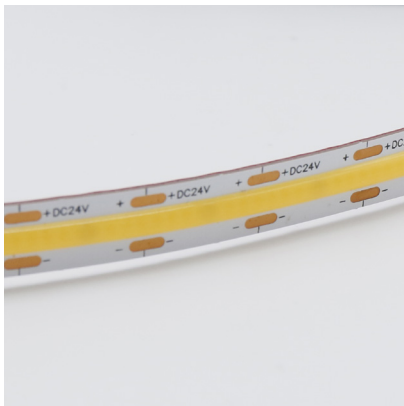

COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
WARM WHITE 3000K	BL-LS-COB9-WW	IP20 General interior use	769lm/m	85lm/W
NATURAL WHITE 4000K	BL-LS-COB9-NW		875lm/m	97lm/W

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	9W/m	CRI	≥90	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile is required for thermal management
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	180°		
OPERATING TEMP.	-25°C ~ +50°C	SOURCE LIFE	50,000 hours	CONTROL	Dimmable by PWM signal
MAX. RUN PER POWER FEED	5 metres	WARRANTY	3 years		

ACCESSORIES CODE

INLINE QUICK CONNECTOR	BL-LS-COB-MC
POWER FEED 490MM QUICK CONNECTOR	BL-LS-COB-PF
FLEXIBLE 80MM QUICK CONNECTOR	BL-LS-COB-FC
9W 24V 90° LED CONNECTOR	BL-LS-COB9-90-XX

XX = (WW) 3000K WARM WHITE OR (NW) 4000K NATURAL WHITE



BL-LS-COB-MC



BL-LS-COB-PF



BL-LS-COB-FC



BL-LS-COB9-90-XX