


**SPI 2-CHANNEL SIGNAL AMPLIFIER**

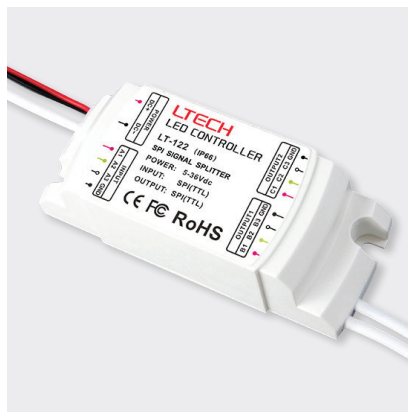

CODE
BL-PC-LT122

FUNCTION
<ul style="list-style-type: none"> <li>- Will expand, amplify and distribute SPI signal across an installation</li> <li>- Can be used with BL-PC-LTDMX1809 and BL-PC-LT200 SPI Controllers</li> </ul>

INPUT	OUTPUT	VOLTS
SPI (TTL)	2CH SPI (TTL)	5-36V DC Constant Voltage

DIMENSIONS	W37 × L92 × H30mm
HOUSING	Plastic
MOUNTING	Screw mounting holes
WARRANTY	5 years

OPERATING TEMP.	-30°C ~ +55°C
INGRESS PROTECTION	IP67
CONNECTION METHOD	Hardwired cable
CONTROL	SPI or DMX to SPI

COMPLIANCE	
------------	---

MAX. DISTANCE FROM POWER SUPPLY	Recommended under 10 metres <i>For specific projects contact Bright Light</i>
---------------------------------	--