


FLEX TILE



SHOWING RGB

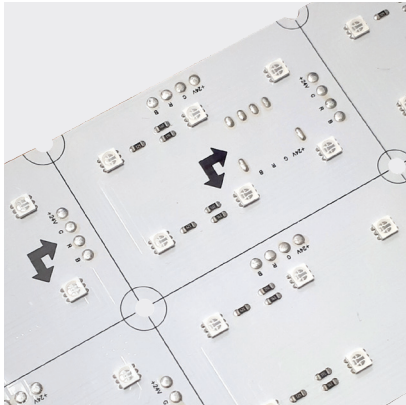

APPLICATION


Ideal for ceiling lighting features or light boxes (min depth 40mm).

COLOUR	CODE	WATTAGE / SHEET	LED QUANTITY / SHEET	LUMENS / SHEET	EFFICACY / SHEET	CUTTABLE SECTIONS / SHEET
WARM WHITE 3000K	BL-SS-2000-3K	10W	288	978lm	98lm	4 × 12
NATURAL WHITE 4000K	BL-SS-2000-4K			1046lm	105lm	
TUNEABLE WHITE 2700–6000K	BL-SS-2000-TW	15W	576	1456lm	97lm	4 × 12
RGB	BL-SS-2000-RGB	18W	162	665lm	37lm	3 × 9


COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD PER SHEET

INPUT VOLTS	24V DC constant voltage	CRI	≥80 <i>(Warm white and Natural white only)</i>	LED PITCH	3K / 4K / TW 20mm RGB 26.6mm
OPERATING TEMP.	-25°C ~ +45°C	BEAM ANGLE	120°	DIMENSIONS	W240 × L480mm sheet <i>Sheets are made up by smaller cuttable sections</i>
MAX. SHEETS PER CIRCUIT	10	SOURCE LIFE	35,000 hours	MOUNTING	3M adhesive backing and provision for screw mounting
		WARRANTY	5 years	INGRESS PROTECTION	Indoor use only
				CONTROL	Dimmable by PWM signal

WARM WHITE, NATURAL WHITE, TUNEABLE WHITE

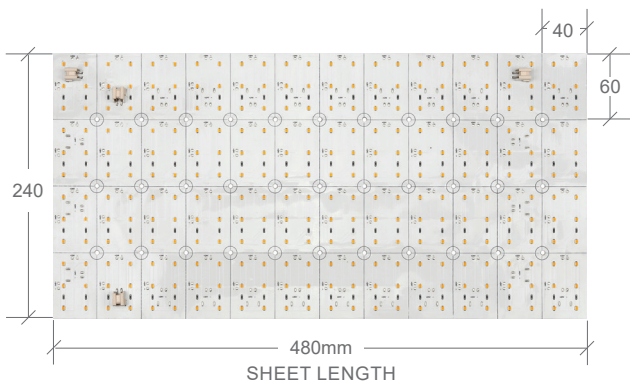

RGB

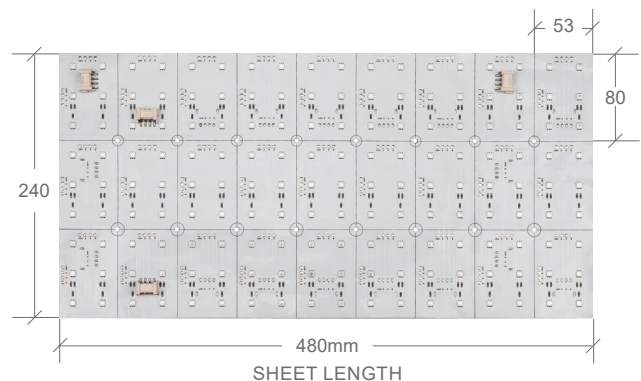

FLEX TILE ACCESSORIES


ACCESSORIESSOLDINDIVIDUALLY

WARM WHITE, NATURAL WHITE


CODE	DESCRIPTION
BL-SS-2000-AC-1	FLEX TILE JOINER CLIP (WHITE) 53MM
BL-SS-2000-AC-4	FLEX TILE TERMINAL (WHITE)
BL-SS-2000-AC-7	FLEX TILE PLAIN WIRE (WHITE) 200MM
BL-SS-2000-AC-8	FLEX TILE POWER FEED (WHITE) 450MM



BL-SS-2000-AC-1



BL-SS-2000-AC-4




BL-SS-2000-AC-7



BL-SS-2000-AC-8

TUNEABLE WHITE


CODE	DESCRIPTION
BL-SS-2000-AC-2	FLEX TILE JOINER CLIP (TUNEABLE WHITE) 57MM
BL-SS-2000-AC-5	FLEX TILE TERMINAL (TUNEABLE WHITE)
BL-SS-2000-AC-9	FLEX TILE POWER FEED (TUNEABLE WHITE) 200MM



BL-SS-2000-AC-2



BL-SS-2000-AC-5




BL-SS-2000-AC-9

RGB

CODE	DESCRIPTION
BL-SS-2000-AC-10	FLEX TILE JOINER CLIP (RGB) 82MM
BL-SS-2000-AC-6	FLEX TILE TERMINAL (RGB)
BL-SS-2000-AC-3	FLEX TILE POWER FEED (RGB) 200MM



BL-SS-2000-AC-10



BL-SS-2000-AC-6



BL-SS-2000-AC-3