

INJECTION MOULDING IP68 | HORIZONTAL BENDING PRODUCTS


IP67 MAX FOR MICRO ARC HB & CLASSIC / EDGE SAUNA PRODUCTS

NAME: _____ QUOTE NO (IF KNOWN): _____ PHONE / EMAIL: _____

REFERENCE	QUANTITY	CODE	CONNECTOR OPTION	WRITE LENGTH (MM)	CONNECTOR OPTION	WRITE LENGTH (MM)	CONNECTOR OPTION	ENVIRONMENT: INDOOR, OUTDOOR OR UNDERWATER
EXAMPLE: TYPE A1	3	BL-LS-4400S	E	4500MM	BFC	2000MM	EC	OUTDOOR
EXAMPLE: TYPE A2	1	BL-LS-4030S-30	S-01R	3300MM	EC	-	-	UNDERWATER

CONNECTOR OPTIONS

POWER ENTRY TYPES

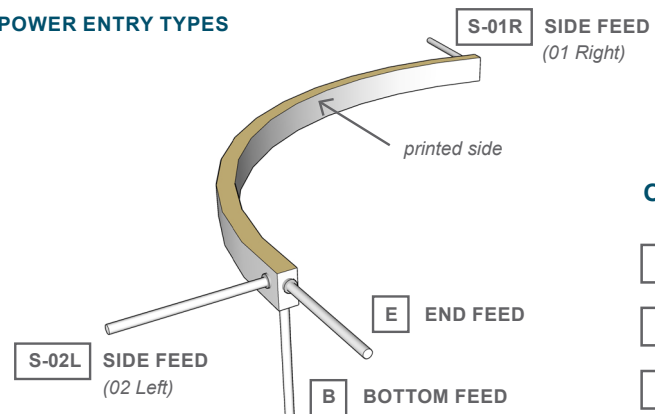

! Power feed cables are 1 metre as standard, but can be longer by request.

OTHER CONNECTIONS

- EC** END CAP
- EFC** 300MM FLEXIBLE CONNECTOR (END FEED)
- BFC** 300MM FLEXIBLE CONNECTOR (BOTTOM FEED)


NOTE: S-02L IS NOT AVAILABLE FOR RGB CHASING PRODUCTS.

! Connections are made at factory and lead times apply

! Ferrule come as standard for all IP67 and above connections and are strongly recommended to protect from water ingress within cable.

If ferrule will not fit within your installation, you can chose to not have them included. However without ferrule, any damage from water ingress will not be covered by the warranty.

See installation guide for more information on ferrule.

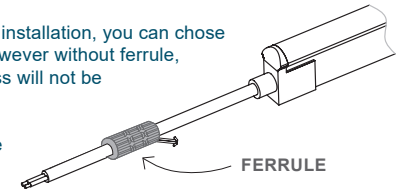

Check all connector measurements on the models installation guide which provides dimensions.

Download from the Bright Light website.