
BRIGHTLIGHT


INJECTION MOULDING IP68 | VERTICAL BENDING PRODUCTS

IP67 MAX FOR MICRO ARC VB & ARC SAUNA PRODUCTS

NAME:	QUOTE NO (IF KNOWN):	PHONE / EMAIL:

REFERENCE	QUANTITY	CODE	CONNECTOR OPTION	WRITE LENGTH (MM)	CONNECTOR OPTION	WRITE LENGTH (MM)	CONNECTOR OPTION	ENVIRONMENT: INDOOR, OUTDOOR OR UNDERWATER
EXAMPLE: LEVEL 1	2	BL-LS-4800S-40	S-01L	3000MM	EC	-	-	INDOOR
EXAMPLE: POOL	3	BL-LS-4800S-30	В	3300MM	EFC	1200MM	EC	UNDERWATER

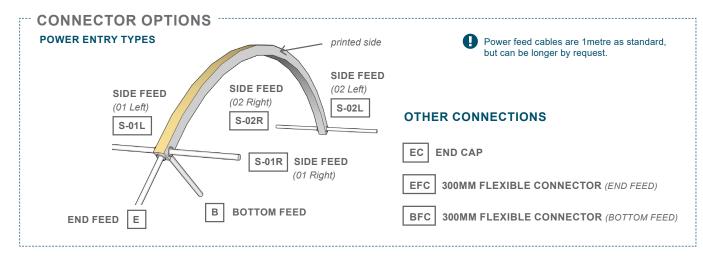



Check all connector measurements on the models installation guide which provides dimensions.

Download from the Bright Light website.

0800 952 000 | www.brightlight.co.nz | **BRIGHT**LIGHT