




BASELINE 08

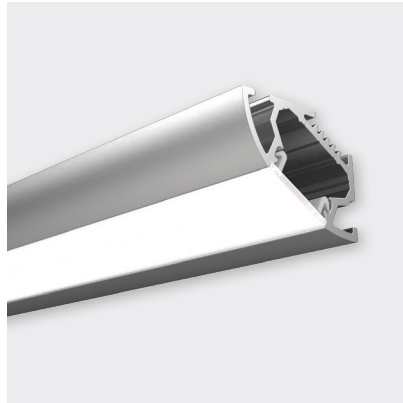

FEATURES

- Interchangeable angle of 30° or 60° dependant on mounting position
- W32mm × H25mm
- Rolled opal diffuser (continuous up to 50m)
- Anodised aluminium, black, or white powder-coat
- Surface mount
- Provides thermal management for LED ribbon up to a maximum of Pro 30 or equivalent
- Where the profile is mounted with indirect light glare management is not required and provided thermally safe, can have higher wattage LED products


FINISH	DIFFUSER	CODE
ANODISED		BL-LP-B08ARO-XX
BLACK	ROLLED OPAL	BL-LP-B08BRO-XX
WHITE		BL-LP-B08AWO-XX

XX = (2M) 2 METRE or (4M) 4 METRE LENGTHS

ACCESSORY	CODE
ALUMINIUM RIGHT & LEFT END CAP 2 PACK W32 × H25.25 × D2MM	BL-LP-B08X-EC-P
ALUMINIUM LEFT END CAP	BL-LP-B08X-LEC
ALUMINIUM RIGHT END CAP	BL-LP-B08X-REC

X = (A) ANODISED, (B) BLACK, OR (W) WHITE

DIMENSIONS

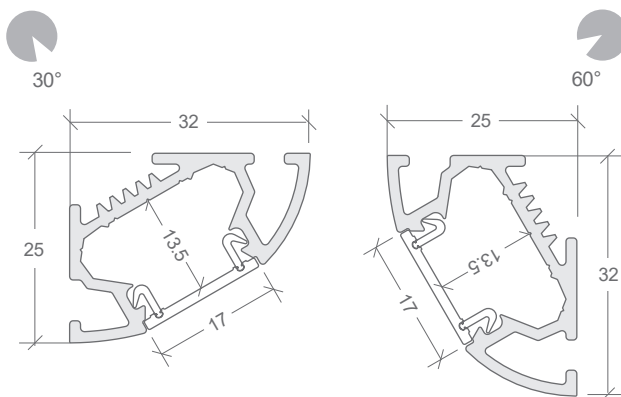

INSTALLATION

