

ENCAPSULATED | DUO




COLOUR	CODE	LUMENS
3000K WARM WHITE	BL-LS-4375-30	≥450lm/m
4000K NATURAL WHITE	BL-LS-4375-40	≥450lm/m


COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	7.2W/m	CRI	≥90	MINIMUM BEND RADIUS	60mm
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	160°	BEND DIRECTION	Vertical & Horizontal bending
OPERATING TEMP.	-20°C ~ +55°C	SOURCE LIFE	50,000 hours	CUTTING LENGTH	41.66mm
MAX. RUN PER POWER FEED	5m using one feed 10m using two feeds	WARRANTY	3 years	DIMENSIONS	W15 × H15mm (W17mm for connectors)
				INGRESS PROTECTION	Protection established by use of IP66 connections
				HOUSING	UV resistant Silicone
				CONTROL	Dimmable by PWM signal


DIMENSIONS



MINIMUM BEND RADIUS



BEND DIRECTION

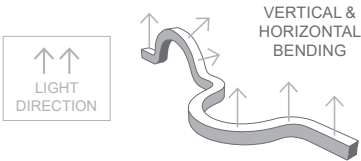

Connectors & end caps require sealing internally with silicone for IP66 protection.

ACCESSORY	CODE
END FEED CONNECTOR IP66	BL-LS-4380
END CAP IP66	BL-LS-4381
ALUMINIUM MOUNTING PROFILE 1000MM	BL-LS-4382
CURVE PROFILE 1000MM (COMES IN 2 × 500MM PIECES)	BL-LS-4383



END FEED CONNECTOR



END CAP



ALUMINIUM MOUNTING PROFILE 1000MM



CURVE PROFILE 1000MM