




## LOWLINE 05

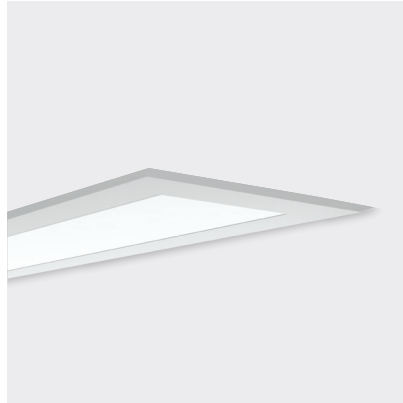

### FEATURES

- W55mm × H24mm (with 10mm trim)
- Opal polycarbonate diffuser
- Anodised aluminium, black or white powder-coat finishes
- Recess with screw-fix or via mount clip
- Wide trim ensures clean finish
- Provides thermal management for LED ribbon up to a maximum of Pro 30 or equivalent.
- For best visual performance, LED ribbon up to a maximum of Pro 12 or equivalent is recommended for glare management.


FINISH	DIFFUSER	CODE
ANODISED	OPAL	BL-LP-L05AO-XX
BLACK		BL-LP-L05BO-XX
WHITE		BL-LP-L05WO-XX

XX = (2M) 2 METRE or (4M) 4 METRE LENGTHS

ACCESSORY	CODE
ALUMINIUM END CAP W55 × H24.9 × D2MM (D12MM INCL TRIM)	BL-LP-L05X-EC
LOWLINE 05 MOUNTING CLIP (EACH)	BL-LP-L05-MC
JOINER STRAIGHT	BL-LP-J101S
JOINER 90° CORNER	BL-LP-J102C
JOINER 120° CORNER	BL-LP-J121C
JOINER VERTICAL TO HORIZONTAL	BL-LP-J103VH

X = (A) ANODISED, (B) BLACK, OR (W) WHITE


### DIMENSIONS

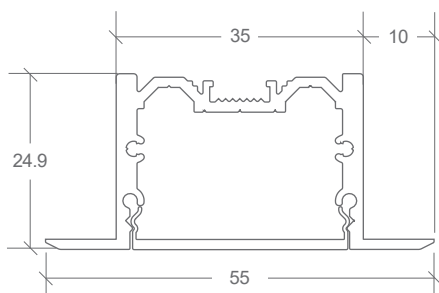

### INSTALLATION

Recess - rebate groove can be between 40–50mm wide.  
See installation guide for more detailed instructions

#### SCREW-FIT

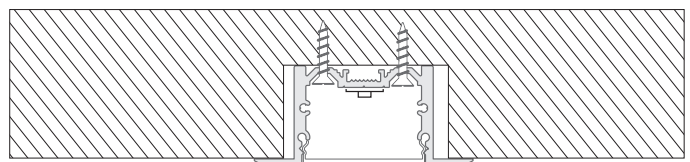

#### MOUNTING CLIP - Suitable for up to 15mm ceiling

