

PROLINE


NZ/AUSTRALIA DOMESTIC



COLOUR	CODE	WATTS	LENGTH	LUMENS	CRI
NATURAL WHITE 4000K	IR-PL-1202-NW-880	12W	880mm	1150 lm	>80
	IR-PL-1502-NW-1180	15W	1180mm	1500 lm	
	IR-PL-1802-NW-1480	18W	1480mm	1820 lm	
RED/WHITE *	IR-PL-1802-RW-1180	18W	1180mm	1350 lm	>85
	IR-PL-2302-RW-1480	23W	1480mm	1660 lm	

* RED: 620-630NM / WHITE: 6000-7000K


INPUT VOLTS	24V DC Constant Voltage	SOURCE LIFE	50,000 hrs	HOUSING	Aluminium profile with moulded end caps and power feeds
OPERATING TEMP.	-5°C ~ +50°C	WARRANTY	5 years	MOUNTING	3 × stainless steel mounting clips required per light bar installed
MAX. RUN PER POWER FEED	3 × light bars				

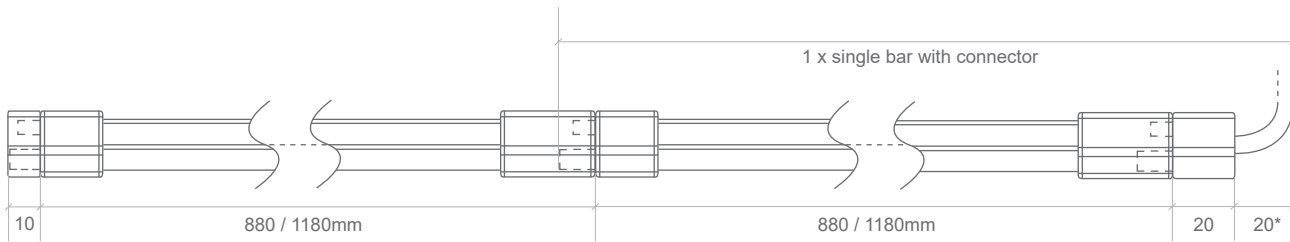


*Allow 20mm for the cable to fit

ACCESSORIES


ACCESSORY	LENGTH	CODE
LED TO FEMALE IP67 CONNECTOR HARNESS	400mm	IR-PL-HN0101-400
MALE IP67 CONNECTOR TO MOLEX HARNESS	2000mm	IR-PL-HN0103-2000
LED CONNECTOR TO TIN-COATED WIRES	1500mm	IR-PL-HN0105-1500
	2000mm	IR-PL-HN0104-2000
LED TO LED CONNECTOR	150mm	IR-PL-HN0107-150
MALE IP67 CONNECTOR HARNESS TO TIN-COATED WIRES	2800mm	IR-PL-HN0110-2800
STAINLESS STEEL MOUNTING CLIP		IR-PL-CL02-SS
BLANK END CAP		IR-PL-HN0108-EC




IR-PL-HN0101-400




IR-PL-HN0103-2000



IR-PL-HN0105-1500
IR-PL-HN0104-2000




IR-PL-HN0107-150



IR-PL-HN0110-2800



IR-PL-CL02-SS



IR-PL-HN0108-EC