



TRIAC DIMMABLE POWER SUPPLY | IP20

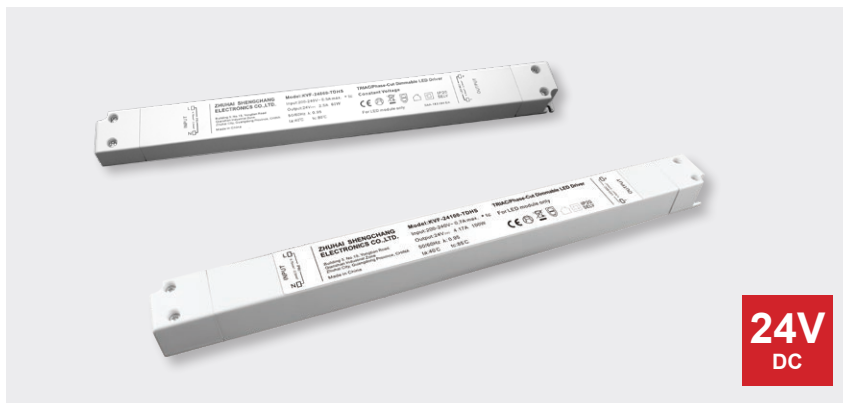

CODE	OUTPUT WATTS	OUTPUT AMPS	POWER FACTOR	AC INRUSH CURRENT	DIMENSIONS
BL-PS-60TD-24	60W	2.5A	0.96	50A, 50%, 136us@230VAC	W30 × H18.5 × L300mm
BL-PS-100TD-24	100W	4.17A	0.96	52A, 50%, 210us@230VAC	W30 × H22 × L330mm

INPUT VOLTS	200–240V AC	WARRANTY	3 years	HOUSING	Plastic
REQUIRED LOAD	10% minimum	COMPLIANCE		INGRESS PROTECTION	IP20
OPERATING TEMP.	-40°C ~ +60°C			ELECTRICAL PROTECTION	Overload, short circuit and overheat
				CONNECTION METHOD	Concealed screw terminals
				CONTROL	TRIAC dimmable