


24V POWER SUPPLIES | IP65



150W

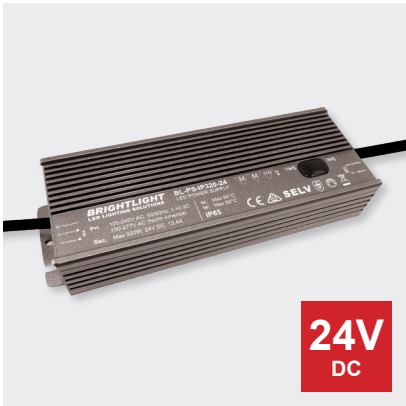


320W

ADJUSTABLE CURRENT & VOLTAGE

- Adjustable output current (set to the max output amps by default)
- Adjustable voltage range (set to 24V by default)

CODE	OUTPUT WATTS	OUTPUT AMPS	CURRENT ADJUSTMENT RANGE	VOLTAGE ADJUSTMENT RANGE	AC INRUSH CURRENT	DIMENSIONS
BL-PS-IP150-24	150W	6.3A	3.8–6.3A	22–27V DC	75A peak @ 230V	W61.5 × H36.5 × L220.8mm
BL-PS-IP250-24	250W	10.4A	6–10.4A	22–27V DC	45A peak @ 230V	W73.5 × H38 × L225.2mm
BL-PS-IP320-24	320W	13.4A	6.7–13.4A	22–27V DC	45A peak @ 230V	W84 × H41.3 × L246mm

INPUT VOLTS	100–240V AC 50/60Hz	POWER FACTOR	0.95	HOUSING	Aluminium
OPERATING TEMP.	–40°C ~ +60°C	WARRANTY	3 years	INGRESS PROTECTION	IP65
DISTANCE FROM INSTALLATION (Secondary Output)	Recommended under 10 metres	COMPLIANCE		ELECTRICAL PROTECTION	Overload, short circuit, overheat, and automatic re-start
				CONNECTION METHOD	<i>Input:</i> 300mm double-insulated 3-core flex <i>Output:</i> 300mm double-insulated 2-core flex
				CONTROL	Dimmable on the secondary output only by PWM